



LED COLLECTION

DESIGN | PERFORMANCE | RELIABILITY



The Company

Zodiac Lighting Limited was incorporated in Hong Kong on 1st October 1988. With combined over a century of experience in lighting industry, the founders came together and led the company to its success at present days.

The Mission

Zodiac is to provide unparalleled services to our business partners and customers by offering expert lighting consultancy and quality lighting products. We will be the company of choice by providing products and services beyond expectations and building the highest level of trust with our customers.



Milux




Reliable, functional design, technical performance, versatility, durable, maintenance convenience; they are the product development obsessions of MILUX. With more than 30 years in producing lighting products, our production team has assimilated their experience and innovation technology to lead the market in aesthetics as well as performance at internationally recognised standards.

In order to guarantee the highest quality level from raw material to final stage inspection, our quality control system plays an important role in our production process. In addition to the propriety product from our collection, the production team also has the capability to customise and develop client's original design to a certified product. MILUX is an obvious solution to cater for your wide range of applications with a competitive price range in the market.

LED Development



Zodiac has been focusing in this area in recent years to developed a series of LED fitting to cope with the rapidly evolving LED applications. We believe that LED technology is the future of the lighting industry and high quality lighting assignments on LED products, from effect and signal application to general usage of light, will be essential.

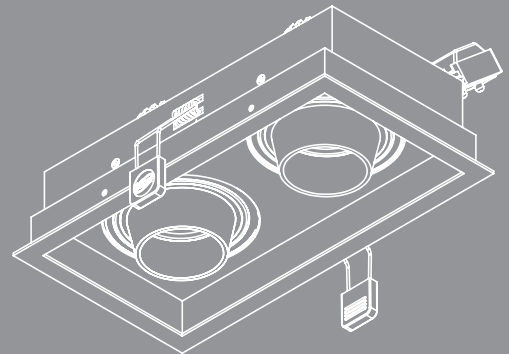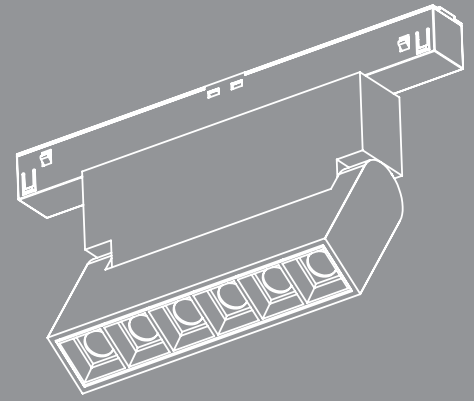

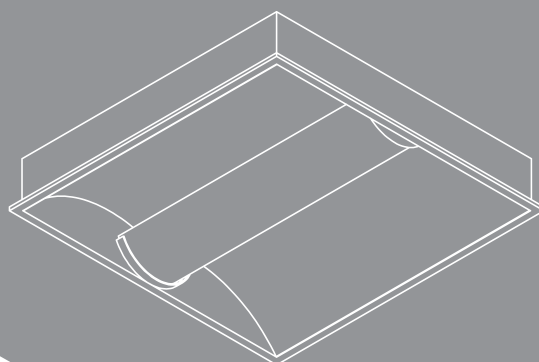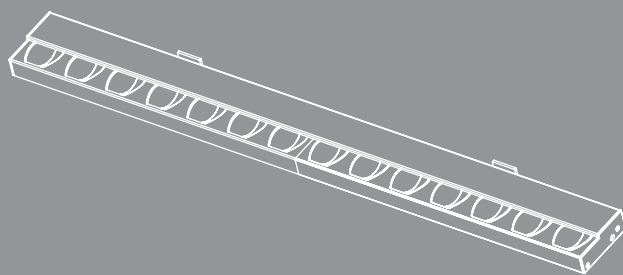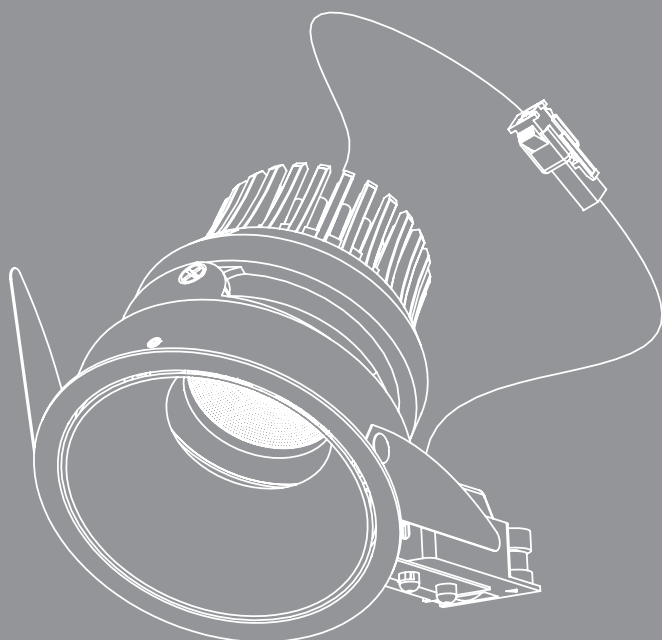

OEM & ODM Services

Milux employs a dedicated OEM and ODM team of experienced engineers and designers to create luminaires to your specification. Our expertise ensures your designs meet with industry standards and maintain high levels of quality and finish. We oversee every step of the process from design, manufacturing to after sales customer service and offers the safest, most reliable and cost effective LED solution.

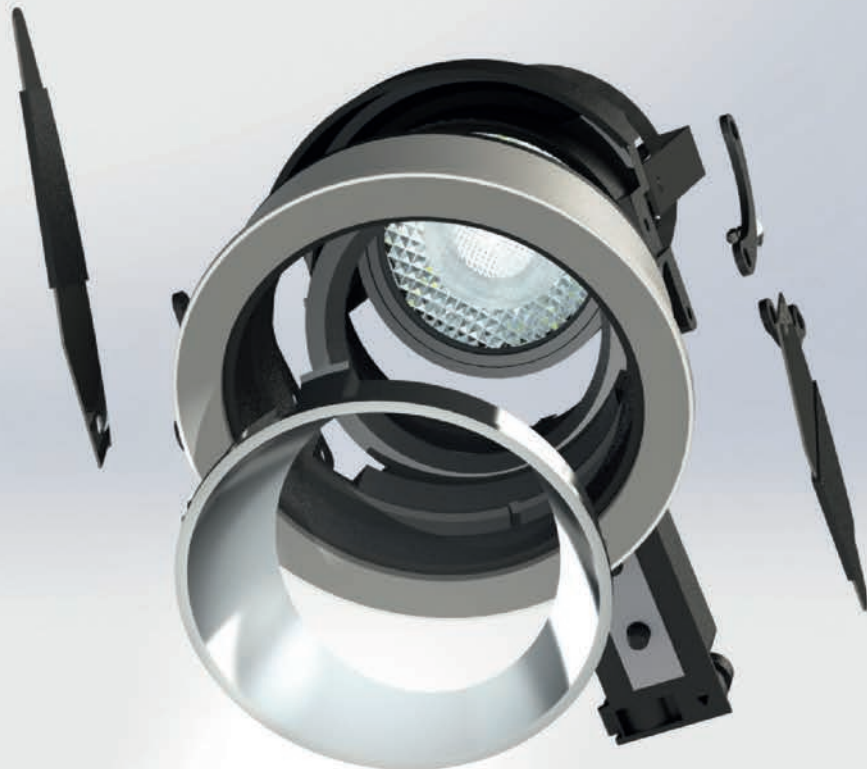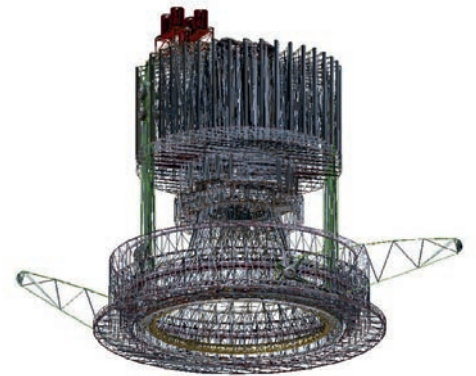

Concept Design



Research & Development



Calculation



Production



LED Lifetime

One of the benefits of the LED is its long lifetime. New international standards on how lifetime should be declared on LED luminaires are IEC 62717 (LED-modules for general lighting – Performance requirements) and IEC 62722-2-1 (Particular requirements for LED luminaires).

L-value

L70 is a lifetime measurement criterion to evaluate the useful lifetime of an LED luminaire in terms of the expected number of operating hours (minimum 6,000 h) until the light output has diminished to 70% of initial levels. or when the lumen output is 70% of its initial output.

As LEDs do not fail and “burn out” like other light sources; instead, they gradually decrease over time until they are no longer producing useful light. It is generally established that the human eye is only sensitive to lumen depreciation of 30% or more.

B-value


B-Value describes the failure fraction. It expresses the variation/ uncertainty of the expected lumen level. The B-value is normally B50 and indicates that the declared L-value will be achieved by 50 % of the luminaires. It can be seen as an average value. If the B-value is B10 it means that 90 % of the luminaires will meet the declared L-value. A B10 value is therefore better than B50 but it may not be available for all products.

C-value

The C-value describes the expected percentage of catastrophic fails during the life time for the LED-module. A catastrophic failure is when the LED-module does not produce any light. Failure of a single or several LEDs in a cluster is not included. These kinds of failures are included in the B-value. The C-value can e.g. be C10 or lower. C10 which means that after the given time, 10 % of the LED-modules may have failed.

F-value

The F value is a sum of both gradual (B-value) and total failures (C-value) ($F = B + C$).

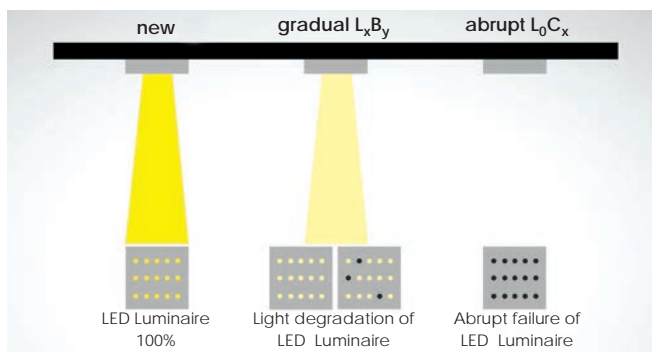

For example: B50 (for L70) and F10

lumen maintenance lifetime when lumen output of 50% of the LED lighting drops below 70% of the initial lumen output, and failure time when 10% of the LED lighting had conventional lights out failure.


Colour Consistency

Standard Deviation Colour Matching (SDCM)


SDCM has the same meaning as a “MacAdam ellipse”.

The MacAdam ellipse is a system of colour measurement. It measures how much colour variation is possible around these axes, before the human eye detects a colour change. A series of ellipses can then be drawn around any target colour, and the closer to the target lamp, the less colour deviation will be experienced when these lamps are placed side by side in an installation.

The distance from the target point in each ellipse is measured in SDCM. An SDCM of 1 step means that there is no colour difference between LED chips, 2-3 SDCM means that there is hardly visible colour difference while 4 or more SDCM is readily noticeable. The lower the number of SDCM, the smaller the colour shift.

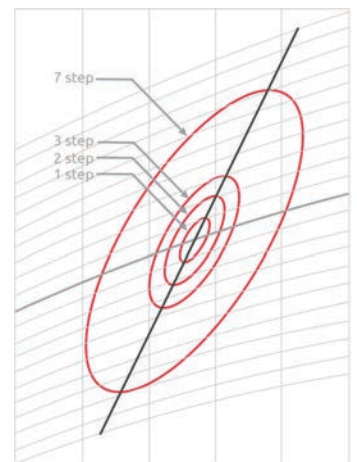

The requirements for most indoor environments are usually around MacAdam 2-3 SDCM. For most exterior applications, a rating of MacAdam 5 SDCM is perfectly acceptable.

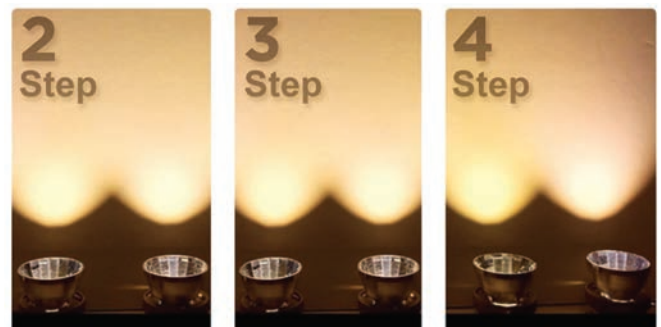

Colour Appearance

Correlated Colour Temperature (CCT)


Correlated Colour Temperature (CCT) is the relative colour appearance of a white light source. It's measured in the Kelvin (K) unit and is the most commonly found between 2200K degrees and 6500K degrees.

By adjusting the CCT of light source can completely change the look and mood of a space. Cooler colour temperatures (>4000K) offer a bluer white light, helping to create brighter, more energetic spaces; Warmer colour temperatures (2200K – 3000K) impart a yellowish white, creating a warmer and relax ambience.




Warm

Cool

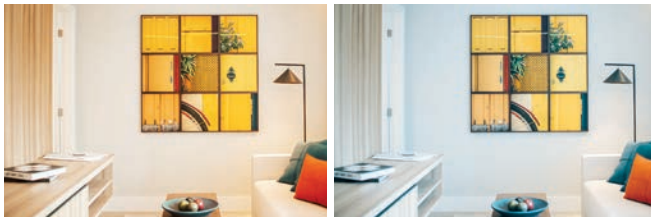

Colour Gamut Index (GAI)

Colour Gamut Index (Rg) refer to the average level of saturation relative to familiar illuminants. Normally, the GAI index in between 60-140, An Rg score that is around 100 that means the light source can produce colours with a similar level of saturation as the sun at daylight. The higher scores represent higher levels of saturation. When the score is above 100, the colour will be more intense than it's natural colour in the sunlight.

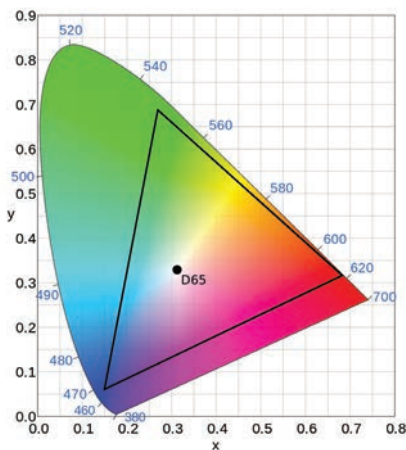

High GAI



Low GAI

Colour Rendering Index (CRI)


Colour rendering index (Ra) refers to the average colour rendition of particular light source (R1 – R8), with 100 being the highest. However, for particular colour spectrum, it may perform relatively low, especially in R9 for red colour and R15 for human skin representation. Therefore, in a true high CRI light source, the average performance of every colour spectrum is important to present the lighting object, especially R9 and R15, are the most commonly use to indicate colour quality in general lighting applications.



High CRI




Low CRI

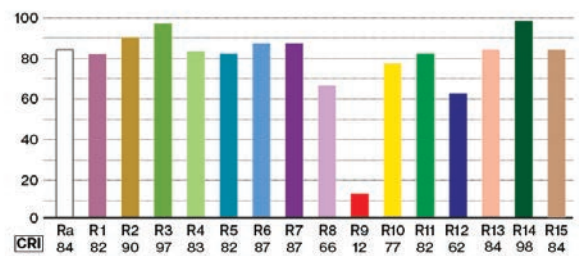

TM-30

TM-30-15 is a new standard that tackles LED module having a good score at Ra while having a poor colour spectrum overall. TM-30-15 comes with the Colour Fidelity Index with the same quality scale up to 100 but with greatly increased benchmark precision due to the increase from 8 test colours to 99.

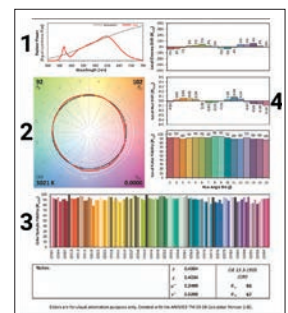

The TM-30 method generates two major numeric indices – Rf for colour fidelity (0-100 scale) and Rg for gamut (0 to greater than 100).



Milux lighting collection actively employs Xicato LED modules in the design for its advance specification.

The luminaries design optimises the Xicato LED modules performances by providing an efficient heat management system and superior glare control through the development of our in-house research team.

Why Xicato LED Module ?

Xicato is a leading provider of LED modules for retail, hospitality and special lighting environment and prides itself in delivering precision colour and high luminous efficacy. The advance performance of Xicato LED modules enables the space to present a realistic lighting render whilst offering a consistent energy consumption over time.

XOB

XOB provides the best colour rendering, unmatched colour uniformity and the greatest reliability of any LED array on the market. It is the easiest to design in, presents market-leading performance and narrow beam angles.


- The best colour matching—within 1 x 2 MacAdam ellipses
- CCT range from 2700K to 4000K
- Light output from 345lm — 8300lm
- LES packages range from 4mm to 32.8mm



XIM

Fully integrated, intelligent light module. XIM integrates the light source with the driver, Bluetooth beacons, and a wireless control system in a single unit.

- DALI, 1-10V and new Bluetooth wireless options
- Integrated 48Vdc driver electronics
- Artist Series®, Beauty Series® and Vibrant Series®
- CCT range from 2700K to 4000K
- Light output from 700lm to 3000lm
- 9mm and 19mm LES options

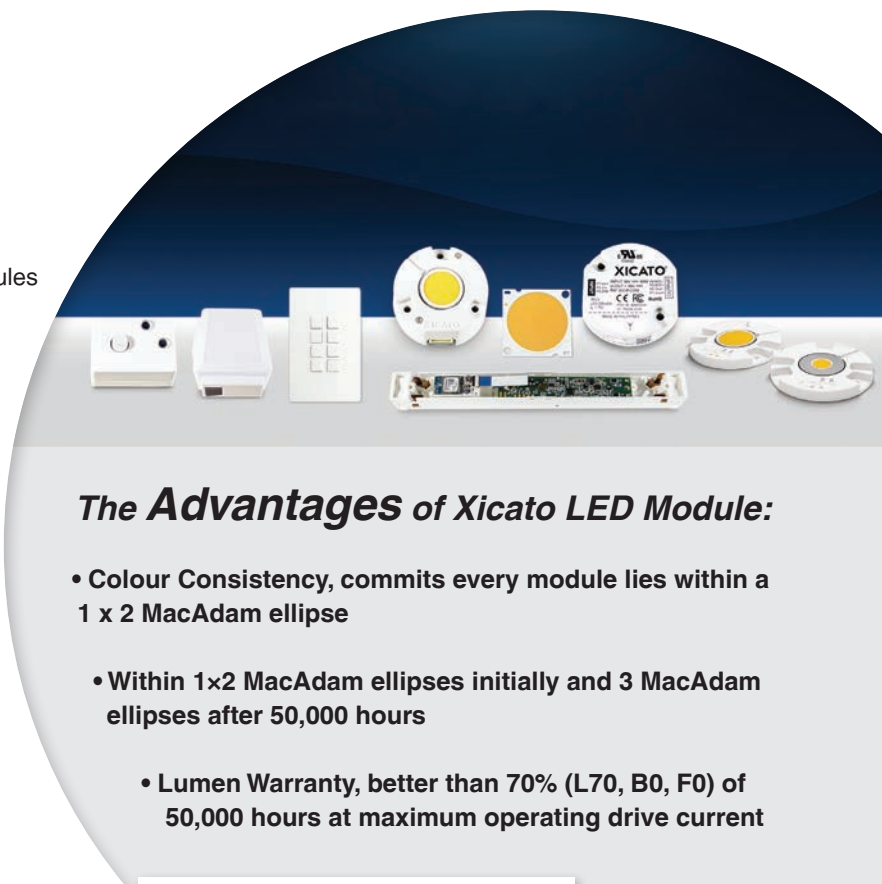

The Advantages of Xicato LED Module:

- **Colour Consistency, commits every module lies within a 1 x 2 MacAdam ellipse**
- **Within 1x2 MacAdam ellipses initially and 3 MacAdam ellipses after 50,000 hours**
- **Lumen Warranty, better than 70% (L70, B0, F0) of 50,000 hours at maximum operating drive current**



XCA

Available in multiple LES, CRI, CCT, and lumen output options, XCA provides a flexible option for luminaire designers and delivers all the colour, consistency and reliability benefits of Xicato's lighting portfolio.

- Standard Series, Artist Series®, Beauty Series® and Vibrant Series®
- CCT range from 2700K to 4000K
- Light output from 700lm to 5000lm
- LES packages range from 9mm to 19mm







Full Spectrum

Full Spectrum LED

Full spectrum LED lighting is designed to replicate natural daylight and has numerous benefits. It can improve human health, enhance color perception, and promote plant growth. Full spectrum lights are often used to supplement natural daylight, helping you feel better, see better, and grow better.

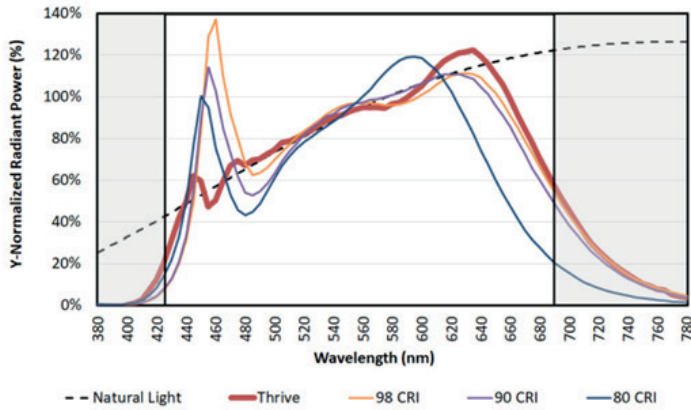

The spectrum of full spectrum LED lamps simulates sunlight and can be adjusted to match the light intensity and color temperature of different times of the day and seasons. This allows them to cater to the growth patterns of organisms.

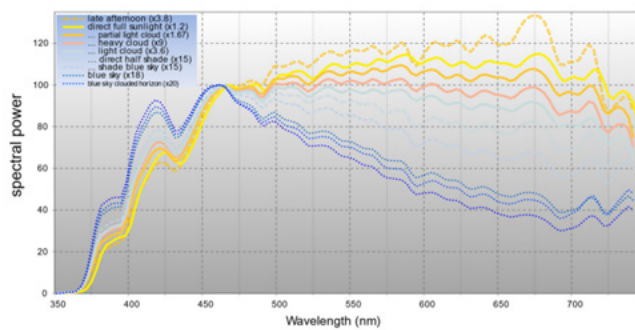

The changing spectral power distribution of sunlight at various times of day and weather conditions. (Image credit: Txbangert under Creative Commons 4.0 license.)

How does full spectrum LED lighting affect sleep?


Full spectrum LED lighting can have a significant impact on sleep quality. Light plays a central role in regulating the body's internal clock, known as the circadian rhythm, which signals when to be alert and when to rest. Exposure to natural light helps keep the circadian rhythm synchronized with sunrise and sunset, promoting wakefulness during the day and sleep at night. However, artificial light sources, including full spectrum LED lights, can disrupt this natural rhythm.

The production of melatonin, an essential sleep-promoting hormone, is closely tied to light exposure. In response to darkness, the pineal gland in the brain initiates melatonin production, which promotes drowsiness and facilitates sleep. Conversely, exposure to light, especially blue light emitted by LEDs, can suppress melatonin secretion and interfere with sleep. This can negatively affect your ability to fall asleep, remain asleep, and sleep for an extended period of time.

On the other hand, full spectrum light therapy has been found to have positive effects on sleep. Researchers have observed that full spectrum light therapy improves


morning alertness, decreases the need for daytime sleep, increases sleep time during the night, and enhances overall sleep duration. These benefits contribute to a longer and deeper night's rest.

In summary, while exposure to natural light is beneficial for maintaining a healthy sleep-wake cycle, excessive or poorly timed artificial light exposure can disrupt circadian rhythms and melatonin production. However, full spectrum light therapy has shown promising results in improving sleep quality.

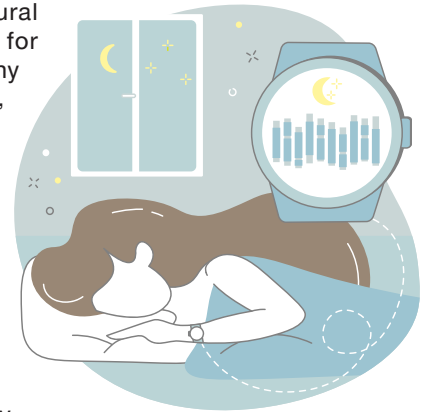

Non-Image Forming Brain Pathways

Blue light penetrates our eyes and signals a specific set of photoreceptors present in the retinal epithelium, called ipRGCs (intrinsically photosensitive Retinal Ganglion Cells). They are one of three types of photoreceptors in the retina, along with rods and cones. See below figure. Rods and cones are the main image forming receptors.

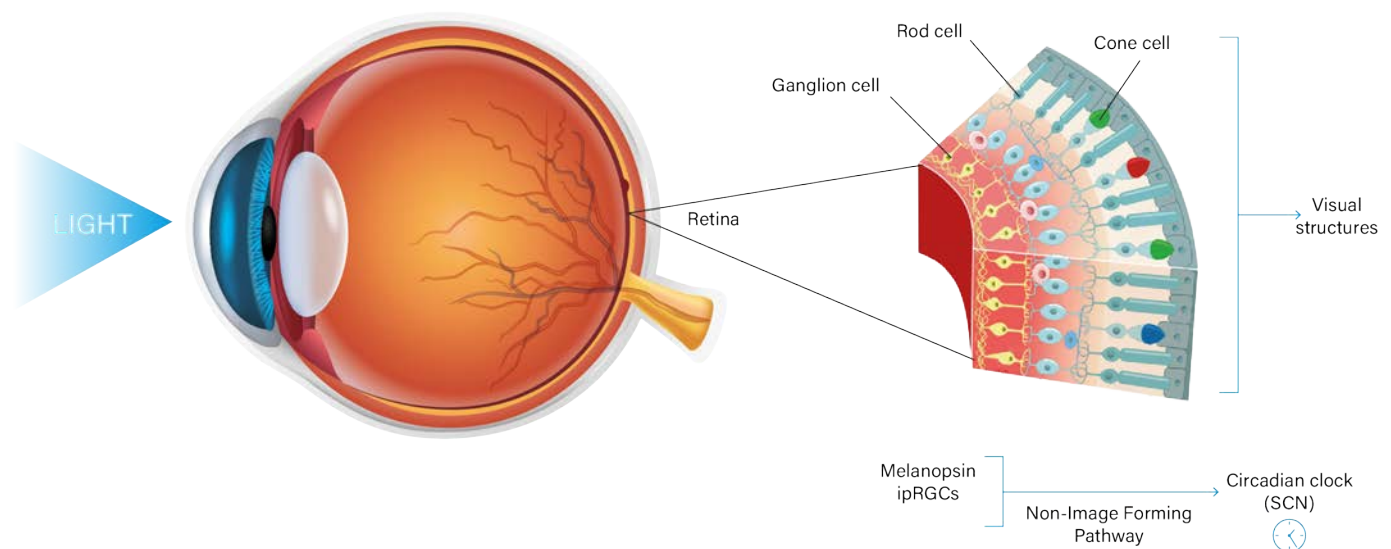

CIC Green




The Construction Industry Council (CIC) and the Hong Kong Green Building Council (HKGBC) are the authoritative organisations leading the construction and green building industries in Hong Kong. With their strong backings, CIC Green Product Certification will be developed as the primary certification scheme serving the local building and construction industry. Certification schemes assessing sustainable building and construction materials / products are not uncommon but they generally lack clear indications to differentiate the eco standards and hence do not help in the promotion and development of sustainable materials and products. Certification schemes also often focus relatively narrowly on certain aspects. CIC Green Product Certification is a comprehensive approach which evaluates multiple aspects such as carbon footprint, greenhouse gases emission, human toxicity, resource consumption, ecosystem impact etc. It provides a transparent platform whereby all stakeholders are informed on the sustainable criteria. The platform will stimulate the industry to procure greener materials and products. Suppliers will then be encouraged to take greener and more

sustainable steps in their manufacturing processes. By creating a healthy competition, the industry will benefit and result in a far more greener built environment.

About the Certification

Building and construction materials and products produce varying impacts on the environment throughout the different stages of the life cycle of buildings. CIC Green Product Certification currently comprises 28 categories catered for thorough evaluation of such environmental impacts. Climate change has become a global threat with worrying consequences for many countries. Among various economic sectors, the construction industry consumes 40% of materials entering the global economy and generates significant amounts of greenhouse gases (GHGs) - the main cause of climate change. The embodied carbon of construction materials used can contribute up to 50% of a building's lifetime carbon footprint. It is thus highly desirable to minimise the GHG emissions through the prudent selection of low carbon construction products.

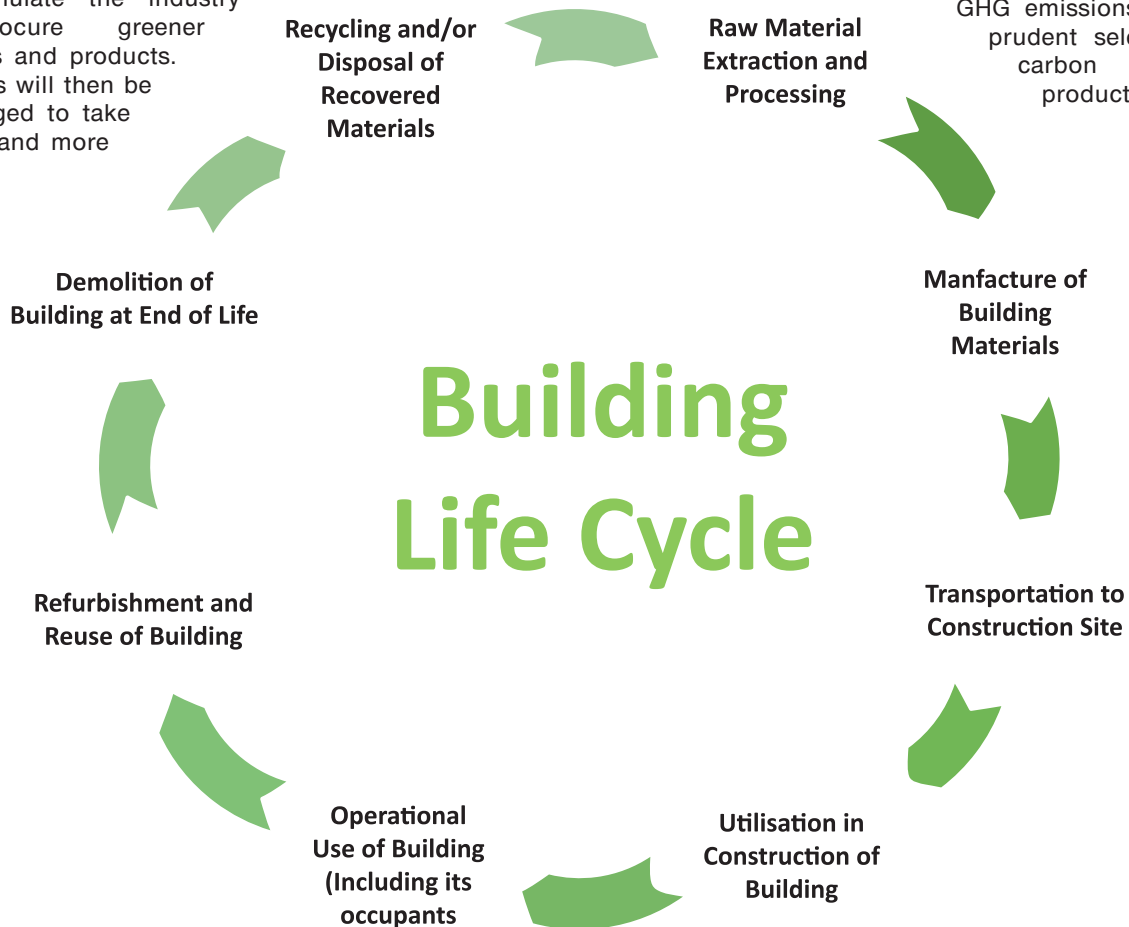



Platinum	Gold	Silver	Bronze	Green
				
CIC GREEN PRODUCT CERTIFICATION	CIC GREEN PRODUCT CERTIFICATION	CIC GREEN PRODUCT CERTIFICATION	CIC GREEN PRODUCT CERTIFICATION	CIC GREEN PRODUCT CERTIFICATION

Incentive of using CIC product
(Up to Sep 2023)

1. BEAM Plus New Buildings V2.0 – Materials & Waste MW9 – Use of Certified Green Products

1 credit for having at least 5% certified green products in one (1) of the listed categories (outside surface works, building façade and structures, interior non-structural components, and building services components).

2 credits for having at least 5% certified green products in two (2) of the listed categories.

1 additional BONUS credit for having at least 5% of certified green products under Construction Industry Council (CIC) Green Product Certification.

2 additional BONUS credits for having at least 25% of certified green products under CIC Green Product Certification.

2. BEAM Plus Existing Buildings V2.0 Comprehensive Scheme - Materials and Waste Aspects (MWA) 2 - Use of Certified Green Products

1 Bonus credit of having 5% of the sustainable products in any one of the product categories as specified in CIC Green Product Certification.

2 Bonus credits for having 5% of certified sustainable products for at least 3 product categories (each category should have at least 5%) as specified in CIC Green Product Certification.

(*The percentage calculation can be in mass, volume, quantity, area or dollar's value. All items including existing and newly purchased items shall be included in the calculation.)

3. BEAM Plus Existing Buildings V2.0 Selective Scheme - Materials and Waste Aspects (MWA) 2 – Materials Purchasing Practices

Maximum 5 credits for purchasing environmentally friendly product during refurbishment including product certified under CIC Green Product Certification.

4. Green Item Subsidy (GIS) of Urban Renewal Authority

CIC Green Product Certification has been accepted by URA on the Green Item Subsidy (GIS) under the Common Area Repair Works Subsidy covered by the Integrated Building Maintenance Assistance Scheme. The maximum amount of GIS is HK\$1,500 per property unit subject to a cap of HK\$600,000 per Owners' Corporation.



Product Category

- Recessed Downlight General Lighting
- FreePlus Module
- Recessed Downlight Accent Lighting
- Surface Mounted Downlight
- Tracklight
- Magnetic Track
- Troffer & Profile System
- MR16 LED Retrofit
- LED Strip & Linear Profile

IP

IP

C/C


Green

Tunable

White


NEW

New Item



Master

- p.26 | Recessed Downlight General Lighting
- p.134 | MR16 LED Retrofit



TODO

- p.27 | Recessed Downlight General Lighting




Planar

- p.28 | Recessed Downlight General Lighting




Hydro LED Sq

- p.32 | Recessed Downlight General Lighting




TINY Sq

- p.33 | Recessed Downlight General Lighting




FreePlus XOB Module

- p.38 | FreePlus Module




FreePlus Tunable White COB Module

- p.42 | FreePlus Module




Space

- p.43 | FreePlus Module
- p.142 | MR16 LED Retrofit




Glee

- p.44 | FreePlus Module
- p.64 | Recessed Downlight Accent Lighting
- p.137 | MR16 LED Retrofit



Pin Slot

- p.48 | FreePlus Module
- p.141 | MR16 LED Retrofit




Pin Hole Sq

- p.49 | FreePlus Module
- p.147 | MR16 LED Retrofit




Renia

- p.50 | FreePlus Module
- p.144 | MR16 LED Retrofit




Multi Super Mini Trimless

- p.54 | FreePlus Module
- p.151 | MR16 LED Retrofit



CHESS

- p.60 | Recessed Downlight Accent Lighting




Multi Cage

- p.61 | Recessed Downlight Accent Lighting
- p.135 | MR16 LED Retrofit

LED Collection

/ Index



Exxi
● p.29 | Recessed Downlight
General Lighting




Hydro LED Midi / Maxi
● p.30 | Recessed Downlight
General Lighting




Hydro LED Mini
● p.31 | Recessed Downlight
General Lighting




**FreePlus
Narrow Spot
XOB Module**
● p.39 | FreePlus Module




**FreePlus
COB Module**
● p.40 | FreePlus Module




**FreePlus
Narrow Spot
COB Module**
● p.41 | FreePlus Module



Domi/ Pomi
● p.45 | FreePlus Module




Somi
● p.46 | FreePlus Module




Pin Hole
● p.47 | FreePlus Module
● p.140 | MR16 LED Retrofit




Mini Trim
● p.51 | FreePlus Module
● p.145 | MR16 LED Retrofit




Mini Trim Sq
● p.52 | FreePlus Module
● p.146 | MR16 LED Retrofit



Multi Super Mini
● p.53 | FreePlus Module
● p.150 | MR16 LED Retrofit



Atec XOB
● p.62 | Recessed Downlight
Accent Lighting



Atec COB
● p.63 | Recessed Downlight
Accent Lighting



Glee Wallwasher
● p.65 | Recessed Downlight
Accent Lighting
● p.138 | MR16 LED Retrofit

Product Category

- Recessed Downlight General Lighting
- FreePlus Module
- Recessed Downlight Accent Lighting
- Surface Mounted Downlight
- Tracklight
- Magnetic Track
- Troffer & Profile System
- MR16 LED Retrofit
- LED Strip & Linear Profile



IP



CIC
Green



Tunable
White




New Item



Glee Spot

- p.66 | Recessed Downlight Accent Lighting
- p.139 | MR16 LED Retrofit



Mini Glee

- p.67 | Recessed Downlight Accent Lighting



Mini Glee Spot

- p.68 | Recessed Downlight Accent Lighting




LED EYE

- p.72 | Recessed Downlight Accent Lighting




XITO

- p.73 | Recessed Downlight Accent Lighting




B.Spot

- p.74 | Recessed Downlight Accent Lighting




Multi Mini Xito Trimless

- p.78 | Recessed Downlight Accent Lighting




Multi Mini Spot COB

- p.79 | Recessed Downlight Accent Lighting




Multi Mini Spot COB Trimless

- p.80 | Recessed Downlight Accent Lighting



Club COB

- p.89 | Surface Mounted Downlight



Multi Box Lite COB

- p.90 | Surface Mounted Downlight



Multi Box Mini XOB AT

- p.91 | Surface Mounted Downlight



Tracbox COB IB

- p.100 | Tracklight



Mini Armbox

- p.101 | Tracklight




Mini IB

- p.102 | Tracklight


LED Collection

/ Index




Slim

● p.69 | Recessed Downlight
Accent Lighting



Slim HP

● p.70 | Recessed Downlight
Accent Lighting




Pin Hole Mini

● p.71 | Recessed Downlight
Accent Lighting




TINY COB

● p.75 | Recessed Downlight
Accent Lighting




Gones

● p.76 | Recessed Downlight
Accent Lighting




Multi Mini Xito

● p.77 | Recessed Downlight
Accent Lighting




Multi Mini COB AT

● p.81 | Recessed Downlight
Accent Lighting



Multi Mini COB Trimless AT

● p.82 | Recessed Downlight
Accent Lighting



Club

● p.88 | Surface Mounted
Downlight




Multi Box Mini COB AT

● p.92 | Surface Mounted
Downlight



Glek IB

● p.98 | Tracklight




Armbox IB

● p.99 | Tracklight




Armbox MT

● p.106 | Magnetic Track



Glek MT

● p.107 | Magnetic Track



Mini Glek MT

● p.108 | Magnetic Track

Product Category

- Recessed Downlight General Lighting
- FreePlus Module
- Recessed Downlight Accent Lighting
- Surface Mounted Downlight
- Tracklight
- Magnetic Track
- Troffer & Profile System
- MR16 LED Retrofit
- LED Strip & Linear Profile

IP

IP



CIC

Green



Tunable

White

NEW

New Item



Magnetic Grille

● p.109 | Magnetic Track




Magnetic Grille Adjustable

● p.110 | Magnetic Track



Magnetic Linear

● p.111 | Magnetic Track



DIP Tunable White (Anti Glare Microfilm with Air Slot Version)

● p.121 | Troffer &
Profile System



DIP (Diffuser Version)

● p.122 | Troffer &
Profile System



DIP (Diffuser with Air Slot Version)

● p.123 | Troffer &
Profile System



DIP (Metal Mesh Hole with Air Slot Version)

● p.127 | Troffer &
Profile System




S-Extal G3

● p.128 | Troffer &
Profile System




B-Extal

● p.129 | Troffer &
Profile System




Atec

● p.143 | MR16 LED Retrofit



Multi Mini AT

● p.148 | MR16 LED Retrofit



Multi Mini Trimless AT

● p.149 | MR16 LED Retrofit

LED Collection

/ Index



Line 40

● p.118 | Troffer & Profile System



Line 60

● p.118 | Troffer & Profile System



Line 80

● p.120 | Troffer & Profile System



DIP

(Anti Glare Microfilm Version)

● p.124 | Troffer & Profile System



DIP

(Anti Glare Microfilm with Air Slot Version)

● p.125 | Troffer & Profile System



DIP

(Metal Mesh Hole Version)


● p.126 | Troffer & Profile System



B-Extal

Tunable White

● p.130 | Troffer & Profile System



Multi Cage AT

● p.135 | MR16 LED Retrofit



Tracfit

● p.136 | MR16 LED Retrofit



Cybox Mini

● p.152 | MR16 LED Retrofit



Multi Box Mini AT

● p.153 | MR16 LED Retrofit

Product Category

- Recessed Downlight General Lighting
- FreePlus Module
- Recessed Downlight Accent Lighting
- Surface Mounted Downlight
- Tracklight
- Magnetic Track
- Troffer & Profile System
- MR16 LED Retrofit
- LED Strip & Linear Profile

IP

C/C
Green

Tunable
White

NEW
New Item



SurfWash

● p.160 | LED Strip & Linear Profile



P-Bar G3

● p.162 | LED Strip & Linear Profile



P-Bar Lite G3

● p.163 | LED Strip & Linear Profile



LEDStrip Stick Mini

● p.170 | LED Strip & Linear Profile




LEDStrip Corner Mini

● p.172 | LED Strip & Linear Profile



Neon Strip 1010

● p.174 | LED Strip & Linear Profile



LEDStrip HE

● p.180 | LED Strip & Linear Profile




LEDStrip Mini

● p.182 | LED Strip & Linear Profile



LEDStrip Duo

● p.184 | LED Strip & Linear Profile



RGB LED Strip

● p.192 | LED Strip & Linear Profile



RGBW LED Strip

● p.194 | LED Strip & Linear Profile



LEDStrip S Pro

● p.196 | LED Strip & Linear Profile



LEDStrip N Stick

● p.204 | LED Strip & Linear Profile



LEDStrip Pro Corner


● p.206 | LED Strip & Linear Profile

LED Collection

/ Index



LEDStrip Thin
● p.164 | LED Strip & Linear Profile



LEDStrip Unit
● p.166 | LED Strip & Linear Profile




LEDStrip COB
● p.168 | LED Strip & Linear Profile



Neon Strip 1220
● p.175 | LED Strip & Linear Profile



Neon Strip 1616
● p.176 | LED Strip & Linear Profile




LEDStrip
● p.178 | LED Strip & Linear Profile



CC LED Strip
● p.186 | LED Strip & Linear Profile



LED Vertical Strip
● p.188 | LED Strip & Linear Profile



LEDStrip Dual
● p.190 | LED Strip & Linear Profile



LEDStrip Pro
● p.198 | LED Strip & Linear Profile



LEDStrip Stick
● p.200 | LED Strip & Linear Profile



LEDStrip L Pro
● p.202 | LED Strip & Linear Profile




UMBRELLA DRYER 雨傘除水器

Place the umbrella inside the dryer and shake it 3 to 5 times
請將雨傘放入除水器內並左右搖動三至五次




Recessed Downlight - General Lighting

/ Index



Master



TODO



Planar




Exxi




Hydro LED Midi /
Maxi



Hydro LED Mini



Hydro LED Sq



TINY Sq



Insider Focal

Exxi



LED Module Replaceable System


Exxi is designed to provide a perfect glare control whilst providing a wide range of beam angle options, it adds an extra layer of ambient lighting to any retail or hospitality spaces.

The improved version of Exxi recessed downlight is now equipped with Xicato LED chips, supporting the luminaire's performance with its industry leading colour consistency and advance lighting specification.



Master

- Recessed downlight for LED module
 - Beam angle available in 15°, 24°, 36°
 - Aluminium trim available in 2 colours options
 - Tilting and rotation allowed
 - Polycarbonate reflector with 2 colours options
 - Separate order of remote LED driver available upon request
- * CIC version only available on CRI 90



NEW




Adjustable Version

MX 7501 - G7 - [] - [] - [] - []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	82	White Trim & Dark Chrome Reflector
9	90	30	3000K	24	24°	84	White Trim & Chrome Reflector
		35	3500K	36	36°	12	Black Trim & Dark Chrome Reflector
		40	4000K			14	Black Trim & Chrome Reflector

- 10.8W 300mA 1571lm, CRI80 COB LED
- 10.8W 300mA 1279lm, CRI90 COB LED



NEW





Adjustable Trimless Version





MX 7502 [] - G7 - [] - [] - [] - []

Code	Ceiling Height	Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
H	20	8	80	27	2700K	15	15°	82	White Installation Kit & Dark Chrome Reflector
L	12	9	90	30	3000K	24	24°	84	White Installation Kit & Chrome Reflector
				35	3500K	36	36°		
				40	4000K				

- 10.8W 300mA 1571lm, CRI80 COB LED
- 10.8W 300mA 1279lm, CRI90 COB LED

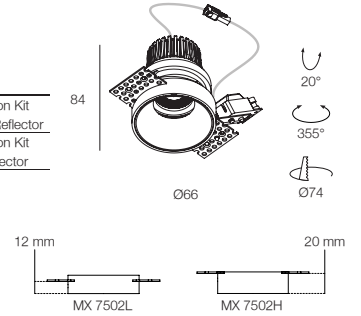

Accessories See Page 156



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-300mA-12-DN(42)	8 - 12W	COB Module	300mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	6 - 15W		300mA, 1-10V Dimmable	250 x 65 x 40	Ø78 require access panel

TODO

- Recessed downlight for COB LED
- Die cast aluminium trim
- Beam angle available in 12°, 22°, 35°
- Separate order of remote LED driver is available upon request




Downlight version

MX 7380 - G6 - [] - [] - 80

Code	CCT	Code	Beam Angle
827	2700K	12	12°
830	3000K	22	22°
835	3500K	35	35°
840	4000K		

17.8W 550mA 2847lm COB LED


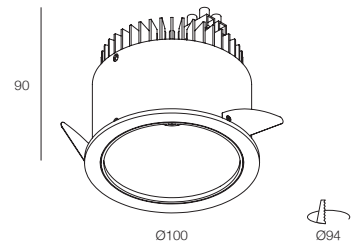


Downlight Version with Cover Glass, IP44

MX 7380C - G6 - [] - [] - 80

Code	CCT	Code	Beam Angle
827	2700K	12	12°
830	3000K	22	22°
835	3500K	35	35°
840	4000K		

17.8W 550mA 2847lm COB LED

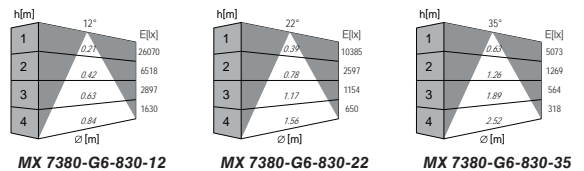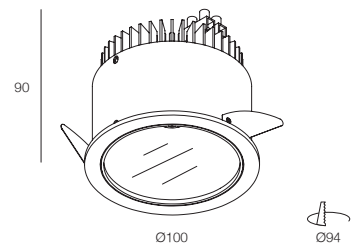

MX 7380-G6-830-12

MX 7380-G6-830-22

MX 7380-G6-830-35

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-550mA-20-DN(40)	14 - 22W	TODO 17.8W	550mA	250 x 65 x 40	Ø78
EC LED-SETmA-M20D-MiAM-TCI(40)	2 - 20W		550mA, 1-10V Dimmable		

Planar

- Recessed downlight for COB LED
- Die cast aluminium trim
- 99.9% high purity aluminium reflector
- High performance polycarbonate diffuser
- Separate order of remote LED driver is available upon request




Planar Mini

MX 5397 - G6 - -

Code	CCT	Code	Reflector Colour
827	2700K	84	Silver
830	3000K	85	Gold
835	3500K		
840	4000K		

12.3W 400mA 2168lm COB LED





Planar MiDi

MX 5399 - G6 - -

Code	CCT	Code	Reflector Colour
827	2700K	84	Silver
830	3000K	85	Gold
835	3500K		
840	4000K		

17.8W 550mA 2847lm COB LED

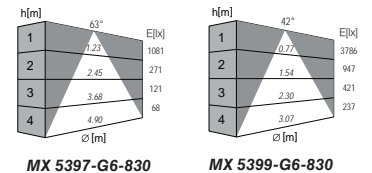

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-400mA-20-DN(40)	10 - 16W	Planar 12.3W	400mA	250 x 65 x 40	Ø78
EC LED-SETmA-M20D-MiAM-TCI(40)	6 - 20W		400mA, 1-10V Dimmable		
EC LED-550mA-20-DN(40)	14 - 22W	Planar 17.8W	550mA		
EC LED-SETmA-M20D-MiAM-TCI(40)	2 - 20W		550mA, 1-10V Dimmable		

Exxi

- Recessed downlight for LED Module
- Die cast aluminium trim
- Polycarbonate reflector in silver vacuum plating
- Separate order of remote LED driver is available upon request



Standard Series

MX 7376 - G6 - [] - 52 - 84

Code	CRI	Code	CCT
8	80	27	2700K
9	90	30	3000K
		35	3500K
		40	4000K



- 23.2W 700mA 4367lm, CRI80 COB LED
- 23.2W 700mA 3545lm, CRI90 COB LED

Full Spectrum Series

MX 7376 - G6 - F [] - 52 - 84

Code	CCT
27	2700K
30	3000K
35	3500K
40	4000K

- 23.8W 700mA 2942lm, CRI95 COB LED



MX 7376 - 65 - F40 - 52

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension (mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-SETmA-M40-PF-TCI(40)	6 - 40W	EXXI COB 23.2W, 23.8W	700mA	250 x 65 x 40	Ø78
EC LED-SETmA-M40D-MW(40)	2 - 40W		700mA, 1-10V Dimmable	250 x 65 x 40	Ø78

Hydro LED Midi / Maxi

- Recessed downlight for LED Module
- White die cast aluminium trim
- 99.9% high purity aluminium reflector
- High performance polycarbonate diffuser
- Separate order of remote LED driver is available upon request
- High output version on request




Hydro LED Midi

MX 7352 - G5 - □□□□ - □□

Code	CCT	Code	Reflector Colour
827	2700K	84	Silver
830	3000K	86	Sandblasted Silver
835	3500K		
840	4000K		

12.8W 350mA 2128lm SMD LED


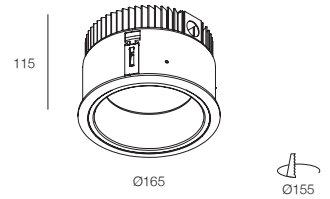


Hydro LED Maxi

MX 7366 - G5 - □□□□ - □□

Code	CCT	Code	Reflector Colour
827	2700K	84	Silver
830	3000K	86	Sandblasted Silver
835	3500K		
840	4000K		

21.7W 700mA 3631lm SMD LED

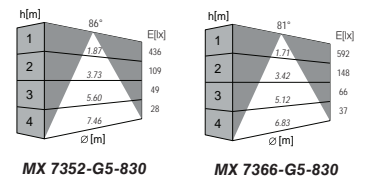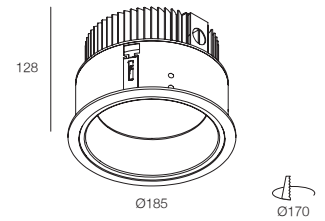

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension (mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-350mA-12-DN(42)	9 - 14W	Hydro LED 12.8W	350mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	6 - 17W		350mA, 1-10V Dimmable	250 x 65 x 40	Ø78
EC LED-700mA-30-DN(40)	18 - 29W	Hydro LED 21.7W	700mA	250 x 65 x 40	Ø78
EC LED-SETmA-M32D-DJU-TCI(13)	2 - 32W		700mA, 1-10V Dimmable	180 x 75 x 44	Ø84

Hydro LED Mini



- Recessed downlight for LED Module
- White die cast aluminium trim
- 99.9% high purity aluminium reflector
- High performance polycarbonate diffuser
- Separate order of remote LED driver is available upon request
- High output version on request



MX 7350 - G5 - -

Code	CCT	Code	Reflector Colour
827	2700K	84	Silver
830	3000K	86	Sandblasted Silver
835	3500K		
840	4000K		

10.6W 350mA 1730lm SMD LED



MX 7350-G5-830

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-350mA-12-DN(42)	9 - 14W	HydroLED Mini 10.6W	350mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	6 - 17W		350mA, 1-10V Dimmable	250 x 65 x 40	Ø78

Hydro LED Sq

- Recessed downlight for LED Module
- Die cast aluminium trim
- 99.9% high purity aluminium reflector
- Separate order of remote LED driver is available upon request
- High output version on request




Downlight Version, Visual Comfort

MX 7395 - G5 - -

Code	CCT	Code	Reflector Colour
827	2700K	84	Silver
830	3000K	86	Sandblasted Silver
835	3500K		
840	4000K		

11.8W 350mA 2130lm SMD LED

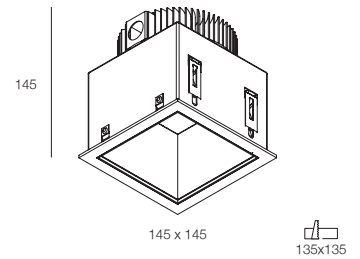


Downlight version

MX 7396 - G5 - -

Code	CCT	Code	Reflector Colour
827	2700K	84	Silver
830	3000K	86	Sandblasted Silver
835	3500K		
840	4000K		

11.8W 350mA 2130lm SMD LED





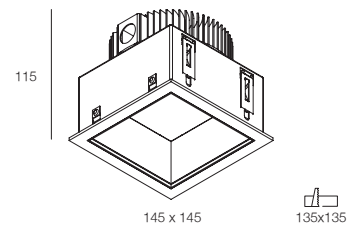


Wallwasher Version

MX 7397 - G5 - -

Code	CCT	Code	Reflector Colour
827	2700K	84	Silver
830	3000K	86	Sandblasted Silver
835	3500K		
840	4000K		

11.8W 350mA 2130lm SMD LED

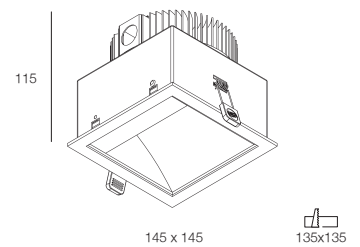


LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-350mA-12-DN(42)	9 - 14W	Hydro LED Sq 11.8W	350mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	6 - 17W		350mA, 1-10V Dimmable	250 x 65 x 40	Ø78

TINY Sq

- Recessed downlight for COB LED
- Die cast aluminium trim
- 99.9% high purity aluminium reflector
- High performance polycarbonate diffuser
- Separate order of remote LED driver is available upon request
- IP55 Version with clear tempered glass diffuser




Standard Version

MX 7319 - G6 - □□□ - □□□

Code	CRI	Code	CCT	Code	Colour
8	80	27	2700K	84	White Trim & Silver Reflector
9	90	30	3000K	86	White Trim & Matt Silver Reflector
		35	3500/k		
		40	4000K		

- 12.2W 350mA, 1995lm CRI80 COB
- 12.2W 350mA, 1620lm CRI90 COB






IP55 version

MX 7319C - G6 - □□□ - □□□

Code	CRI	Code	CCT	Code	Colour
8	80	27	2700K	84	White Trim & Silver Reflector
9	90	30	3000K	86	White Trim & Matt Silver Reflector
		35	3500/k		
		40	4000K		

- 12.2W 350mA, 1995lm CRI80 COB
- 12.2W 350mA, 1620lm CRI90 COB



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-350mA-12-DN(42)	9 - 14W	TINY Sq 12.2W	350mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	6 - 17W		350mA, 1-10V Dimmable	250 x 65 x 40	Ø78



FreePlus Module

/ Index



38

FreePlus
XOB Module



39

FreePlus
Narrow Spot
XOB Module



40

FreePlus
COB Module



41

FreePlus
Narrow Spot
COB Module



42

FreePlus
Tunable White
COB Module



43

Space



44

Glee



45

Domi/ Pomi



46

Somi



47

Pin Hole



48

Pin Slot



49

Pin Hole Sq



50

Renia



51

Mini Trim



52

Mini Trim Sq



53

Multi Super Mini



54

Multi Super Mini
Trimless



Insider Focal

FreePlus

LED Module Replaceable System

FreePlus LED module is compatible with 13 series in the Milux Collection. The FreePlus modules also offer a wide range of options on CCT, CRI, LED Technology, Beam Angle and Efficacy.

The FreePlus LED module is a complete solution to any project type that needs to satisfy a wide range of parameters, whilst providing flexibility to replace the LED module for maintenance.

Pin Hole

Glare Controlled Downlight

Designed with excellent glare control in mind, Pin Hole is equipped with a deep-set reflector and offers a wide range of outputs, colour rendering options, trim shapes, finishing and accessories.

The Pin Hole range allows a maximum of 30° tilting angle movement. Combined with the glare-free surface with precise optics, the design merges seamlessly into the interior thus creating an elegant lighting environment. Suitable for restaurants, museums, galleries and fashion retailers which demands for excellent glare control.



Mini Trim

Ultra-Slim Design

The Mini Trim range is available in both round and square recess option, offering energy-efficient, precision lighting for accent or task applications.

The luminaires emphasises an ultra-thin and a sleek design, delivering a compact aesthetic to any interiors.

FreePlus XOB Module

- Premium LED module Powered by XiCato**
- High Colour Consistency, 1x2 MacAdam Ellipses
 - 3 Types of Light: CRI90, CRI95, Vibrant Series
 - 4 CCT Options: 2700K, 3000K, 3500K, 4000K
 - Projected Life Time 50K Hours L70, B0, F0





XOB Module CRI90


..... - **09OB90** - **G7** - - ...

Code	CCT	Code	Beam Angle
27	2700K	16	16°
30	3000K	24	24°
35	3500K	36	36°
40	4000K		


8.2W 240mA 1059lm, CRI90



XOB Module CRI90 16°



XOB Module CRI90 24°



XOB Module CRI90 36°

CRI 95+ XOB Module CRI95

..... - **09OB95** - **G7** - - ...

Code	CCT	Code	Beam Angle
27	2700K	16	16°
30	3000K	24	24°
35	3500K	36	36°
40	4000K		



8.2W 240mA 979lm, CRI95

CRI 95+ XOB Module Vibrant V9


..... - **09OBV9530 - G6** - - ...

Code	Beam Angle
16	16°
24	24°
36	36°


8.2W 240mA 1059lm, CRI90



XOB Module CRI95/ V9 16°



XOB Module CRI95/ V9 24°



XOB Module CRI95/ V9 36°

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-240mA-12-DN(42)	6 - 10W	XOB Module 8.2W	240mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	5 - 13W	XOB Module 8.4W	250mA, 1-10V Dimmable	250 x 65 x 40	Ø78

FreePlus Narrow Spot XOB Module

Perfect Field Angle LED module Powered by XICATO™

- High Colour Consistency, 1x2 MacAdam Ellipses
- 3 Types of Light: CRI 90, CRI 95, Vibrant Series
- Narrow Spot with 12° beam angle
- Field/ Beam Ratio 2.0
- 4 CCT Options: 2700K, 3000K, 3500K, 4000K
- Projected Life Time 50K Hours L70, B0, F0





Narrow Spot XOB Module CRI90

..... - **06OB90** - **G7 - 12** - ...

Code	CCT
27	2700K
30	3000K
35	3500K
40	4000K

7.6W 240mA 846lm, CRI90



XOB Narrow Spot CRI90



CRI 95+ XOB Module CRI95
..... - **09OB90** - **G7 - 11** - ...

Code	CCT
27	2700K
30	3000K
35	3500K
40	4000K

7.2W 240mA 774lm, CRI95

CRI 95+ XOB Module Vibrant V9
..... - **09OBV9530** - **G6 - 11** - ...

GAI 104 7.2W 240mA 772lm, CRI95



XOB Narrow Spot CRI95/ Vibrant V9

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-240mA-12-DN(42)	6 - 10W	Narrow Spot XOB Module 7.2W	240mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	5 - 13W	Narrow Spot XOB Module 7.9W	250mA, 1-10V Dimmable	250 x 65 x 40	Ø78

FreePlus COB Module

LED Module Powered by **bridgelux**

- Full Beam Angle Options: Narrow, Medium, Wide
- 4 CCT Options: 2700K, 3000K, 3500K, 4000K
- SDCM 3 MacAdam Ellipses
- Projected Life Time 50K hours L70





COB Module CRI80


..... - G7 - [] [] - [] []

Code	CCT	Code	Beam Angle
827	2700K	20	20°
830	3000K	30	30°
835	3500K	40	40°
840	4000K		


9.2W 300mA 1641lm, CRI80



COB Module CRI80 20°



COB Module CRI80 30°



COB Module CRI80 40°



CRI 90

COB Module CRI90


..... - G7 - [] [] - [] []

Code	CCT	Code	Beam Angle
927	2700K	20	20°
930	3000K	30	30°
935	3500K	40	40°
940	4000K		


9.2W 300mA 1329lm, CRI90



COB Module CRI90 20°



COB Module CRI90 30°



COB Module CRI90 40°


LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-300mA-12-DN(42)	8 - 12W	COB Module 9.2W	300mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	6 - 15W		300mA, 1-10V Dimmable	250 x 65 x 40	Ø78

FreePlus Narrow Spot COB Module

LED Module Powered by 

- Narrow Spot with 11° beam angle
- Field/ Beam Ratio 1.8
- 4 CCT Options: 2700K, 3000K, 3500K, 4000K
- SDCM 3 MacAdam Ellipses
- Projected Life Time 50K hours L70





Narrow Spot COB Module CRI80

..... - V6G7 - - 11 - ...

Code	CCT
827	2700K
830	3000K
835	3500K
840	4000K

 8.4W 240mA 1282lm, CRI80





Narrow Spot COB Module CRI80

CRI 90 Narrow Spot COB Module CRI90

..... - V6G7 - - 11 - ...

Code	CCT
927	2700K
930	3000K
935	3500K
940	4000K

 8.4W 240mA 1041lm, CRI90



Narrow Spot COB Module CRI90

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-240mA-12-DN(42)	6 - 10W	Narrow Spot COB Module 8.4W	240mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	5 - 13W	Narrow Spot COB Module 8.8W	250mA, 1-10V Dimmable	250 x 65 x 40	Ø78

FreePlus Tunable White COB Module

LED Module Powered by **bridgelux**.

- Full Beam Angle Options: Narrow, Medium Beam
- CCT vary from 2700K to 6500K
- SCDM 3 MacAdam Ellipses
- Projected Life Time 50K hours L70






COB Reflector Module 2700K to 6500K


..... - G7 - TW9 - - ...

Code	Beam Angle
20	20°
30	30°
40	40°


● 9W 500mA 927lm, CRI93

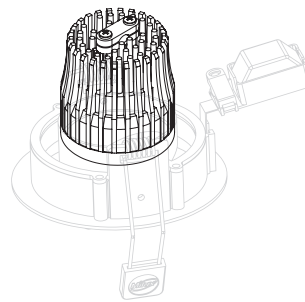

FreePlus Tunable White
CRI93, 3000K 20°



FreePlus Tunable White
CRI93, 3000K 30°





FreePlus Tunable White
CRI93, 3000K 40°

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-SETmA-M20DaTW-LT(40)	5 - 20W	COB Module 9W	500mA, DALI (DT8)	250 x 65 x 40	Ø78

Space




- Recessed downlight for COB LED
- Die cast aluminium trim
- Polycarbonate reflector in vacuum plating
- Separate order of remote LED driver is available




MX 7407 - - [] [] []

**Please refer to P.38-42 for the FreePlus Module Matrix*


Code	Colour
80B	White
10B	Black

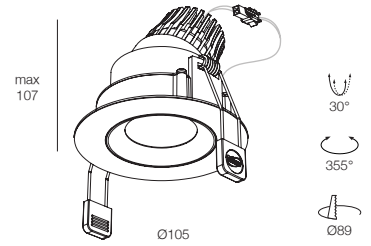

MX 7407-G7-830-20




MX 7407-G7-830-30



MX 7407-G7-830-40

Glee

- Recessed downlight for FreePlus Module
- Die cast aluminium trim
- Polycarbonate secondary optics with various colours options
- Downlight and wallwasher version available
- Separate order of remote LED driver available upon request





Downlight Version





MX 7480 - -

*Please refer to P.38-42 for the FreePlus Module Matrix

Code	Colour
82	White Trim & Black Reflector
84	White Trim & Silver Reflector
86	White Trim & Sandblasted Reflector
89	White Trim & Rose Gold Reflector



Accessories See Page 156






Wallwasher Version

MX 7467 - - **84**

*Please refer to P.38-42 for the FreePlus Module Matrix


*Only for COB 30° and XOB 24° Beam Angle Module



MX 7467-FP-G7-830-30-84

Domi/ Pomi

- Recessed downlight for FreePlus module
- Die cast aluminium trim
- Separate order of remote LED driver available upon request






Domi Version


MX 7450 - -

*Please refer to P.38-42 for the FreePlus Module Matrix


Code	Colour
80	White
10	Black

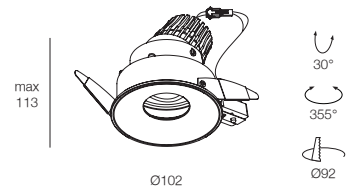

MX 7450-G7-830-20



MX 7450-G7-830-30





MX 7450-G7-830-40

Pomi Square Trim Version


MX 7452 - -

*Please refer to P.38-42 for the FreePlus Module Matrix


Code	Colour
82	White
12	Black



MX 7452-G7-830-20



MX 7452-G7-830-30



MX 7452-G7-830-40

Somi

- Recessed downlight for FreePlus module
- Die cast aluminium trim
- Separate order of remote LED driver available






Somi Replaceable Reflector Version


MX 7451 - - □□

*Please refer to P.38-42 for the FreePlus Module Matrix


Code	Reflector Colour
82	White Trim Black Reflector
84	White Trim Silver Reflector
86	White Trim Sandblasted Silver Reflector
89	White Trim Rose Gold Reflector



MX 7451-G7-830-20





MX 7451-G7-830-30



MX 7451-G7-830-40

Pin Hole

- Recessed downlight for FreePlus module
- Adjustable and fixed version available
- Die cast aluminium body available in 2 colours
- Separate order of remote LED driver available upon request




Adjustable Version

MX 7425 - [] - []

Code	Colour	Code	Colour
-Blank	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

**Please refer to P.38-42 for the FreePlus Module Matrix*

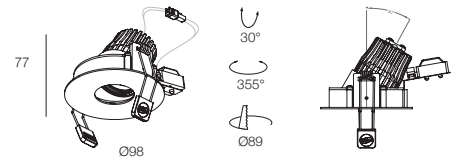


Adjustable Version with Cover Glass, IP55

MX 7425C - [] - []

Code	Colour	Code	Colour
-Blank	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

**Please refer to P.38-42 for the FreePlus Module Matrix*

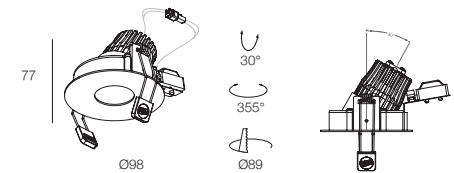


Fixed Version

MX 7426 - [] - []

Code	Colour	Code	Colour
-Blank	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

**Please refer to P.38-42 for the FreePlus Module Matrix*

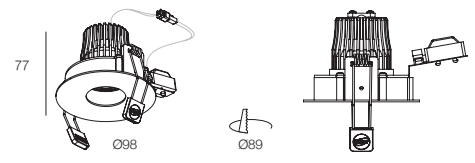


Fixed Version with Cover Glass, IP55





MX 7426C - [] - []

Code	Colour	Code	Colour
-Blank	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

**Please refer to P.38-42 for the FreePlus Module Matrix*

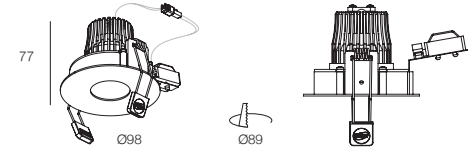

Accessory (*Match with Flush Mount Kit/ Installation Kit Version)

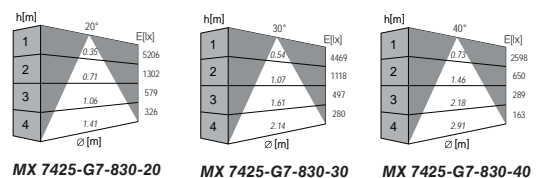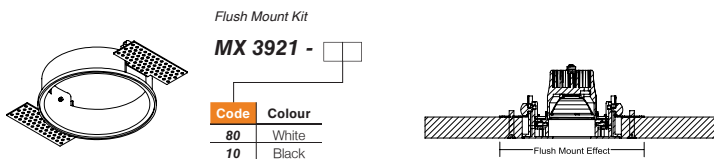


MX 7425-G7-830-20

MX 7425-G7-830-30

MX 7425-G7-830-40

Pin Slot

- Recessed downlight for FreePlus module
- Adjustable version
- Die cast aluminium body available in 2 colours
- Separate order of remote LED driver available upon request




Adjustable Version

MX 7427 - [] - []

Code	Colour	Code	Colour
-Blank	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

**Please refer to P.38-42 for the FreePlus Module Matrix*




Adjustable Version with Cover Glass, IP55

MX 7427C - [] - []

Code	Colour	Code	Colour
-Blank	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

**Please refer to P.38-42 for the FreePlus Module Matrix*

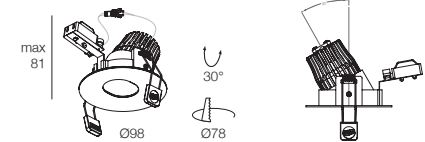


Accessory (*Match with Flush Mount Kit/ Installation Kit Version)

Flush Mount Kit



MX 3921 - []

Code	Colour
80	White
10	Black





Installation Kit

MX 3924 - 10



Accessories See Page 156

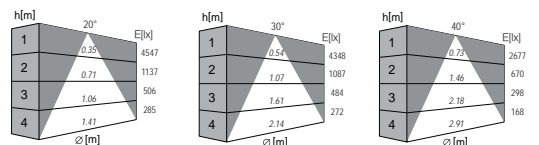


MX 7427-G7-830-20

MX 7427-G7-830-30

MX 7427-G7-830-40

Pin Hole Sq

- Recessed downlight for FreePlus module
- Die cast aluminium body available in 2 colours
- Separate order of remote LED driver available upon request




Adjustable Version

MX 7411

Code	Colour	Code	Colour
-Blank	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

**Please refer to P.38-42 for the FreePlus Module Matrix*

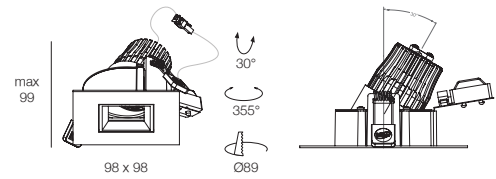


Adjustable Version with Cover Glass, IP55

MX 7411C

Code	Colour	Code	Colour
-Blank	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

**Please refer to P.38-42 for the FreePlus Module Matrix*


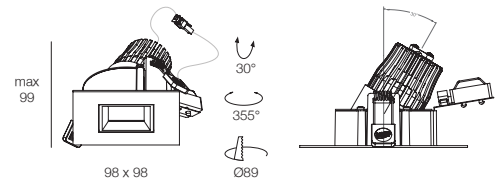


Accessory (*Match with Flush Mount Kit/ Installation Kit Version)

Flush Mount Kit




MX 3923

Code	Colour
80	White
10	Black





Installation Kit


MX 3924 - 10




Accessories See Page 156



MX 7411-G7-830-20




MX 7411-G7-830-30



MX 7411-G7-830-40

Renia

- Recessed downlight for FreePlus module
- Die cast aluminium body available in 2 colours
- Adjustable and fixed version available
- Separate order of remote LED driver available upon request





Fixed Version

MX 7490 - -

*Please refer to P.38-42 for the FreePlus Module Matrix

Code	Colour
80	White
10	Black




Adjustable Version

MX 7491 - -

*Please refer to P.38-42 for the FreePlus Module Matrix

Code	Colour
80	White
10	Black




Accessory



Anti-Glare tube (Black)

MX 5949 - 10


Overall height increase by 20 mm

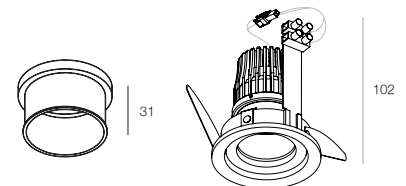

Renia + MX 5949-10

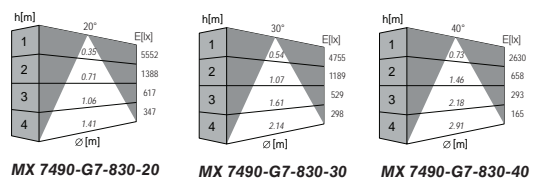


Accessories See Page 156



Mini Trim

- Recessed downlight for FreePlus module
- Die cast aluminium body available in 2 colours
- Adjustable and wallwasher version available
- Separate order of remote LED driver available upon request







Adjustable Version

MX 7463 - -

*Please refer to P.38-42 for the FreePlus Module Matrix

Code	Colour
80	White
10	Black








Wallwasher Version

MX 7478 - -


*Please refer to P.38-42 for the FreePlus Module Matrix

Code	Colour
80	White
10	Black



Mini Trim Sq

- Recessed downlight for FreePlus module
- Polycarbonate reflector
- Die cast aluminium body available in 2 colours
- Adjustable and fixed version available
- Separate order of remote LED driver available upon request







Fixed Version

MX 7460 - -

**Please refer to P.38-42 for the FreePlus Module Matrix*

Code	Colour
80	White
10	Black

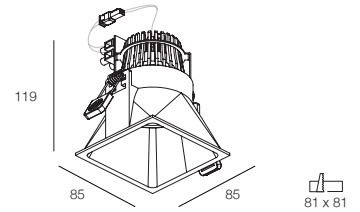

MX 7460-G7-830-20

MX 7460-G7-830-30





MX 7460-G7-830-40

Adjustable Version

MX 7462 - -

**Please refer to P.38-42 for the FreePlus Module Matrix*


Code	Colour
80	White
10	Black

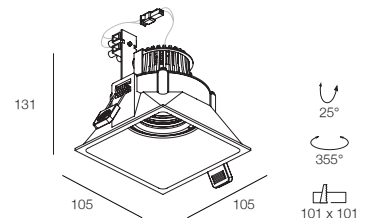


MX 7462-G7-830-20

MX 7462-G7-830-30

MX 7462-G7-830-40



Accessories See Page 156



Multi Super Mini


- Recessed downlight for FreePlus Module
- Metal body available in 2 colours
- Separate order of remote LED driver available upon request



MX 7464S - - □□

**Please refer to P.38-42 for the FreePlus Module Matrix*


Code	Colour
80	White
10	Black



MX 7464D - - □□

**Please refer to P.38-42 for the FreePlus Module Matrix*


Code	Colour
80	White
10	Black



MX 7464T - - □□

**Please refer to P.38-42 for the FreePlus Module Matrix*

Code	Colour
80	White
10	Black

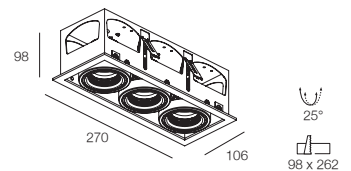



MX 7466 - - □□

**Please refer to P.38-42 for the FreePlus Module Matrix*


Code	Colour
80	White
10	Black




Accessories See Page 156



MX 7464S-G7-830-20



MX 7464S-G7-830-30



MX 7464S-G7-830-40

Multi Super Mini Trimless

- Recessed downlight for FreePlus Module
- Metal body available in 2 colours
- Separate order of remote LED driver available upon request




MX 7465S - -
 Trimless Installation Kit
MX TIK41LS -

**Please refer to P.38-42 for the FreePlus Module Matrix*



Code	Colour	Colour of Installation Kit
00B	Black Body	Black
80W	White Body	White




MX 7465D- -
 Trimless Installation Kit
MX TIK41LD -

**Please refer to P.38-42 for the FreePlus Module Matrix*



Code	Colour	Colour of Installation Kit
00B	Black Body	Black
80W	White Body	White







MX 7465T - -
 Trimless Installation Kit
MX TIK41LT -


**Please refer to P.38-42 for the FreePlus Module Matrix*




Code	Colour	Colour of Installation Kit
00B	Black Body	Black
80W	White Body	White



MX 7465S-G7-830-20



MX 7465S-G7-830-30




MX 7465S-G7-830-40






Recessed Downlight - Accent Lighting

/ Index




60

CHESS




61

Multi Cage




62

Atec XOB




63

Atec COB




64

Glee




65

Glee Wallwasher




66

Glee Spot



67

Mini Glee




68

Mini Glee Spot




69

Slim




70

Slim HP



71

Pin Hole Mini




72

LED EYE




73

XITO




74

B.Spot




75

TINY COB




76

Gones




77

Multi Mini Xito




78

Multi Mini Xito
Trimless




79

Multi Mini Spot
COB




80

Multi Mini Spot
COB Trimless



81

Multi Mini COB AT



82

Multi Mini COB
Trimless AT



Insider Focal

Glee Spot



Magic Tilt Angle for Visual Comfort

The unique “Offset Tilting” technology offers a 25 degree tilting angle away from the central axis for efficient accent lighting applications. By repositioning the lamp source Glee can redirect the beam towards a single point without sacrificing candela level.

GLEE provides the perfect balance between efficacy, light comfort and design, without compromising on the performance and light quality. The reflector is available in 12 colour options for you to create the desired ambience, no matter the application.






Xito

Superior Quality of Light

The Xito is designed to utilize the high specification of the Xicato™ LED module. Xicato™ LEDs exceed the ANSI specifications by maintaining tight colour consistency over the lifespan of the LED module and guarantees an even field of illumination for the most demanding applications.

The new die-cast heat sink design delivers a minimalist aesthetics. Xito is equipped with a PVD Chrome Reflector for high reflectivity and specularity, without compromising on the even light distribution.

Reflector colour options

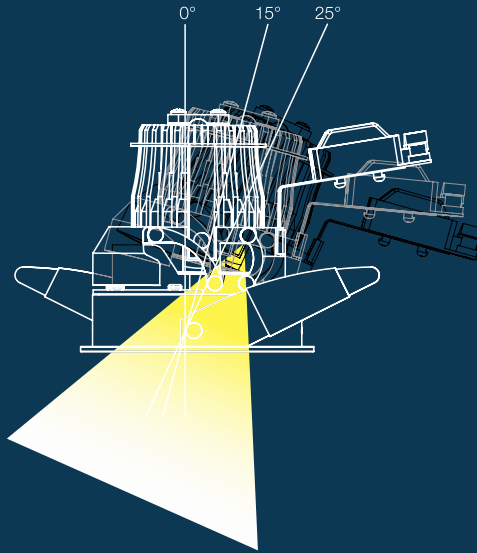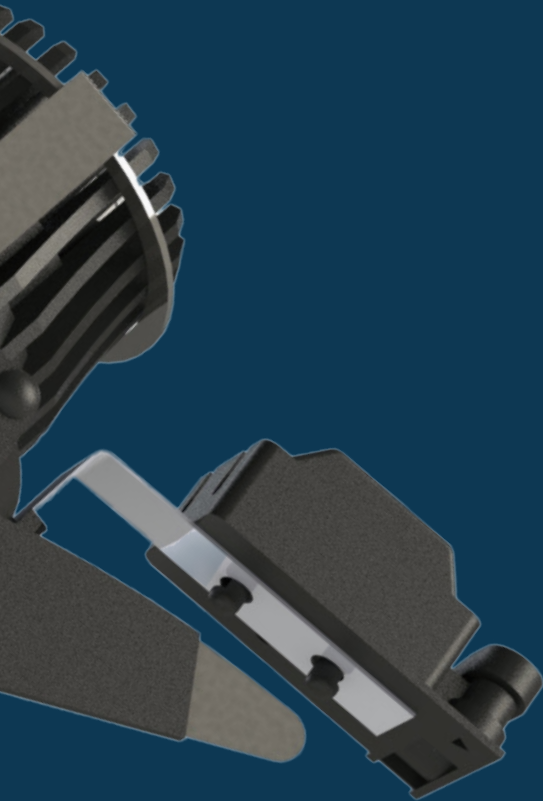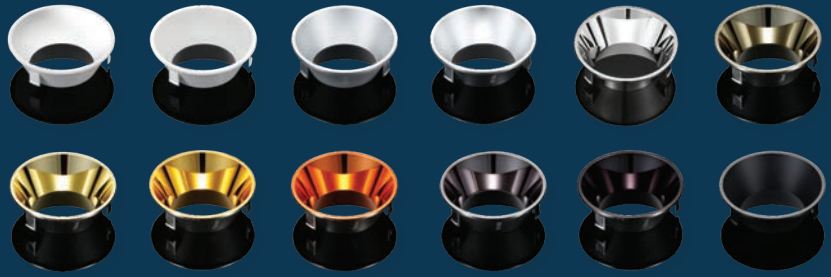

Maximise the effective angle



Slim

Ideal Solution for Hospitality Application

Slim is a compact recessed downlight with a Ø40mm trim. Small-recessed downlight with high output is ideal for tight spaces or prominent hospitality spaces.

This downlight features an innovative approach to thermal management. The integrated heat sink design allows the lamp to be repositioned without compromising the excellent glare control that Slim offers.

CHESS

- Recessed downlight with LED module
- Beam angle available in 15°, 24°, 36°
- Aluminium trim and body available in various 2 colour options
- Adjustable or fixed version options available
- Separate order of remote LED driver available upon request



NEW




Fixed Version

MX 7468 - G7 - [] - [] - [] - []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	20	20°	80B	White Trim & Black Body
9	90	30	3000K	30	30°	80W	White Trim & Body
		35	3500K	40	40°	10B	Black Trim & Body
		40	4000K				

- 6.9W 200mA 1085lm, CRI80 COB LED
- 6.9W 200mA 881lm, CRI90 COB LED

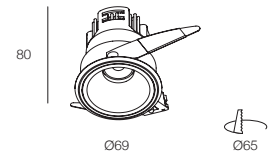

NEW






Adjustable Version

MX 7469 - G6 - [] - [] - [] - []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	20	20°	80B	White Trim & Black Body
9	90	30	3000K	30	30°	80W	White Trim & Body
		35	3500K	40	40°	10B	Black Trim & Body
		40	4000K				

- 6.9W 200mA 1085lm, CRI80 COB LED
- 6.9W 200mA 881lm, CRI90 COB LED

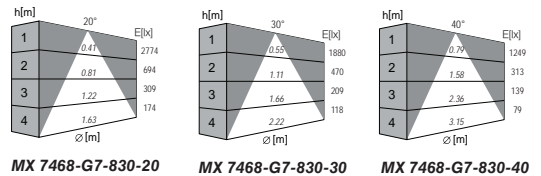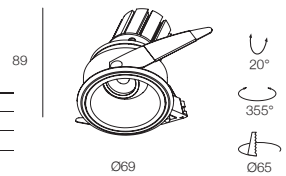

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-200mA-8-ER(42)	5 - 8W	CHESSE 7.1W	200mA	220 x 45 x 30	Ø54
EC LED-SETmA-M10D-AS-LT(40)	2 - 8W		200mA, 1-10V Dimmable	250 x 65 x 40	Ø78 require access panel

Multi Cage

- Recessed downlight for FreePlus Module
- Metal body available in 2 colours
- Separate order of remote LED driver available upon request




NEW



MX 7457S - - □ □ □ □

*Please refer to P.38-42 for the FreePlus Module Matrix

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body





NEW





MX 7457D - - □ □ □ □

*Please refer to P.38-42 for the FreePlus Module Matrix


Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body




Accessories See Page 156



MX 7457S-G7-930-20



MX 7457S-G7-930-30



MX 7457S-G7-930-40

Atec XOB

- Recessed downlight for XOB module
- Polycarbonate reflector in silver vacuum plating
- Beam angle available in 16°, 24° and 36°
- Adjustable and fixed version available
- Separate order of remote LED driver is available upon request




Fixed Version

MX 7622 - 09OB [] [] [] - G6 - [] [] [] []

Code	Series	Code	CCT	Code	Beam Angle	Code	Colour
90	CRI 90	27	2700K	15	15°	80B	White Trim & Black Tube
95	CRI 95	30	3000K	25	25°	80W	White Trim & Tube
		35	3500K	38	38°	10B	Black Trim & Tube
		40	4000K				

- 11.9W, 350mA, 1513lm, CRI90 Xicato XOB LED Module
- 11.9W, 350mA, 1341lm, CRI95 Xicato XOB LED Module



MX 7622 - 09OBV9530 - G6 - [] [] [] - [] [] [] []

Code	Beam Angle	Code	Colour
15	15°	80B	White Trim & Black Tube
25	25°	80W	White Trim & Tube
38	38°	10B	Black Trim & Tube

- 11.9W 350mA, 1347lm, CRI95 Xicato XOB Vibrant V9 LED Module




Adjustable Version

MX 7623 - 09OB [] [] [] - G6 - [] [] [] []

Code	Series	Code	CCT	Code	Beam Angle	Code	Colour
90	CRI 90	27	2700K	15	15°	80B	White Trim & Black Tube
95	CRI 95	30	3000K	25	25°	80W	White Trim & Tube
		35	3500K	38	38°	10B	Black Trim & Tube
		40	4000K				




- 11.9W, 350mA, 1513lm, CRI90 Xicato XOB LED Module
- 11.9W, 350mA, 1341lm, CRI95 Xicato XOB LED Module



MX 7623 - 09OBV9530 - G6 - [] [] [] - [] [] [] []

Code	Beam Angle	Code	Colour
15	15°	80B	White Trim & Black Tube
25	25°	80W	White Trim & Tube
38	38°	10B	Black Trim & Tube

- 11.9W 350mA, 1347lm, CRI95 Xicato XOB Vibrant V9 LED Module

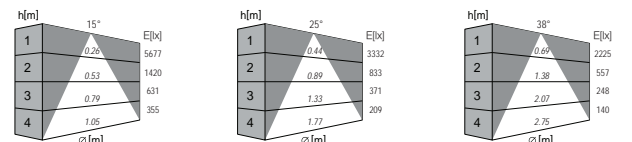

MX 7622-09OB9030-G6-15 MX 7622-09OB9030-G6-25 MX 7622-09OB9030-G6-38

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-350mA-12-DN(42)	9 - 14W	Atec XOB 11.9W	350mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	6 - 17W		350mA, 1-10V Dimmable	250 x 65 x 40	Ø78

Atec COB

- Recessed downlight for COB module
- Polycarbonate reflector in silver vacuum plating
- Beam angle available in 15°, 25°, 38°
- Adjustable and fixed version available
- Separate order of remote LED driver available




Fixed Version

MX 7420 - G6 - [] [] [] - [] [] [] - [] [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80B	White Trim & Black Tube
9	90	30	3000K	25	25°	80W	White Trim & Tube
		35	3500K	38	38°	10B	Black Trim & Tube
		40	4000K				

- 12.3W 400mA 2188lm, CRI80 COB LED
- 12.3W 400mA 1772lm, CRI90 COB LED









Adjustable Version

MX 7421 - G6 - [] [] [] - [] [] [] - [] [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80B	White Trim & Black Tube
9	90	30	3000K	25	25°	80W	White Trim & Tube
		35	3500K	38	38°	10B	Black Trim & Tube
		40	4000K				

- 12.3W 400mA 2188lm, CRI80 COB LED
- 12.3W 400mA 1772lm, CRI90 COB LED



MX 7420-G6-830-15

MX 7420-G6-830-25

MX 7420-G6-830-38

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-400mA-20-DN(40)	10 - 16W	Atec COB 12.3W	400mA	250 x 65 x 40	Ø78
EC LED-SETmA-M20D-MiAM-TCI(40)	6 - 20W		400mA, 1-10V Dimmable		

Glee

- Recessed downlight for LED module
- Beam angle available in 18°, 23°, 36°
- Die cast aluminium trim
- Polycarbonate secondary optics with various colour options
- Adjustable and fixed version available
- Separate order of remote LED driver available upon request
- * CIC version only available on CRI 90




Fixed Version

MX 7488 - G7 - [] [] - [] [] - [] []



Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	18	18°	82	White Trim & Black Reflector
9	90	30	3000K	23	23°	84	White Trim & Silver Reflector
		35	3500K	36	36°	86	White Trim & Sandblasted Reflector
		40	4000K			89	White Trim & Rose Gold Reflector

- 10.9W 350mA 1897lm, CRI80 COB LED
- 10.9W 350mA 1537lm, CRI90 COB LED





Adjustable Version

MX 7475 - G7 - [] [] - [] [] - [] []







Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	18	18°	82	White Trim & Black Reflector
9	90	30	3000K	23	23°	84	White Trim & Silver Reflector
		35	3500K	36	36°	86	White Trim & Sandblasted Reflector
		40	4000K			89	White Trim & Rose Gold Reflector

- 10.9W 350mA 1897lm, CRI80 COB LED
- 10.9W 350mA 1537lm, CRI90 COB LED



Accessories See Page 156



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-350mA-12-DN(42)	9 - 14W	Glee 10.9W	350mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	6 - 17W		350mA, 1-10V Dimmable	250 x 65 x 40	Ø78

Glee Wallwasher



- Die cast aluminium trim
- Polycarbonate wallwasher optics with frosted diffuser
- XOB version available upon request
- Separate order of remote LED driver available upon request



MX 7477 - G7 - - NA - 84

Code	CRI	Code	CCT
8	80	27	2700K
9	90	30	3000K
		35	3500K
		40	4000K

- 10.9W 350mA 1897lm, CRI80 COB LED
- 10.9W 350mA 1537lm, CRI90 COB LED



MX 7477-G7-830

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-350mA-12-DN(42)	9 - 14W	Glee Wallwasher 10.9W	350mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	6 - 17W		350mA, 1-10V Dimmable	250 x 65 x 40	Ø78

Glee Spot

- Die cast aluminium trim
- Offset tilting and adjustable version available
- Polycarbonate secondary optics with various colour options
- Offset tilting and rotation allowed, maximise the effective tilting angle
- Separate order of remote LED driver available upon request







Offset Tilting Version

MX 7476 - G7 - [] [] [] - [] [] [] - [] [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	18	18°	82	White Trim & Black Reflector
9	90	30	3000K	25	25°	84	White Trim & Silver Reflector
		35	3500K	36	36°	86	White Trim & Sandblasted Reflector
		40	4000K			89	White Trim & Rose Gold Reflector

- 8.4W 240mA 1282m, CRI80 COB LED
- 8.4W 240mA 1058lm, CRI90 COB LED







Adjustable Version

MX 7495 - G7 - [] [] [] - [] [] [] - [] [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	18	18°	82	White Trim & Black Reflector
9	90	30	3000K	25	25°	84	White Trim & Silver Reflector
		35	3500K	36	36°	86	White Trim & Sandblasted Reflector
		40	4000K			89	White Trim & Rose Gold Reflector

- 8.4W 240mA 1282m, CRI80 COB LED
- 8.4W 240mA 1058lm, CRI90 COB LED



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-240mA-12-DN(42)	6 - 10W	Glee Spot 8.4W	240mA	220 x 45 x 30	Ø54
EC LED-SETmA-M20D-MiAM-TCI(40)	5 - 13W	Glee Spot 8.8W	250mA, 1-10V Dimmable	250 x 65 x 40	Ø78

Mini Glee

- Die cast aluminium trim
- Fixed and wallwasher version available
- Polycarbonate secondary optics with various colour options
- Separate order of remote LED driver available upon request





Fixed Version

MX 7484 - G7 - - -





Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	18	18°	82	White Trim & Black Reflector
6	90	30	3000K	24	24°	84	White Trim & Silver Reflector
		35	3500K	36	36°	86	White Trim & Sandblasted Reflector
		40	4000K			89	White Trim & Rose Gold Reflector

- 8.4W 240mA 1282lm, CRI80 COB LED
- 8.4W 240mA 1041lm, CRI90 COB LED



Accessories See Page 156

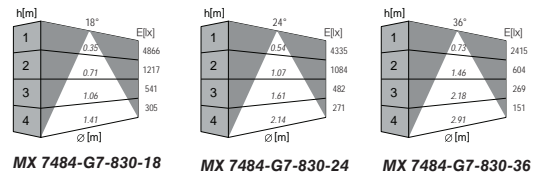



Wallwasher Version

MX 7485 - G7 - - **NA - 84**



Code	CRI	Code	CCT
8	80	27	2700K
9	90	30	3000K
		35	3500K
		40	4000K

- 8.4W 240mA 1282lm, CRI80 COB LED
- 8.4W 240mA 1041lm, CRI90 COB LED



MX 7485-G7-830

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-240mA-12-DN(42)	6 - 10W	Mini Glee 8.4W	240mA	220 x 45 x 30	Ø54
EC LED-SETmA-M12D-LT(42)	3 - 10W	Mini Glee 8.8W	250mA, 1-10V Dimmable	250 x 65 x 40	Ø78 require access panel

Mini Glee Spot

- Die cast aluminium trim
- Polycarbonate secondary optics with various colour options
- Tilting and rotation allowed
- Separate order of remote LED driver available upon request





Adjustable Version





MX 7483 - G7 - [] - [] - []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	18	18°	82	White Trim & Black Reflector
6	90	30	3000K	24	24°	84	White Trim & Silver Reflector
		35	3500K	36	36°	86	White Trim & Sandblasted Reflector
		40	4000K			89	White Trim & Rose Gold Reflector

- 8.4W 240mA 1282lm, CRI80 COB LED
- 8.4W 240mA 1058lm, CRI90 COB LED



Accessories See Page 156



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-240mA-12-DN(42)	6 - 10W	Mini Glee 8.4W	240mA	220 x 45 x 30	Ø54
EC LED-SETmA-M12D-LT(40)	3 - 10W	Mini Glee 8.8W	250mA, 1-10V Dimmable	250 x 65 x 40	Ø78 require access panel

Slim

- Aluminium trim
- Adjustable and fixed version available
- Small diameter for flexible interior design
- Two height versions with different lumen package
- Separate order of remote LED driver available upon request




Fixed Version

MX 7601 - G6 - [] - [] - []



Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	25	25°	84	White Trim & Silver Reflector
6	90	30	3000K	38	38°	14	Black Trim & Silver Reflector
		35	3500K	58	58°		
		40	4000K				

- 2.4W 150mA 466lm, CRI80 COB LED
- 2.4W 150mA 378lm, CRI90 COB LED






Adjustable Version

MX 7602 - G6 - [] - [] - []




Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	25	25°	84	White Trim & Silver Reflector
6	90	30	3000K	38	38°	14	Black Trim & Silver Reflector
		35	3500K	58	58°		
		40	4000K				


- 2.4W 150mA 466lm, CRI80 COB LED
- 2.4W 150mA 378lm, CRI90 COB LED



MX 7601-G6-830-25



MX 7601-G6-830-38



MX 7601-G6-830-58

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-150mA-7-DN(42)	2 - 3W	Slim 2.4W	150mA	220 x 45 x 30	Ø54 require access panel
EC LED-SETmA-M12D-LT(40)	2 - 6W		150mA, 1-10V Dimmable	250 x 65 x 40	Ø78 require access panel

Slim HP

- Aluminium trim
- Adjustable and fixed version available
- Small diameter for flexible interior design
- Two height versions with different lumen package
- Separate order of remote LED driver available upon request




Fixed Version

MX 7603 - G6 - [] [] [] - [] [] [] - [] [] []



Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	25	25°	84	White Trim & Silver Reflector
9	90	30	3000K	38	38°	14	Black Trim & Silver Reflector
		35	3500K	58	58°		
		40	4000K				

- 5.9W 350mA 1027lm, CRI80 COB LED
- 5.9W 350mA 833lm, CRI90 COB LED






Adjustable Version

MX 7604 - G6 - [] [] [] - [] [] [] - [] [] []



Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	25	25°	84	White Trim & Silver Reflector
9	90	30	3000K	38	38°	14	Black Trim & Silver Reflector
		35	3500K	58	58°		
		40	4000K				

- 5.9W 350mA 1027lm, CRI80 COB LED
- 5.9W 350mA 833lm, CRI90 COB LED

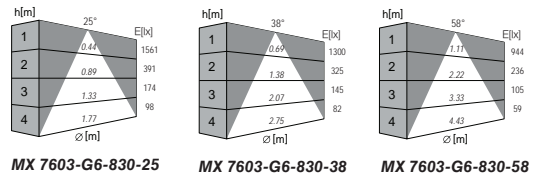

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-350mA-DN(42)	4 - 8W	Slim HP 5.9W	350mA	220 x 45 x 30	Ø54 require access panel
EC LED-SETmA-M12D-LT(40)	4 - 12W		350mA, 1-10V Dimmable	250 x 65 x 40	Ø78 require access panel

Pin Hole Mini

- Recessed downlight for LED module
- Adjustable and fixed version available
- Die cast aluminium body available in 2 colours
- Separate order of remote LED driver available upon request




Fixed Version

MX 7616 - G6 - [] [] [] - [] [] [] - [] [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80	White
9	90	30	3000K	24	24°	10	Black
		35	3500K	36	36°		
		40	4000K				


- 8.4W 240mA 1282lm, CRI80 COB LED
- 8.4W 240mA 1058lm, CRI90 COB LED

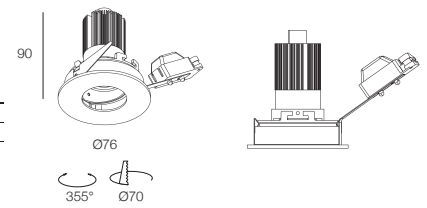

Fixed Version with Cover Glass, IP55

MX 7616C - G6 - [] [] [] - [] [] [] - [] [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80	White
9	90	30	3000K	24	24°	10	Black
		35	3500K	36	36°		
		40	4000K				

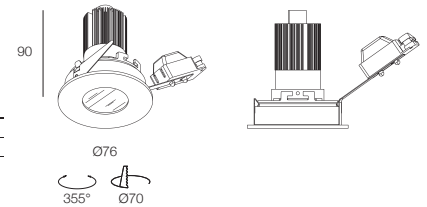


Adjustable Version

MX 7617 - G6 - [] [] [] - [] [] [] - [] [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80	White
9	90	30	3000K	24	24°	10	Black
		35	3500K	36	36°		
		40	4000K				


- 8.4W 240mA 1282lm, CRI80 COB LED
- 8.4W 240mA 1058lm, CRI90 COB LED

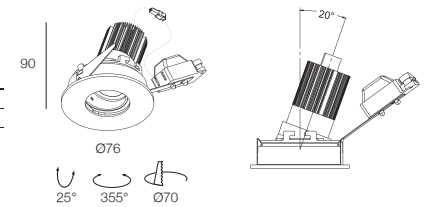



Adjustable Version with Cover Glass, IP55

MX 7617C - G6 - [] [] [] - [] [] [] - [] [] []


Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80	White
9	90	30	3000K	24	24°	10	Black
		35	3500K	36	36°		
		40	4000K				

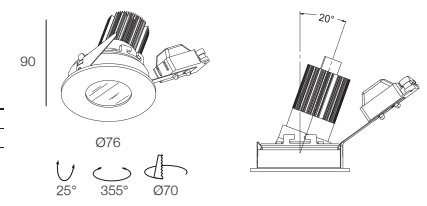


Accessories See Page 157



MX 7616-G6-830-15



MX 7616-G6-830-24



MX 7616-G6-830-36

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-240mA-12-DN42)	6 - 10W	Pin Hole Mini 8.4W	240mA	220 x 45 x 30	Ø54
EC LED-SETmA-M12D-LT(40)	3 - 10W	Pin Hole Mini 8.8W	250mA, 1-10V Dimmable	250 x 65 x 40	Ø78 require access panel

LED EYE

- Recessed downlight for LED
- Adjustable and fixed version available
- Die cast aluminium trim and body available in 2 colours
- "Plug -in" male connector with 800mm wire provided
- Beam angle available in 15°, 27° and 43°
- Separate order of remote LED driver and connecting accessories are available upon request




Adjustable Version

MX 7401 - G5 - [] [] [] - [] [] [] - [] [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	20	20°	80	White
9	90	30	3000K	27	27°	10	Black
		35	3500K	46	46°		
		40	4000K				

1 x 2.1W 700mA 188lm High Power LED






Fixed Version

MX 7402 - G5 - [] [] [] - [] [] [] - [] [] []

Code	CCT	Code	Beam Angle	Code	Colour
27	2700K	20	20°	80	White
30	3000K	27	27°	10	Black
35	3500K	46	46°		
40	4000K				


1 x 2.1W 700mA 228lm High Power LED

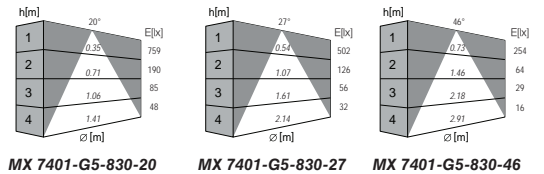

Accessory


MX 5923

6 terminal series connector with 2 meter wire (included 3 Terminal End)




MX 5924

Terminal End



MX 5925

2m extension wire



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-700mA-3-ER(39)	2 - 3W	Max 1pc LED Eye (2.1W)	700mA	180 x 54 x 35	Ø65 require access panel
EC LED-SETmA-M20-U-TCI(40)	2 - 20W	Max 6pcs LED Eye (12.6W) (Series connection)		250 x 65 x 40	Ø78 require access panel

* 350mA LED Driver for 1W available on request

XITO

- Recessed downlight for LED module
- Adjustable and fixed version available
- Die cast aluminium trim
- Polycarbonate reflector in silver vacuum plating
- SDCM Step 1x2, high colour temperature stability
- CRI95+ option
- Separate order of remote LED driver is available upon request
- Xicato Vibrant V8/ V95 version available upon request




Fixed Version



MX 7328 - 13T8 - G5 - - 84

Code	CCT	Code	Beam Angle
27	2700K	20	20°
30	3000K	40	40°
35	3500K	60	60°
40	4000K		


9.5W 700mA 1300lm, CRI80+ Xicato XTM LED Module



MX 7348 - 13T9 - G5 - - 84

Code	CCT	Code	Beam Angle
27	2700K	20	20°
30	3000K	40	40°
35	3500K	60	60°
40	4000K		

13.3W 700mA 1300lm, CRI95+ Xicato XTM LED Module




Adjustable Version



MX 7329 - 13T8 - G5 - - 84

Code	CCT	Code	Beam Angle
27	2700K	20	20°
30	3000K	40	40°
35	3500K	60	60°
40	4000K		



9.5W 700mA 1300lm, CRI80+ Xicato XTM LED Module




MX 7349 - 13T9 - G5 - - 84

Code	CCT	Code	Beam Angle
27	2700K	20	20°
30	3000K	40	40°
35	3500K	60	60°
40	4000K		


13.3W 700mA 1300lm, CRI95+ Xicato XTM LED Module



MX 7328-13T830-G5-20



MX 7328-13T830-G5-40




MX 7328-13T830-G5-60

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-SETmA-M30-PF-TCI(40)	4 - 30W	XITO 13T8 (9.5W)	700mA	250 x 65 x 40	Ø78
EC LED-SETmA-M20D-MiAM-TCI(40)	3 - 20W	XITO 13T9 (13.3W)	700mA, 1-10V Dimmable		

B. Spot

- Recessed downlight for LED Module
- Adjustable and fixed version available
- Die cast aluminium trim
- Beam angle available in 11°
- Polycarbonate Collimator in silver vacuum plating
- Separate order of remote LED driver is available upon request




Fixed Version

MX 7428 - G6 - [] [] - 11 - 84



Code	CRI	Code	CCT
8	80	27	2700K
9	90	30	3000K
		35	3500K
		40	4000K

- 17.8W 550mA 2847lm, CRI80 COB LED
- 17.8W 550mA 2306lm, CRI90 COB LED





Adjustable Version

MX 7429 - G6 - [] [] - 11 - 84



Code	CRI	Code	CCT
8	80	27	2700K
9	90	30	3000K
		35	3500K
		40	4000K

- 17.8W 550mA 2847lm, CRI80 COB LED
- 17.8W 550mA 2306lm, CRI90 COB LED

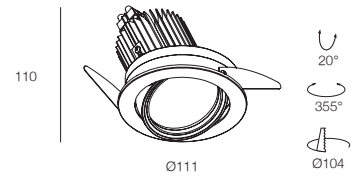

MX 7428-G6-830-11

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-550mA-20-DN(40)	14 - 22W	B.Spot 17.8W	550mA	250 x 65 x 40	Ø78
EC LED-SETmA-M20D-MiAM-TCI(40)	2 - 20W		550mA, 1-10V Dimmable		

TINY COB

- Recessed downlight for LED Module
- Beam angle available in 13°, 25° and 38°
- Die cast aluminium body with black anti glare tube
- Adjustable and fixed version available
- Separate order of remote LED driver available upon request




Fixed Version

MX 7384 - G6 - [] - [] - 84

Code	CRI	Code	CCT	Code	Beam Angle
8	80	27	2700K	13	13°
9	90	30	3000K	25	25°
		35	3500K	38	38°
		40	4000K		

- 5W 150mA 895lm, CRI80 COB LED
- 5W 150mA 727lm, CRI90 COB LED
- 8.3W 240mA 1371lm, CRI80 COB LED
- 8.3W 240mA 1114lm, CRI90 COB LED





Fixed Version

MX 7385 - G6 - [] - [] - 84

Code	CRI	Code	CCT	Code	Beam Angle
8	80	27	2700K	13	13°
9	90	30	3000K	25	25°
		35	3500K	38	38°
		40	4000K		

- 5W 150mA 895lm, CRI80 COB LED
- 5W 150mA 727lm, CRI90 COB LED
- 8.3W 240mA 1371lm, CRI80 COB LED
- 8.3W 240mA 1114lm, CRI90 COB LED

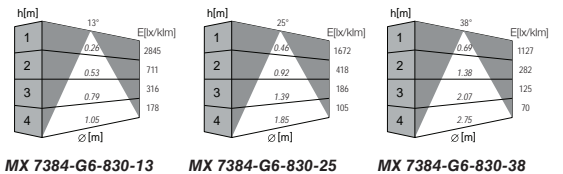

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-150mA-12-DN(42)	4 - 6W	TINY COB 5W	150mA	220 x 45 x 30	Ø54
EC LED-SETmA-M12D-LT(40)	2 - 6W		150mA, 1-10V Dimmable	250 x 65 x 40	Ø78 require access panel
EC LED-240mA-12-DN(42)	6 - 10W	TINY COB 8.3W	240mA	220 x 45 x 30	Ø54
EC LED-SETmA-M12D-LT(40)	3 - 10W	TINY COB 8.7W	250mA, 1-10V Dimmable	250 x 65 x 40	Ø78 require access panel

Gones

- Recessed downlight for LED Module
- Die cast aluminium trim
- Adjustable Beam Angle version available
- Separate order of remote LED driver is available upon request






Adjustable Version

MX 7414 - G7 - [] [] [] - [] [] [] - [] [] []




Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	16	16°	80	White Body
9	90	30	3000K	26	26°	10	Black Body
		35	3500K	36	36°		
		40	4000K				


- 8.4W 240mA 1282lm, CRI80 COB LED
- 8.4W 240mA 1058m, CRI90 COB LED



MX 7414-G7-830-16



MX 7414-G7-830-26



MX 7414-G7-830-36




Adjustable Beam Angle Version

MX 7413 - G6 - [] [] [] - [] [] [] - [] [] []




Code	CRI	Code	CCT	Code	Colour
8	80	27	2700K	80	White Body
9	90	30	3000K	10	Black Body
		35	3500K		
		40	4000K		


- 8.4W 240mA 1282lm, CRI80 COB LED
- 8.4W 240mA 1058m, CRI90 COB LED



Adjustable beam angle from 11° - 39°



MX 7413-G6-830



MX 7413-G6-830

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-240mA-12-DN(42)	6 - 10W	Gones 8.4W	240mA	220 x 45 x 30	Ø54
EC LED-SETmA-M12D-LT(40)	3 - 10W	Gones 8.8W	250mA, 1-10V Dimmable	250 x 65 x 40	Ø78

Multi Mini Xito

- Recessed downlight for LED Module
- Polycarbonate reflector in silver vacuum plating
- SDCM Step 1x2, high colour temperature stability
- Metal trim and body with various colour options
- Separate order of remote LED driver available upon request
- Xicato Vibrant V8/ V95 version available upon request



MX 7481S - 13T8 - G5 - [] - [] - []

Code	CCT	Code	Beam Angle	Code	Colour
27	2700K	20	20°	80B	White Trim & Black Body
30	3000K	40	40°	80W	White Trim & Body
35	3500K	60	60°	10B	Black Trim & Body
40	4000K				


9.5W 700mA, 1300lm, CRI80+ Xicato XTM LED Module



MX 7481D - 13T8 - G5 - [] - [] - []

Code	CCT	Code	Beam Angle	Code	Colour
27	2700K	20	20°	80B	White Trim & Black Body
30	3000K	40	40°	80W	White Trim & Body
35	3500K	60	60°	10B	Black Trim & Body
40	4000K				


2 X 9.5W 700mA, 1300lm, CRI80+ Xicato XTM LED Module




MX 7481T - 13T8 - G5 - [] - [] - []

Code	CCT	Code	Beam Angle	Code	Colour
27	2700K	20	20°	80B	White Trim & Black Body
30	3000K	40	40°	80W	White Trim & Body
35	3500K	60	60°	10B	Black Trim & Body
40	4000K				


3 X 9.5W 700mA, 1300lm, CRI80+ Xicato XTM LED Module




Accessories See Page 156



MX 7481S-13T8...-20



MX 7481S-13T8...-40



MX 7481S-13T8...-60

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-SETmA-M30-PF-TCI(40)	4 - 30W	Multi Mini Xito 13T8 (9.3W)	700mA	250 x 65 x 40	Ø78
EC LED-SETmA-M20D-MiAM-TCI(40)	3 - 20W		700mA, 1-10V Dimmable		

Multi Mini Xito Trimless


- Recessed downlight for LED Module
- Polycarbonate reflector in silver vacuum plating
- SDCM Step 1x2, high colour temperature stability
- Body with various colour options
- Separate order of remote LED driver available upon request
- Xicato Vibrant V8/ V95 version available upon request



MX 7482S - 13T8 - - -
 Trimless Installation Kit
MX TIK52S - - - -

Code	CCT	Code	Beam Angle	Code	Colour	Colour of Installation Kit
27	2700K	20	20°	00B	Black Body	Black
30	3000K	40	40°	80W	White Body	White
35	3500K	60	60°			
40	4000K					


9.5W 700mA, 1300lm, CRI80+ Xicato XTM LED Module



MX 7482D - 13T8 - - -
 Trimless Installation Kit
MX TIK52D - - - -

Code	CCT	Code	Beam Angle	Code	Colour	Colour of Installation Kit
27	2700K	20	20°	00B	Black Body	Black
30	3000K	40	40°	80W	White Body	White
35	3500K	60	60°			
40	4000K					



2 X 9.5W 700mA, 1300lm, CRI80+ Xicato XTM LED Module







MX 7482T - 13T8 - - -
 Trimless Installation Kit
MX TIK52T - - - -

Code	CCT	Code	Beam Angle	Code	Colour	Colour of Installation Kit
27	2700K	20	20°	00B	Black Body	Black
30	3000K	40	40°	80W	White Body	White
35	3500K	60	60°			
40	4000K					

3 X 9.5W 700mA, 1300lm, CRI80+ Xicato XTM LED Module



Accessories See Page 156



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-SETmA-M30-PF-TCI(40)	4 - 30W	Multi Mini Xito Trimless 13T8 (9.3W)	700mA	250 x 65 x 40	Ø78
EC LED-SETmA-M20D-MiAM-TCI(40)	3 - 20W		700mA, 1-10V Dimmable		

Multi Mini Spot COB


- Recessed downlight for LED Module
- Polycarbonate Collimator
- Reflector angle available in 11°
- Metal trim and body with various colour options
- Separate order of remote LED driver available upon request



MX 7454S - G6 - [] [] [] - 11 - [] [] []



Code	CCT	Code	CCT	Code	Colour
8	80	27	2700K	80B	White Trim & Black Body
9	90	30	3000K	80W	White Trim & Body
		35	3500K	10B	Black Trim & Body
		40	4000K		




- 17.8W, 550mA, 2847lm, CRI80 COB LED
- 17.8W, 550mA, 2306lm, CRI90 COB LED

MX 7454D - G6 - [] [] [] - 11 - [] [] []



Code	CCT	Code	CCT	Code	Colour
8	80	27	2700K	80B	White Trim & Black Body
9	90	30	3000K	80W	White Trim & Body
		35	3500K	10B	Black Trim & Body
		40	4000K		




- 2 X ● 17.8W, 550mA, 2847lm, CRI80 COB LED
- 2 X ● 17.8W, 550mA, 2306lm, CRI90 COB LED

MX 7454T - G6 - [] [] [] - 11 - [] [] []



Code	CCT	Code	CCT	Code	Colour
8	80	27	2700K	80B	White Trim & Black Body
9	90	30	3000K	80W	White Trim & Body
		35	3500K	10B	Black Trim & Body
		40	4000K		

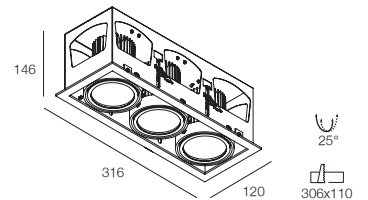


- 3 X ● 17.8W, 550mA, 2847lm, CRI80 COB LED
- 3 X ● 17.8W, 550mA, 2306lm, CRI90 COB LED


MX 7456 - G6 - [] [] [] - 11 - [] [] []





Code	CCT	Code	CCT	Code	Colour
8	80	27	2700K	80B	White Trim & Black Body
9	90	30	3000K	80W	White Trim & Body
		35	3500K	10B	Black Trim & Body
		40	4000K		



- 17.8W, 550mA, 2847lm, CRI 80 COB LED
- 17.8W, 550mA, 2306lm, CRI 90 COB LED



Accessories See Page 156



MX 7454S-G6-830-11

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-550mA-20-DN(40)	14 - 22W	Multi Mini Spot COB 1pc 17.8W COB LED	550mA	250 x 65 x 40	Ø78
EC LED-SETmA-M20D-MiAM-TCI(40)	2 - 20W		550mA, 1-10V Dimmable		

Multi Mini Spot COB Trimless

- Recessed downlight for LED Module
- Polycarbonate Collimator
- Beam angle available in 11°
- Body in various colour
- Separate order of remote LED driver available upon request



MX 7458S - G6 - 11 -


Trimless Installation Kit

MX TIK52S -

Code	CRI	Code	CCT	Code	Colour	Colour of Installation Kit
8	80	27	2700K	00B	Black Body	Black
9	90	30	3000K	80W	White Body	White
		35	3500K			
		40	4000K			

17.8W, 550mA, 2847lm, CRI80 COB LED

17.8W, 550mA, 2306lm, CRI90 COB LED



MX 7458D - G6 - 11 -


Trimless Installation Kit

MX TIK52D -

Code	CRI	Code	CCT	Code	Colour	Colour of Installation Kit
8	80	27	2700K	00B	Black Body	Black
9	90	30	3000K	80W	White Body	White
		35	3500K			
		40	4000K			

2 X 17.8W, 550mA, 2847lm, CRI80 COB LED

2 X 17.8W, 550mA, 2306lm, CRI90 COB LED



MX 7458T - G6 - 11 -


Trimless Installation Kit

MX TIK52T -


Code	CRI	Code	CCT	Code	Colour	Colour of Installation Kit
8	80	27	2700K	00B	Black Body	Black
9	90	30	3000K	80W	White Body	White
		35	3500K			
		40	4000K			

3 X 17.8W, 550mA, 2847lm, CRI80 COB LED

3 X 17.8W, 550mA, 2306lm, CRI90 COB LED



Accessories See Page 156



MX 7458S-G6-830-11

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-550mA-20-DN(40)	14 - 22W	Multi Mini Spot COB Trimless 1pc 17.8W COB LED	550mA	250 x 65 x 40	Ø78
EC LED-SETmA-M20D-MiAM-TCI(40)	2 - 20W		550mA, 1-10V Dimmable		

Multi Mini COB AT


- Recessed downlight for LED Module
- Polycarbonate reflector in silver vacuum plating
- Beam angle available in 15°, 24° and 36°
- Metal trim and body with various colour options
- Separate order of remote LED driver available



MX 7354S - G6 - [] [] [] - [] [] [] - [] [] []

Code	CCT	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80B	White Trim & Black Body
9	90	30	3000K	25	25°	80W	White Trim & Body
		35	3500K	38	38°	10B	Black Trim & Body
		40	4000K				


- 17.8W, 550mA, 2847lm, CRI80 COB LED
- 17.8W, 550mA, 2306lm, CRI90 COB LED



MX 7354D - G6 - [] [] [] - [] [] [] - [] [] []

Code	CCT	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80B	White Trim & Black Body
9	90	30	3000K	25	25°	80W	White Trim & Body
		35	3500K	38	38°	10B	Black Trim & Body
		40	4000K				


- 2 X 17.8W, 550mA, 2847lm, CRI80 COB LED
- 2 X 17.8W, 550mA, 2306lm, CRI90 COB LED



MX 7354T - G6 - [] [] [] - [] [] [] - [] [] []

Code	CCT	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80B	White Trim & Black Body
9	90	30	3000K	25	25°	80W	White Trim & Body
		35	3500K	38	38°	10B	Black Trim & Body
		40	4000K				



- 3 X 17.8W, 550mA, 2847lm, CRI80 COB LED
- 3 X 17.8W, 550mA, 2306lm, CRI90 COB LED





MX 7356 - G6 - [] [] [] - [] [] [] - [] [] []

Code	CCT	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80B	White Trim & Black Body
9	90	30	3000K	25	25°	80W	White Trim & Body
		35	3500K	38	38°	10B	Black Trim & Body
		40	4000K				


- 17.8W, 550mA, 2847lm, CRI80 COB LED
- 17.8W, 550mA, 2306lm, CRI90 COB LED




Accessories See Page 156



MX 7354S-G6-830-15



MX 7354S-G6-830-25




MX 7354S-G6-830-38

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-550mA-20-DN(40)	14 - 22W	Multi Mini COB AT 1pc 17.8W COB LED	550mA	250 x 65 x 40	Ø78
EC LED-SETmA-M20D-MiAM-TCI(40)	2 - 20W		550mA, 1-10V Dimmable		

Multi Mini COB Trimless AT


- Recessed downlight for LED Module
- Polycarbonate reflector
- Beam angle available in 15°, 24° and 36°
- Body in various colour
- Separate order of remote LED driver available



MX 7358S - G6 - [] [] [] - [] [] [] [] [] []
 Trimless Installation Kit
MX TIK52S - [] [] [] [] [] [] [] [] [] [] [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour	Colour of Installation Kit
8	80	27	2700K	15	15°	00B	Black Body	Black
9	90	30	3000K	25	25°	80W	White Body	White
		35	3500K	38	38°			
		40	4000K					


- 17.8W, 550mA, 2847lm, CRI80 COB LED
- 17.8W, 550mA, 2306lm, CRI90 COB LED



MX 7358D - G6 - [] [] [] - [] [] [] [] [] []
 Trimless Installation Kit
MX TIK52D - [] [] [] [] [] [] [] [] [] [] [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour	Colour of Installation Kit
8	80	27	2700K	15	15°	00B	Black Body	Black
9	90	30	3000K	25	25°	80W	White Body	White
		35	3500K	38	38°			
		40	4000K					





- 2 X 17.8W, 550mA, 2847lm, CRI80 COB LED
- 2 X 17.8W, 550mA, 2306lm, CRI90 COB LED



MX 7358T - G6 - [] [] [] - [] [] [] [] [] []
 Trimless Installation Kit
MX TIK52T - [] [] [] [] [] [] [] [] [] [] [] []


Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour	Colour of Installation Kit
8	80	27	2700K	15	15°	00B	Black Body	Black
9	90	30	3000K	25	25°	80W	White Body	White
		35	3500K	38	38°			
		40	4000K					

- 3 X 17.8W, 550mA, 2847lm, CRI80 COB LED
- 3 X 17.8W, 550mA, 2306lm, CRI90 COB LED

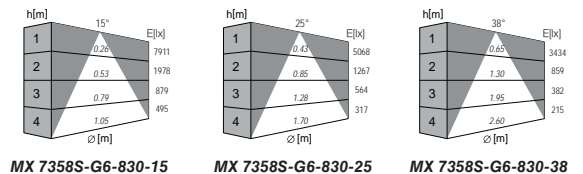

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Current	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-550mA-20-DN(40)	14 - 22W	Multi Mini COB Trimless AT 1pc 17.8W COB LED	550mA	250 x 65 x 40	Ø78
EC LED-SETmA-M20D-MiAM-TCI(40)	2 - 20W		550mA, 1-10V Dimmable		

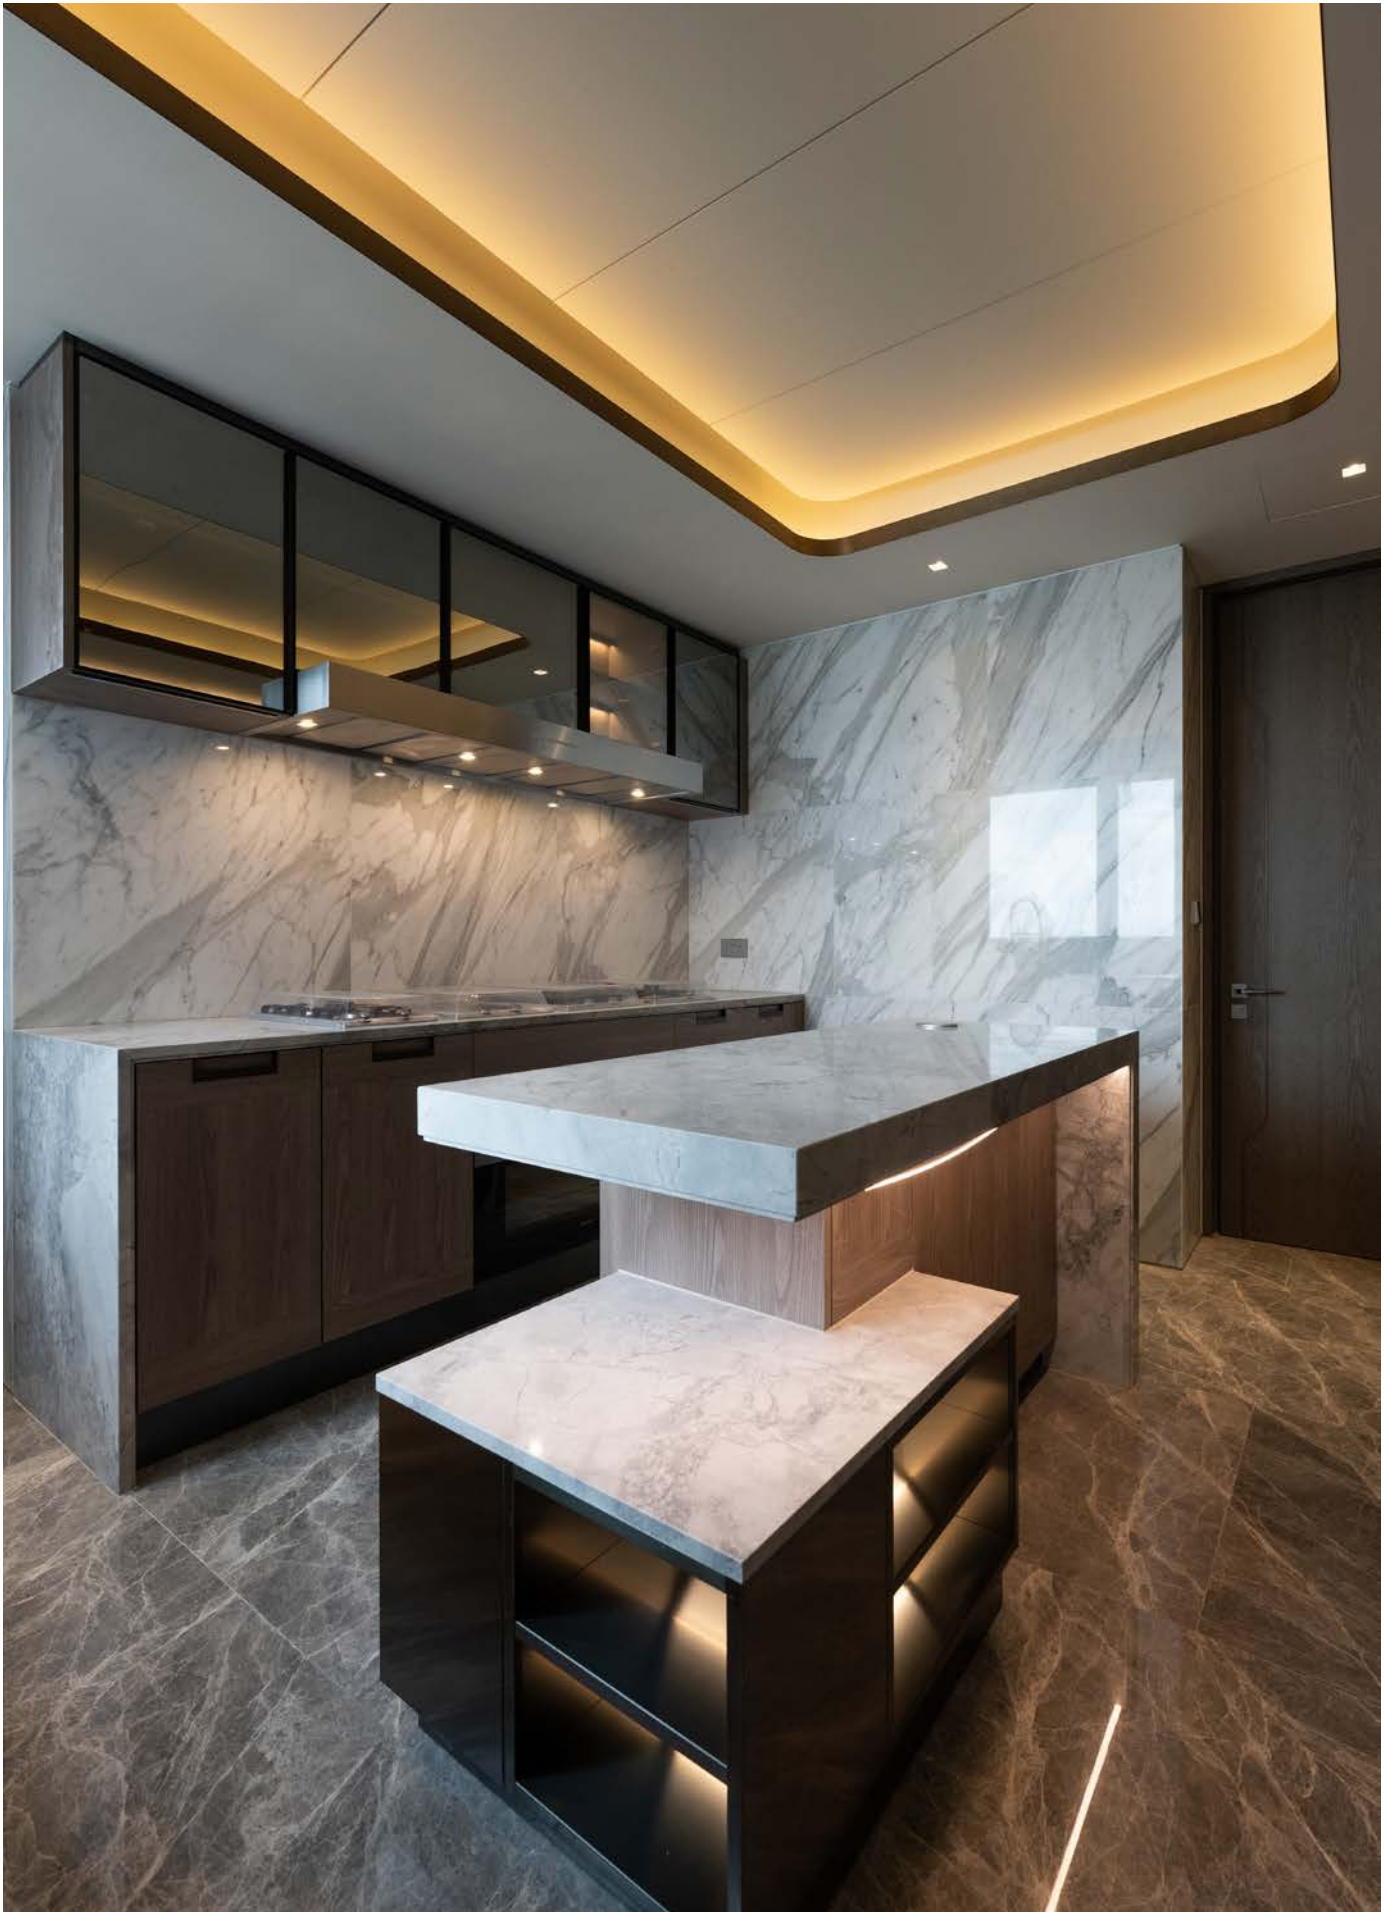



Surface Mounted Downlight

/ Index




88

Club



89

Club COB




90

Multi Box
Lite COB



91

Multi Box Mini
XOB AT



92

Multi Box Mini
COB AT

Insider Focal

Club

Flexible Surface-Mounted Design

An elegant surface mounted downlight with a PVD Reflector and is adjustable on request. Club is developed specifically for the most demanding lighting application for retail and transitional spaces.





Club

- Surface mounted for LED Module
- Adjustable and fixed version available
- Die cast aluminium trim
- Polycarbonate Reflector in silver vacuum plating
- SDCM Step 1x2, high colour temperature stability
- Xicato Vibrant V8/ V95 version available upon request
- Integrated LED driver




Adjustable Version

MX 7441 - 13T8 - G6 - -

Code	CCT	Code	Beam Angle	Code	Colour
27	2700K	20	20°	80	White
30	3000K	40	40°	10	Black
35	3500K	60	60°		
40	4000K				

9.5W 1300lm 700mA, CRI80+ Xicato XTM LED Module, Integrated Driver





Fixed Version


MX 7442 - 13T8 - G6 - -

Code	CCT	Code	Beam Angle	Code	Colour
27	2700K	20	20°	80	White
30	3000K	40	40°	10	Black
35	3500K	60	60°		
40	4000K				


9.5W 1300lm 700mA, CRI80+ Xicato XTM LED Module, Integrated Driver



MX 7441-13T8...-20




MX 7441-13T8...-40



MX 7441-13T8...-60

Club COB

- Surface mounted for LED Module
- Adjustable and fixed version
- Die cast aluminium trim
- Polycarbonate Reflector with 3 angle options
- Integrated LED drive




Adjustable Version

MX 7641 - G6 - [] - [] - []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	16	16°	80	White
9	90	30	3000K	24	24°	10	Black
		35	3500K	38	38°		
		40	4000K				

- 11.7W 350mA 2086lm, CRI80 COB LED, Integrated Driver
- 11.7W 350mA 1693lm, CRI90 COB LED, Integrated Driver






Fixed Version


MX 7642 - G6 - [] - [] - []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	16	16°	80	White
9	90	30	3000K	24	24°	10	Black
		35	3500K	38	38°		
		40	4000K				


- 11.7W 350mA 2086lm, CRI80 COB LED, Integrated Driver
- 11.7W 350mA 1693lm, CRI90 COB LED, Integrated Driver



MX 7641-G6-830-16



MX 7641-G6-830-24



MX 7641-G6-830-38

Multi Box Lite COB


- Surface mounted downlight for LED module
- Beam angle available in 15°, 24° and 36°
- Aluminium housing, metal body available in different colours upon request
- Integrated LED driver




Fixed Version

MX 7614 - G7 - [] [] - [] [] - [] []


Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	82	White Body & Black Reflector
9	90	30	3000K	24	24°	84	White Body & Matt Silver Reflector
		35	3500K	36	36°	12	Black Body & Reflector
		40	4000K			14	Black Body & Matt Silver Reflector




- 7.6W 250mA 1383lm, CRI80 COB LED, Integrated Driver
- 7.6W 250mA 1120lm, CRI90 COB LED, Integrated Driver



MX 7614-G7-830-15



MX 7614-G7-830-24




MX 7614-G7-830-36




Adjustable Version

MX 7615 - G7 - [] [] - [] [] - [] []


Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	82	White Body & Black Reflector
9	90	30	3000K	24	24°	84	White Body & Matt Silver Reflector
		35	3500K	36	36°	12	Black Body & Reflector
		40	4000K			14	Black Body & Matt Silver Reflector




- 7.6W 250mA 1383lm, CRI80 COB LED, Integrated Driver
- 7.6W 250mA 1120lm, CRI90 COB LED, Integrated Driver




MX 7615-G7-830-15




MX 7615-G7-830-24



MX 7615-G7-830-36




Accessories See Page 156



Multi Box Mini XOB AT


- Surface mounted downlight for LED module
- Beam angle available in 15°, 25° and 38°
- Aluminium housing, metal body available in different colours upon request
- Possible tilt adjustment
- Integrated LED driver
- Xicato Vibrant V95 version available upon request



MX 7634S - 09OB [] [] [] - G7 - [] [] [] []



Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
90	90	27	2700K	15	15°	80B	White Housing & Black Body
95	95	30	3000K	25	25°	80W	White Housing & Body
		35	3500K	38	38°	10B	Black Housing & Body
		40	4000K				




- 8.4W 250mA 1151lm, CRI90 Xicato XOB LED Module, Integrated Driver
- 8.4W 250mA 1020lm, CRI95 Xicato XOB LED Module, Integrated Driver

MX 7634D - 09OB [] [] [] - G7 - [] [] [] []



Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
90	90	27	2700K	15	15°	80B	White Housing & Black Body
95	95	30	3000K	25	25°	80W	White Housing & Body
		35	3500K	38	38°	10B	Black Housing & Body
		40	4000K				




- 2 X 8.4W 250mA 1151lm, CRI90 Xicato XOB LED Module, Integrated Driver
- 2 X 8.4W 250mA 1020lm, CRI95 Xicato XOB LED Module, Integrated Driver




MX 7634T - 09OB [] [] [] - G7 - [] [] [] []



Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
90	90	27	2700K	15	15°	80B	White Housing & Black Body
95	95	30	3000K	25	25°	80W	White Housing & Body
		35	3500K	38	38°	10B	Black Housing & Body
		40	4000K				




- 3 X 8.4W 250mA 1151lm, CRI90 Xicato XOB LED Module, Integrated Driver
- 3 X 8.4W 250mA 1020lm, CRI95 Xicato XOB LED Module, Integrated Driver

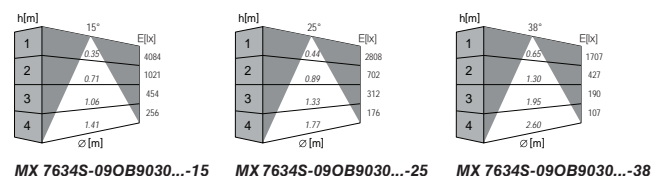

Multi Box Mini COB AT


- Surface mounted downlight for LED module
- Beam angle available in 15°, 25° and 38°
- Aluminium housing, metal body available in different colours upon request
- Possible tilt adjustment
- Integrated LED driver



MX 7334S - G7 - [] [] [] - [] [] [] - [] [] []



Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80B	White Housing & Black Body
9	90	30	3000K	25	25°	80W	White Housing & Body
		35	3500K	38	38°	10B	Black Housing & Body
		40	4000K				




☞ 7.6W 250mA 1383lm, CRI80 COB LED, Integrated Driver

☞ 7.6W 250mA 1120lm, CRI90 COB LED, Integrated Driver

MX 7334D - G7 - [] [] [] - [] [] [] - [] [] []



Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80B	White Housing & Black Body
9	90	30	3000K	25	25°	80W	White Housing & Body
		35	3500K	38	38°	10B	Black Housing & Body
		40	4000K				




2 X ☞ 7.6W 250mA 1383lm, CRI80 COB LED, Integrated Driver

2 X ☞ 7.6W 250mA 1120lm, CRI90 COB LED, Integrated Driver

MX 7334T - G7 - [] [] [] - [] [] [] - [] [] []






Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80B	White Housing & Black Body
9	90	30	3000K	25	25°	80W	White Housing & Body
		35	3500K	38	38°	10B	Black Housing & Body
		40	4000K				




3 X ☞ 7.6W 250mA 1383lm, CRI80 COB LED, Integrated Driver


3 X ☞ 7.6W 250mA 1120lm, CRI90 COB LED, Integrated Driver



MX 7334S-G7-830-15



MX 7334S-G7-830-25



MX 7334S-G7-830-38





Tracklight

/ Index




Glek IB



Armbox IB



Tracbox COB IB



Mini Armbox



Mini IB


Insider Focal

Glek IB

*Minimalist Design
provides Good Direct Illumination*

GLEK IB provides a clean and elegant track light solution with their integrated driver design for your project. Extremely versatile, they can be positioned horizontally or vertically and then secured in place.

Offering 12 reflector colour options in a white housing, GLEK IB allows a bi-colour luminaire design for greater design freedom and individuality.

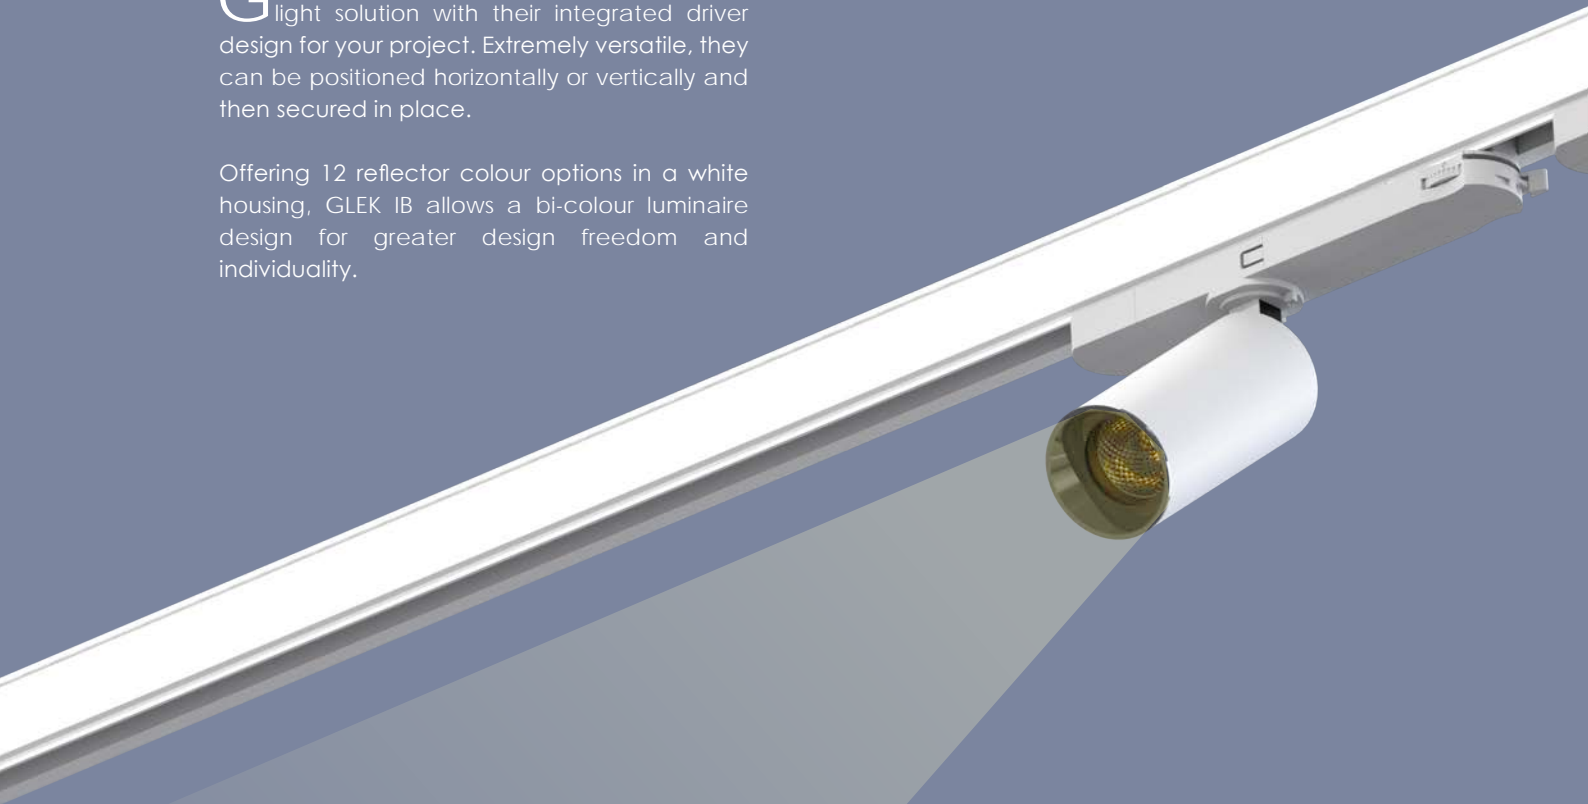



Armbox IB

High-Output Solution




Designed with compact body, unique heat sink and built-in driver, the Armbox IB is perfect to highlight and elevate the space. The radial cold forged heat sink maximise the heat dissipation surface area and allows for optimal LED thermal management.

Armbox IB offers a wide range of beam angle varying from 18° to 42°, creating a diverse and dramatic atmosphere for target object in different accent lighting environments. It is the ideal luminaire for high output commercial lighting applications.

Glek IB

- Aluminium body
- Polycarbonate secondary optics with various colour options
- Intergrated LED driver with 3 phase track adaptor
- Surface mounted version upon request





20°, 40°, 60° Version

MX 6412 - G6 - [] [] [] - [] [] [] - [] [] []







Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	90	27	2700K	20	20°	82	White Body & Black Reflector
9	90	30	3000K	40	40°	84	White Body & Silver Reflector
		35	3500K	60	60°	86	White Body & Sandblasted Reflector
		40	4000K			89	White Body & Rose Gold Reflector
						12	Black Body & Black Reflector
						14	Black Body & Silver Reflector
						16	Black Body & Sandblasted Reflector
						19	Black Body & Rose Gold Reflector

- 16.2W 500mA 2588lm, CRI80, COB LED Module, Integrated Driver
- 16.2W 500mA 2097lm, CRI90, COB LED Module, Integrated Driver

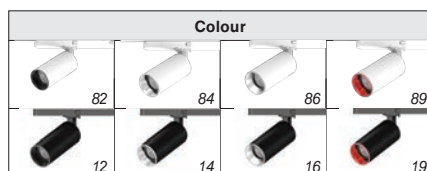



Accessories See Page 157



Armbox IB

- Tracklight with 3-phase adaptor for LED Module
- Beam angle available in 11°, 18°, 28° and 42°
- Aluminium body available in 2 colours
- Integrated LED driver
- Surface mounted version upon request





18°, 28°, 42° Version

MX 6385 - G7 - □ □ □ - □ □ □ - □ □ □

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	18	18°	80	White
9	90	30	3000K	28	28°	10	Black
		35	3500K	42	42°		
		40	4000K				

- 29.2W 850mA 5097lm, CRI80, COB LED Module, Integrated Driver
- 29.2W 850mA 4138lm, CRI90, COB LED Module, Integrated Driver

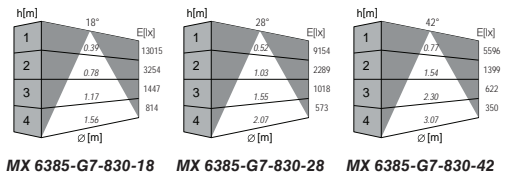

MX 6385-G7-830-18 MX 6385-G7-830-28 MX 6385-G7-830-42





Narrow Spot 11° Version


MX 6386 - G7 - □ □ □ - 11 - □ □ □

Code	CRI	Code	CCT	Code	Colour
8	80	27	2700K	80	White
9	90	30	3000K	10	Black
		35	3500K		
		40	4000K		

- 26.9W 800mA 3982lm, CRI80, COB LED Module, Integrated Driver
- 26.9W 800mA 3226lm, CRI90, COB LED Module, Integrated Driver




Accessories See Page 156



MX 6386-G7-830-11

Tracbox COB IB

- Tracklight with 3-phase adaptor for LED Module
- Beam angle available in 18°, 28° and 42°
- Aluminium body available in 2 colours
- Integrated LED driver
- Surface mounted version upon request





Standard Version

MX 6373 - G7 - [] [] - [] [] - [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	18	18°	80	White
9	90	30	3000K	28	28°	10	Black
		35	3500K	42	42°		
		40	4000K				

- 14.7W 450mA 2889lm, CRI80, COB LED Module, Integrated Driver
- 14.7W 450mA 2345lm, CRI90, COB LED Module, Integrated Driver


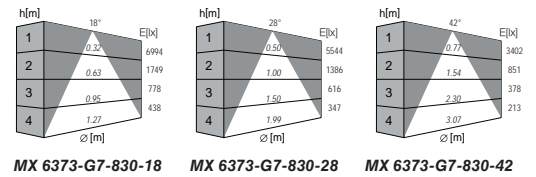



High-Power Version

MX 6374 - G7 - [] [] - [] [] - [] []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	18	18°	80	White
9	90	30	3000K	28	28°	10	Black
		35	3500K	42	42°		
		40	4000K				

- 20.3W 600mA 3669lm, CRI80, COB LED Module, Integrated Driver
- 20.3W 600mA 2978lm, CRI90, COB LED Module, Integrated Driver

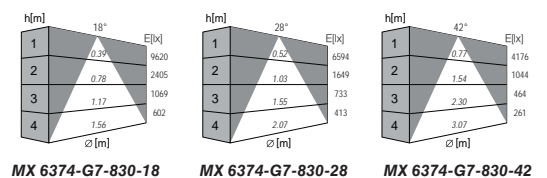


Accessories See Page 156



Mini Armbox



- Tracklight with single-phase adaptor for LED Module
- Beam angle available in 15°, 25° and 38°
- Adjustable beam angle version available
- Aluminium body available in 2 colours
- Integrated LED driver
- Surface mounted version upon request



MX 6384 - G6 - [] - [] - []

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80	White
9	90	30	3000K	25	25°	10	Black
		35	3500K	38	38°		
		40	4000K				

- 10.9W 350mA 1890lm, CRI80, COB LED Module, Integrated Driver
- 10.9W 350mA 1531lm, CRI90, COB LED Module, Integrated Driver

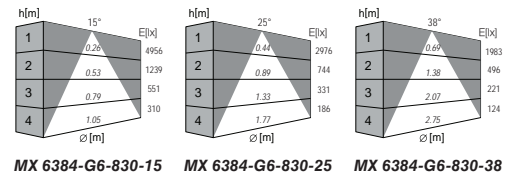

MX 6384-G6-830-15 MX 6384-G6-830-25 MX 6384-G6-830-38





Adjustable Beam Angle Version



MX 6383 - G6 - [] - [] - []

Code	CRI	Code	CCT	Code	Colour
8	80	27	2700K	80	White
9	90	30	3000K	10	Black
		35	3500K		
		40	4000K		

- 10.9W 350mA 1890lm, CRI80, COB LED Module, Integrated Driver
- 10.9W 350mA 1531lm, CRI90, COB LED Module, Integrated Driver

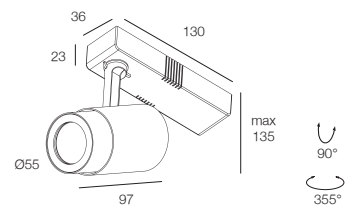


Adjustable beam angle from 11° - 39°



MX 6383-G6-830 MX 6383-G6-830

Mini IB

- Tracklight with 3-phase adaptor for LED Module
- Beam angle available in 11°, 15°, 25° and 38°
- Aluminium body available in 2 colours
- Integrated LED driver
- Surface mounted version upon request





15°, 25°, 38° Version

MX 6403 - G7 - □ □ □ - □ □ □ - □ □ □

Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
8	80	27	2700K	15	15°	80	White
9	90	30	3000K	25	25°	10	Black
		35	3500K	38	38°		
		40	4000K				

- 8.8W 250mA 1335lm, CRI80, COB LED Module, Integrated Driver
- 8.8W 250mA 1084lm, CRI90, COB LED Module, Integrated Driver

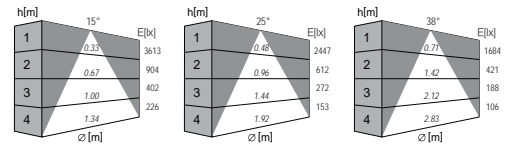

MX 6403-G6-830-15 MX 6403-G6-830-25 MX 6403-G6-830-38






Narrow Spot 11° Version


MX 6404 - G7 - □ □ □ - 11 - □ □ □

Code	CRI	Code	CCT	Code	Colour
8	80	27	2700K	80	White
9	90	30	3000K	10	Black
		40	4000K		

- 8.8W 250mA 1335lm, CRI80, COB LED Module, Integrated Driver
- 8.8W 250mA 1084lm, CRI90, COB LED Module, Integrated Driver

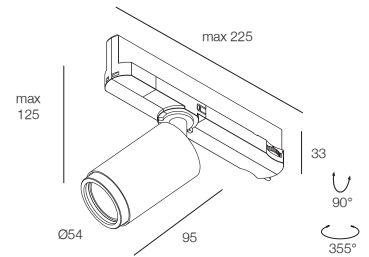

Accessories See Page 157



MX 6404-G6-830-11





Magnetic Track

/ Index



106

Armbox MT



107

Glek MT



108

Mini Glek MT



109

Magnetic Grille



110

Magnetic Grille
Adjustable



111

Magnetic Linear

Armbox MT

- Tracklight with 48V magnetic adaptor for LED Module
- Beam angle available in 20° , 40° , 60°
- SDCM 3 Step, high colour temperature stability
- Aluminium body available in 2 colours
- Separate order of remote 48V LED driver is available upon request



NEW

15°, 25°, 38° Version

MX 6387 - G7 - □ □ □ □ - □ □ □ □

Code	Driver Type
D	DALI
A	1-10V
N	Non-Dimmable


Code	CRI
8	80
9	90

Code	CCT
27	2700K
30	3000K
35	3500K
40	4000K

Code	Beam Angle
15	15°
25	25°
38	38°





Code	Colour
82	White Body & Dark Chrome Reflector
84	White Body & Chrome Reflector
86	White Body & Sandblasted Reflector
89	White Body & Rose Gold Reflector
12	Black Body & Dark Chrome Reflector
14	Black Body & Chrome Reflector
16	Black Body & Sandblasted Reflector
19	Black Body & Rose Gold Reflector

- 48V DC, 23.1W 700mA 3544lm, CRI80 COB LED Module
- 48V DC, 23.1W 700mA 2871lm, CRI90 COB LED Module

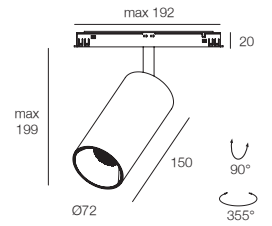

Colour			
82	84	86	89
12	14	16	19

Accessories See Page 157



Glek MT

- Tracklight with 48V magnetic adaptor for LED Module
- Beam angle available in 20°, 40°, 60°
- SDCM 3 Step, high colour temperature stability
- Aluminium body available in 2 colours
- Separate order of remote 48V LED driver is available upon request




NEW

20°, 40°, 60° Version

MX 6421 - G7 - □ □ □ □ - □ □ □ □



Code	Driver Type	Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
D	DALI	8	80	27	2700K	20	20°	82	White Body & Dark Chrome Reflector
A	1-10V	9	90	30	3000K	40	40°	84	White Body & Chrome Reflector
N	Non-Dimmable			35	3500K	60	60°	86	White Body & Sandblasted Reflector
				40	4000K			89	White Body & Rose Gold Reflector
								12	Black Bobby & Dark Chrome Reflector
								14	Black Bobby & Chrome Reflector
								16	Black Bobby & Sandblasted Reflector
								19	Black Bobby & Rose Gold Reflector

- 48V DC, 17.7W 550mA 2864lm, CRI80 COB LED Module
- 48V DC, 17.7W 550mA 2320lm, CRI90 COB LED Module



Colour			
82	84	86	89
12	14	16	19

Accessories See Page 157

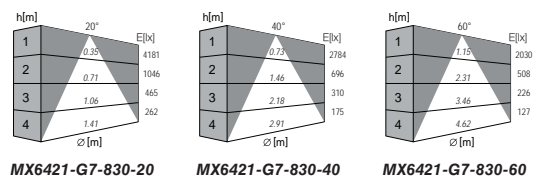

Mini Glek MT

- Tracklight with 48V magnetic adaptor for LED Module
- Beam angle available in 20°, 40°, 60°
- SDCM 3 Step, high colour temperature stability
- Aluminium body available in 2 colours
- Separate order of remote 48V LED driver is available upon request





NEW

20°, 40°, 60° Version





MX 6422 - G7 - □ □ □ □ - □ □ □ □ - □ □ □ □

Code	Driver Type	Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
D	DALI	8	80	27	2700K	20	20°	82	White Body & Dark Chrome Reflector
A	1-10V	9	90	30	3000K	40	40°	84	White Body & Chrome Reflector
N	Non-Dimmable			35	3500K	60	60°	86	White Body & Sandblasted Reflector
				40	4000K			89	White Body & Rose Gold Reflector
								12	Black Bobby & Dark Chrome Reflector
								14	Black Bobby & Chrome Reflector
								16	Black Bobby & Sandblasted Reflector
								19	Black Bobby & Rose Gold Reflector

- 48V DC, 10.9W 350mA 1894lm, CRI80 COB LED Module
- 48V DC, 10.9W 350mA 1534lm, CRI90 COB LED Module

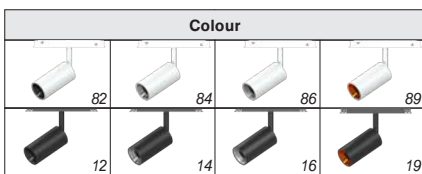

Accessories See Page 157



Magnetic Grille

- Grille light with 48V magnetic adaptor
- SDCM 3 Step, high colour temperature stability
- Aluminium body available in 2 colours
- Custom power and length upon request
- Separate order of remote 48V driver available upon request




NEW

MX 6497 - G4 - 125 - [] [] [] - [] [] - [] []

Code	Driver Type	Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
D	DALI	8	80	27	2700K	24	24°	84	White Body & Silver Reflector
A	1-10V	9	90	30	3000K	50	50°	82	White Body & Black Reflector
N	Non-Dimmable			35	3500K			14	Black Body & Silver Reflector
				40	4000K			12	Black Body & Black Reflector

- 3.6W 100mA, 6 x 0.6W 500lm, CRI80 SMD LED
- 3.6W 100mA, 6 x 0.6W 433lm, CRI90 SMD LED




NEW

MX 6497 - G4 - 245 - [] [] [] - [] [] - [] []

Code	Driver Type	Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
D	DALI	8	80	27	2700K	24	24°	84	White Body & Silver Reflector
A	1-10V	9	90	30	3000K	50	50°	82	White Body & Black Reflector
N	Non-Dimmable			35	3500K			14	Black Body & Silver Reflector
				40	4000K			12	Black Body & Black Reflector

- 7.2W 200mA, 12 x 0.6W 1000lm, CRI80 SMD LED
- 7.2W 200mA, 12 x 0.6W 866lm, CRI90 SMD LED



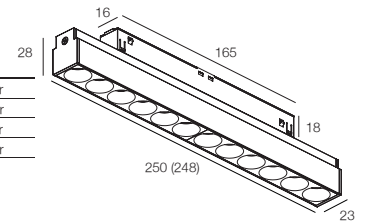


NEW

MX 6497 - G4 - 365 - [] [] [] - [] [] - [] []

Code	Driver Type	Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
D	DALI	8	80	27	2700K	24	24°	84	White Body & Silver Reflector
A	1-10V	9	90	30	3000K	50	50°	82	White Body & Black Reflector
N	Non-Dimmable			35	3500K			14	Black Body & Silver Reflector
				40	4000K			12	Black Body & Black Reflector

- 10.8W 300mA, 18 x 0.6W 1500lm, CRI80 SMD LED
- 10.8W 300mA, 18 x 0.6W 1300lm, CRI90 SMD LED

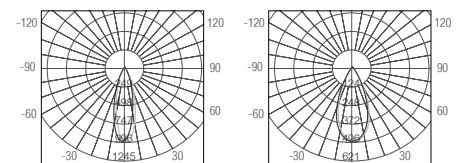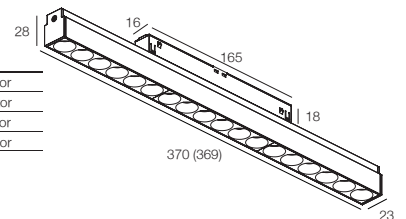

MX 6497-G4-125-830-24

MX 6497-G4-125-830-50

Magnetic Grille Adjustable

- Grille light with 48V magnetic adaptor
- SDCM 3 Step, high colour temperature stability
- Adjustable version
- Aluminium body available in 2 colours
- Custom power and length upon request
- Separate order of remote 48V driver available upon request




NEW

MX 6499 - G4 - 110 - [] [] [] - [] [] - [] []

Code	Driver Type	Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
D	DALI	8	80	27	2700K	24	24°	82	White Body & Black Reflector
A	1-10V	9	90	30	3000K	50	50°	12	Black Body & Black Reflector
N	Non-Dimmable			35	3500K				
				40	4000K				

- 5.6W 150mA, 6 x 0.94W 714lm, CRI80 SMD LED
- 5.6W 150mA, 6 x 1W 618lm, CRI90 SMD LED






NEW

MX 6499 - G4 - 220 - [] [] [] - [] [] - [] []

Code	Driver Type	Code	CRI	Code	CCT	Code	Beam Angle	Code	Colour
D	DALI	8	80	27	2700K	24	24°	82	White Body & Black Reflector
A	1-10V	9	90	30	3000K	50	50°	12	Black Body & Black Reflector
N	Non-Dimmable			35	3500K				
				40	4000K				

- 11.2W 300mA, 12 x 0.94W 1430lm, CRI80 SMD LED
- 11.2W 300mA, 12 x 0.94W 1240lm, CRI90 SMD LED

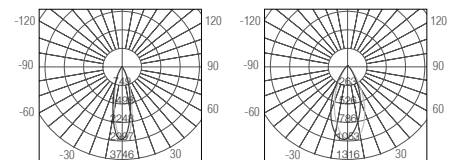

MX6499-G4-220-830-24

MX6499-G4-220-830-50

Magnetic Linear

- Linear light with 48V magnetic adaptor
- SDCM 3 Step, high colour temperature stability
- Aluminium body available in 2 colours
- Custom power and length upon request
- Separate order of remote 48V LED driver is available upon request




NEW

MX 6496 - G4 - 600 - [] [] [] [] - [] []

Code	Driver Type	Code	CRI	Code	CCT	Code	Colour
D	DALI	8	80	27	2700K	80	White
A	1-10V	9	90	30	3000K	10	Black
N	Non-Dimmable			35	3500K		
				40	4000K		

- 10.2W 300mA 1620lm, CRI90 SMD LED
- 10.2W 300mA 1400lm, CRI90 SMD LED






NEW

MX 6496 - G4 - 1200 - [] [] [] [] - [] []

Code	Driver Type	Code	CRI	Code	CCT	Code	Colour
D	DALI	8	80	27	2700K	80	White
A	1-10V	9	90	30	3000K	10	Black
N	Non-Dimmable			35	3500K		
				40	4000K		

- 20.4W 600mA 3240lm, CRI90 SMD LED
- 20.4W 600mA 2800lm, CRI90 SMD LED

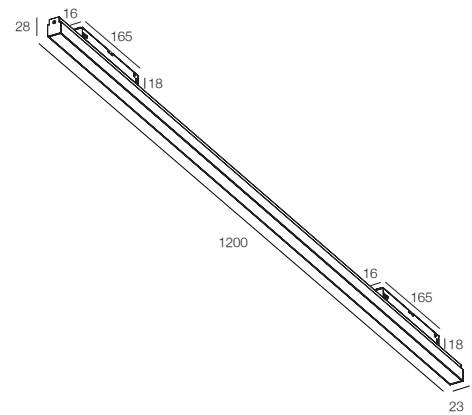

MX 6496-G4-600-830


Magnetic Track Accessory



Magnetic Track A - Surface Mounted

AP - KH M20A - -


Code	Type	Code	Colour
10	1000mm	B	Black
20	2000mm	W	White



L connector (Horizontal Direction) for Magnetic Track A

AP - KH M211 - 20A -


Code	Colour
B	Black
W	White



Magnetic Track B - Trimless Recessed

AP - KH M20B - -


Code	Type	Code	Colour
10	1000mm	B	Black
20	2000mm	W	White



L connector (Horizontal Direction) for Magnetic Track B

AP - KH M211 - 20B -


Code	Colour
B	Black
W	White



Magnetic Track C - Trimless Recessed

AP - KH M20C - -


Code	Type	Code	Colour
10	1000mm	B	Black
20	2000mm	W	White



L connector (Horizontal Direction) for Magnetic Track C

AP - KH M211 - 20C -


Code	Colour
B	Black
W	White



Magnetic Track D - Trimless Recessed

AP - KH M20D - -


Code	Type	Code	Colour
10	1000mm	B	Black
20	2000mm	W	White




L connector (Horizontal Direction) for Magnetic Track D

AP - KH M211 - 20D -


Code	Colour
B	Black
W	White



Magnetic Track - Power Connector (With wire)

AP - KH M312 - G2 - 


Code	Colour
B	Black
W	White



Magnetic Track - Power Connector (Dubble)

AP - KH M313 - 


Code	Colour
B	Black
W	White



Magnetic Track - Joiner Connector

AP - KH M316 - 


Code	Colour
B	Black
W	White



End Cap

AP - KH M317 - 


Code	Colour
B	Black
W	White



Magnetic Track - Suspension Kits

AP - KH M391 - 


Code	Colour
B	Black
W	White



Magnetic Track - Connector Bracket

AP - KH M392 - 


Code	Colour
B	Black
W	White



48V DC Transformer

EC LED-48V-200-MW(34)

- 48V DC 200W Electronic transformer, provide with wiring box
- Other power output at 48V DC transformer is available on request





Troffer & Profile System

/ Index



118

Line 40



119

Line 60



120

Line 80



121

DIP

Tunable White
(Anti Glare Microfilm
with Air Slot Version)



122

DIP

(Diffuser Version)



123

DIP

(Diffuser with
Air Slot Version)



124

DIP

(Anti Glare
Microfilm Version)



125

DIP

(Anti Glare Microfilm
with Air Slot Version)



126

DIP

(Metal Mesh
Hole Version)



127

DIP

(Metal Mesh Hole
with Air Slot Version)



128

S-Extal G3



129

B-Extal



130

B-Extal
Tunable White


Insider Focal

DIP

Next Generation Green Lighting in Office

DIP LED Panel emits both direct and indirect illumination to maximise staff comfort with uniform light distribution in an office and commercial environment. With impressive visual comfort and dimming possibilities, DIP LED Panel can save up to 70% energy comparing to traditional T5 fluorescent.


The diffuser incorporates an innovative micro film that optimizes the control of beam angles and minimizes glare, so that a low Unified Glare Ratio can be achieved.

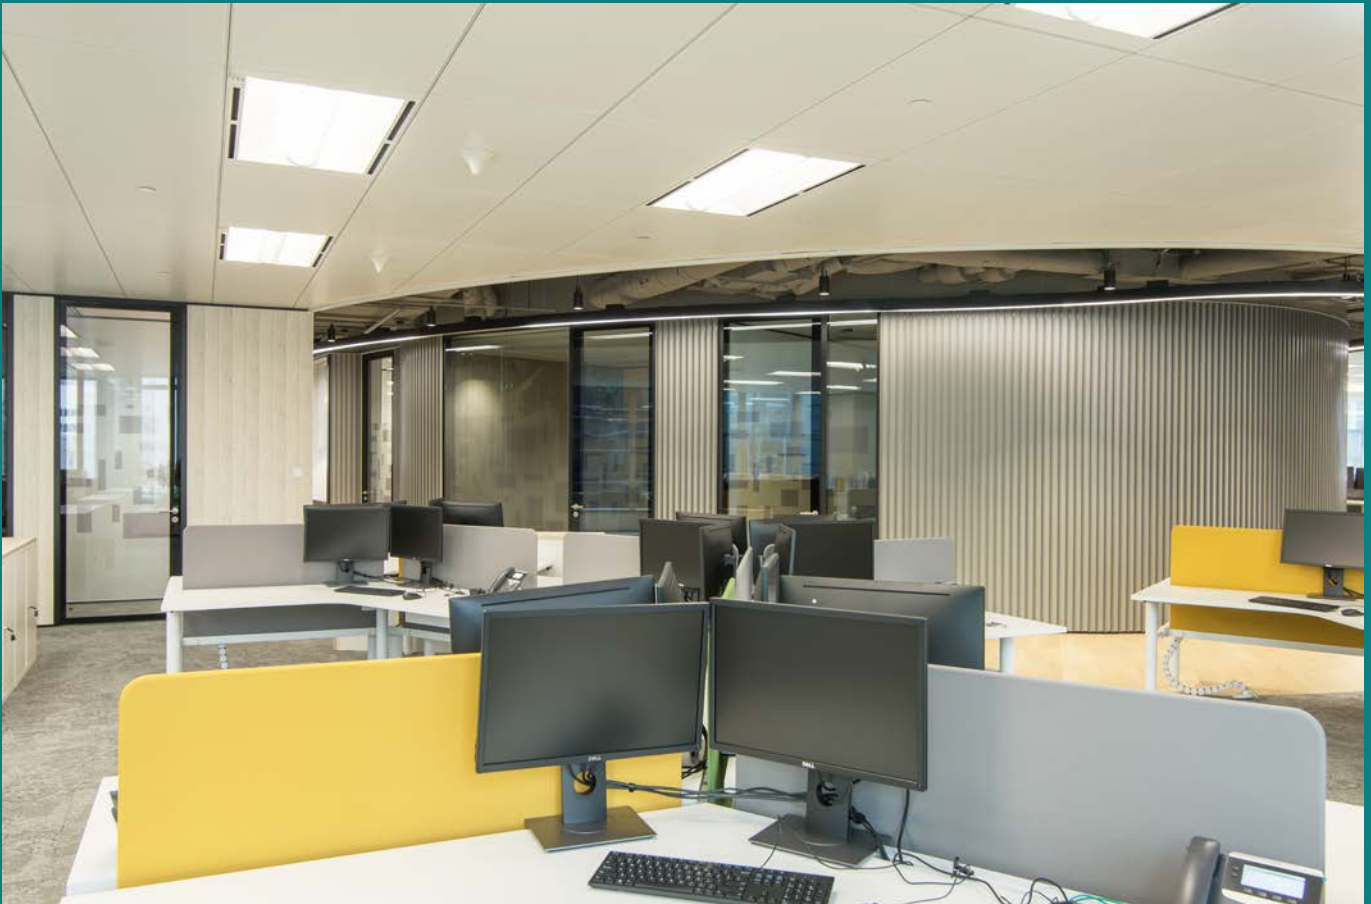



Powered by Philips Fortimo LED Module
(High Efficiency)

High Light
transmission diffuser





Diffuser with Anti-Glare Film

Indirect Swing for comfort and
soft illumination without hotspot

Integrate emergency
power pack (Optional)

Line 40

- LED system in extrusion aluminium body
- Frosted White Polycarbonate diffuser
- Custom length available
- Provided with mounting accessories
- Integrated LED Driver
- Custom size upon request

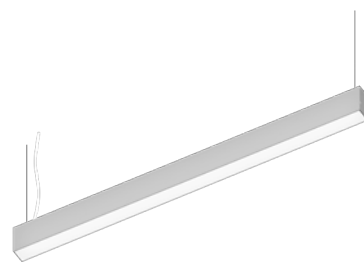


NEW

MX 5520D9P - G2 - 600 - [] [] [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		

- 14W 400mA 2496lm, CRI80, SMD LED, Integrated LED Driver
- 14W 400mA 2112lm, CRI90, SMD LED, Integrated LED Driver

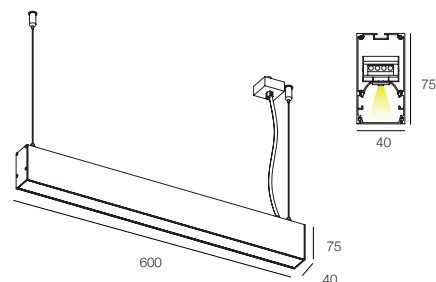


NEW

MX 5520D9P - G2 - 900 - [] [] [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		

- 21W 600mA 3744lm, CRI80, SMD LED, Integrated LED Driver
- 21W 600mA 3168lm, CRI90, SMD LED, Integrated LED Driver



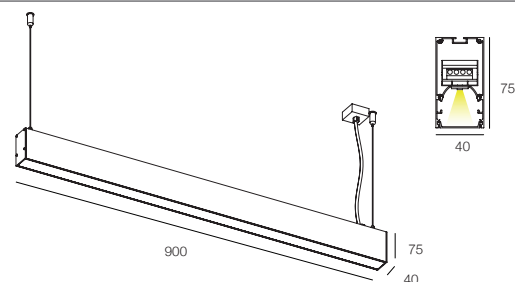


NEW

MX 5520D9P - G2 - 1200 - [] [] [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		

- 28.1W 800mA 4992lm, CRI80, SMD LED, Integrated LED Driver
- 28.1W 800mA 4224lm, CRI90, SMD LED, Integrated LED Driver

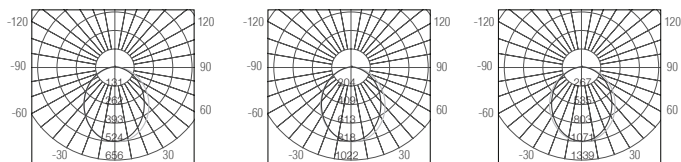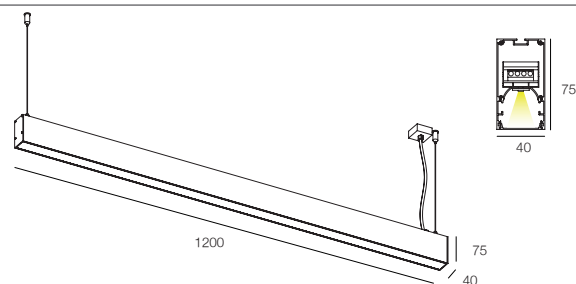

MX 5520D9P-600-830

MX 5520D9P-900-830

MX 5520D9P-1200-830

Accessory

Mounting Accessories included in each set





Automatic suspension x 4pcs with 1500mm wire



Cable base with 3 x 0.75mm² cable, 1500mm in length
5 x 0.75mm² version for 2 circuits available on request

Line 60

- LED system in extrusion aluminium body
- Frosted White Polycarbonate diffuser
- Custom length available
- Provided with mounting accessories
- Integrated LED Driver
- Custom size upon request




NEW

MX 5521D9P - G2 - 600 - [] - [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		

- 13.6W 400mA 2527lm, CRI80, SMD LED, Integrated LED Driver
- 13.6W 400mA 2138lm, CRI90, SMD LED, Integrated LED Driver

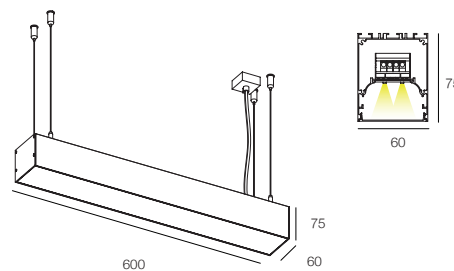


NEW

MX 5521D9P - G2 - 900 - [] - [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		

- 20.4W 600mA 3791lm, CRI80, SMD LED, Integrated LED Driver
- 20.4W 600mA 3208lm, CRI90, SMD LED, Integrated LED Driver



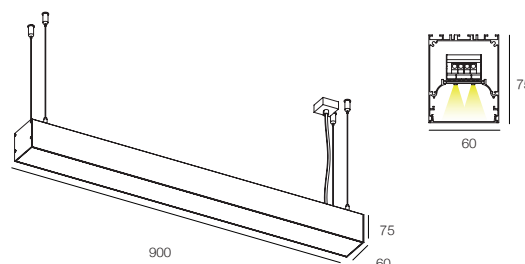


NEW

MX 5521D9P - G2 - 1200 - [] - [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		

- 27.2W 800mA 5054lm, CRI80, SMD LED, Integrated LED Driver
- 27.2W 800mA 4277lm, CRI90, SMD LED, Integrated LED Driver

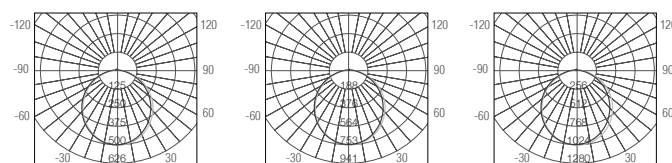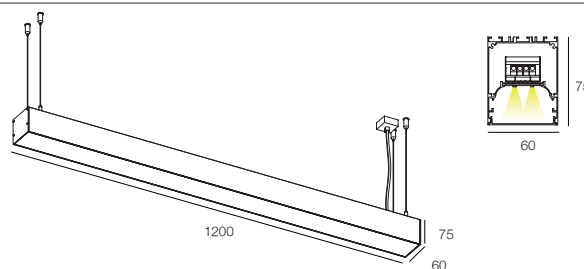

MX 5521D9P-600-830

MX 5521D9P-900-830

MX 5521D9P-1200-830

Accessory

Mounting Accessories included in each set





Automatic suspension x 4pcs with 1500mm wire



Cable base with 3 x 0.75mm² cable, 1500mm in length
5 x 0.75mm² version for 2 circuits available on request

Line 80

- LED system in extrusion aluminium body
- Frosted White Polycarbonate diffuser
- Custom length available
- Provided with mounting accessories
- Integrated LED Driver
- Custom size upon request

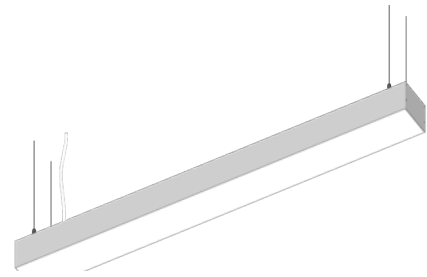


NEW

MX 5522D9P - G2 - 600 - [] [] [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		

- 13.2W 400mA 2106lm, CRI80, SMD LED, Integrated LED Driver
- 13.2W 400mA 1782lm, CRI90, SMD LED, Integrated LED Driver

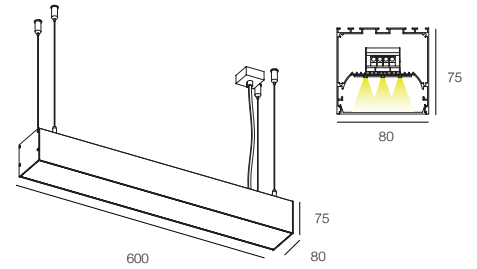


NEW

MX 5522D9P - G2 - 900 - [] [] [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		

- 19.9W 600mA 3159lm, CRI80, SMD LED, Integrated LED Driver
- 19.9W 600mA 2673lm, CRI90, SMD LED, Integrated LED Driver



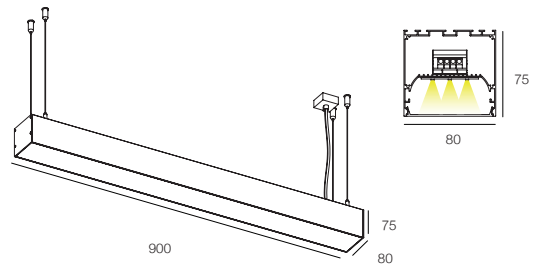


NEW

MX 5522D9P - G2 - 1200 - [] [] [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		

- 26.5W 800mA 4212lm, CRI80, SMD LED, Integrated LED Driver
- 26.5W 800mA 3564lm, CRI90, SMD LED, Integrated LED Driver

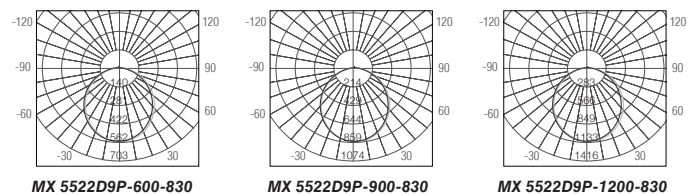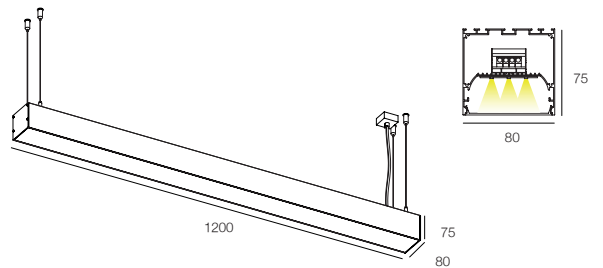

Accessory

Mounting Accessories included in each set



Automatic suspension x 4pcs with 1500mm wire




Cable base with 3 x 0.75mm² cable, 1500mm in length
5 x 0.75mm² version for 2 circuits available on request

DIP Tunable White (Anti Glare Microfilm with Air Slot Version)

- Direct and indirect lighting concept, soft lighting effect for office setting
- CRI90, 3000K/ 3500K/ 4000K options
- Mesh hole metal front plate
- SCDM Step 3, high colour temperature stability
- Zhaga-Comply LED product
- Custom size upon request
- Integrated LED driver

* CIC version only available on CRI 90





NEW

DIP 595 x 595mm

MX 7496AS - G6 - TW - W - 80
MX 7496AS - G6 - TW - W - 80EB (for Emergency Power Pack)

Code	Driver Type	Code	LED Module
D	DALI	11	11.3W 350mA 2030lm (2700K)
A	1-10V		11.3W 350mA 2198lm (6500K)
N	Non-Dimmable	16	16.3W 500mA 2900lm (2700K)
			16.3W 500mA 3140lm (6500K)

Philips LED Module, Integrated Driver

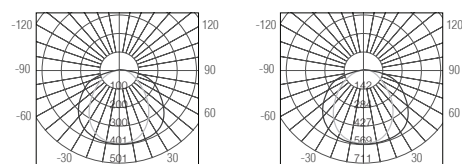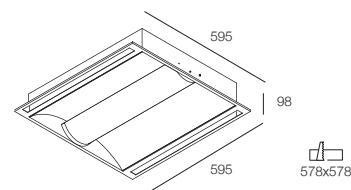

MX 7496AS-G6-DTW-11W-80 MX 7496AS-G6-DTW-17W-80



NEW

DIP 1195 x 595mm

MX 7497AS - G6 - TW - W - 80
MX 7497AS - G6 - TW - W - 80EB (for Emergency Power Pack)

Code	Driver Type	Code	LED Module
D	DALI	23	22.8W 700mA 4060lm (2700K)
A	1-10V		22.8W 700mA 4396lm (6500K)
N	Non-Dimmable	33	32.5W 1000mA 5800lm (2700K)
			32.5W 1000mA 6280lm (6500K)

Philips LED Module, Integrated Driver

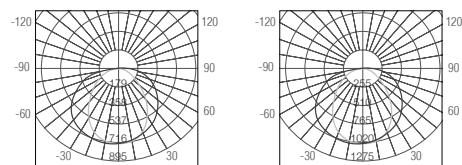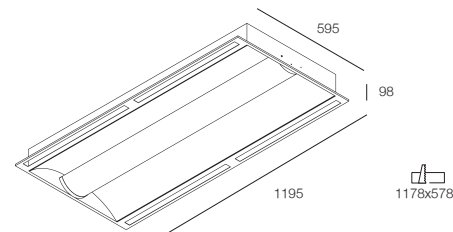


MX 7497AS-G6-DTW-23W-80 MX 7497AS-G6-DTW-33W-80

Accessory

Air Slot Cover Plate

MX AS - 600
Length 591mm

MX AS - 1200
Length 1191mm



Emergency Power Pack

Ordering Code	Matching With	Specification
EC EK-LED020-K2	For MX 7496AS - ...- .. W - 80 EB	180mA, 2hrs, 980lm. Full set will be integrated in DIP
EC EK-LED021-K2	For MX 7497AS - ...- .. W - 80 EB	360mA, 2hrs, 1900lm. Full set will be integrated in DIP


DIP (Diffuser Version)

- Direct and indirect lighting concept, soft lighting effect for office setting
- CRI90, 3000K/ 3500K/ 4000K options
- Milky White Polycarbonate diffuser with glow wire test ready, high lighting transmission
- SCDM Step 3, high colour temperature stability
- Zhaga-Comply LED product
- Custom size upon request
- Integrated LED driver

* CIC version only available on CRI 90



Diffuser with Line Pattern





DIP 595 x 595mm

MX 7398 - G6 - [] [] [] [] - [] [] W - 80


MX 7398 - G6 - [] [] [] [] - [] [] W - 80EB (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	11	11.3W 350mA 2140lm
A	1-10V	9	90	35	3500K	17	16.5W 500mA 3058lm
N	Non-Dimmable			40	4000K		

[] Philips LED Module, Integrated Driver

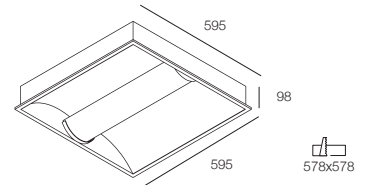

MX 7398-G6-840-11W-80



MX 7398-G6-840-17W-80



DIP 1195 x 595mm

MX 7399 - G6 - [] [] [] [] - [] [] W - 80


MX 7399 - G6 - [] [] [] [] - [] [] W - 80EB (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	23	23W 700mA 4280lm
A	1-10V	9	90	35	3500K	33	33.3W 1000mA 6116lm
N	Non-Dimmable			40	4000K		

[] Philips LED Module, Integrated Driver

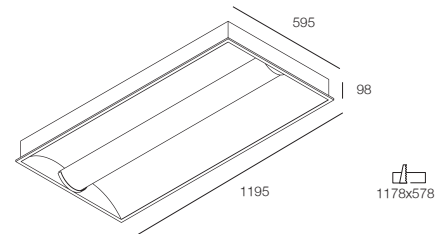

MX 7399-G6-840-23W-80



MX 7399-G6-840-32W-80

Emergency Power Pack

Ordering Code	Matching With	Specification
EC EK-LED020-K2	For MX 7398 - W - 80 EB	180mA, 2hrs, 980lm. Full set will be integrated in DIP
EC EK-LED021-K2	For MX 7399 - W - 80 EB	360mA, 2hrs, 1900lm. Full set will be integrated in DIP


DIP (Diffuser with Air Slot Version)

- Direct and indirect lighting concept, soft lighting effect for office setting
- CRI90, 3000K/ 3500K/ 4000K options
- Milky White Polycarbonate diffuser with glow wire test ready, high lighting transmission
- SCDM Step 3, high colour temperature stability
- Zhaga-Comply LED product
- Custom size upon request
- Integrated LED driver

* CIC version only available on CRI 90



Diffuser with Line Pattern





DIP 595 x 595mm

MX 7398AS - G6 - [] [] [] [] - [] [] **W - 80**
MX 7398AS - G6 - [] [] [] [] - [] [] **W - 80EB** (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	11	11.3W 350mA 2140lm
A	1-10V	9	90	35	3500K	17	16.5W 500mA 3058lm
N	Non-Dimmable			40	4000K		

[] Philips LED Module, Integrated Driver

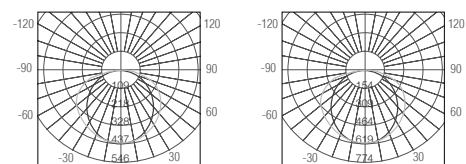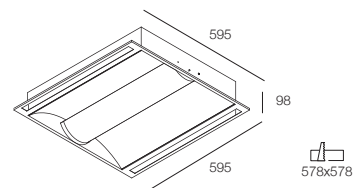



MX 7398AS-G6-840-11W-80 **MX 7398AS-G6-840-17W-80**

DIP 1195 x 595mm

MX 7399AS - G6 - [] [] [] [] - [] [] **W - 80**
MX 7399AS - G6 - [] [] [] [] - [] [] **W - 80EB** (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	23	23W 700mA 4280lm
A	1-10V	9	90	35	3500K	33	33.3W 1000mA 6116lm
N	Non-Dimmable			40	4000K		

[] Philips LED Module, Integrated Driver

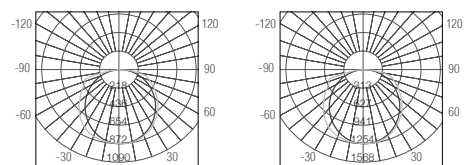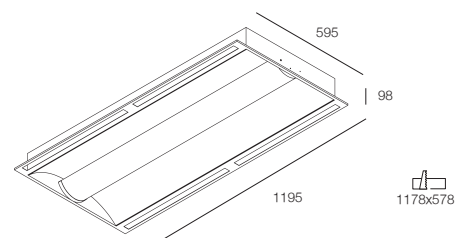


MX 7399AS-G6-840-23W-80 **MX 7399AS-G6-840-33W-80**

Accessory

Air Slot Cover Plate

MX AS - 600
Length 591mm

MX AS - 1200
Length 1191mm



Emergency Power Pack

Ordering Code	Matching With	Specification
EC EK-LED020-K2	For MX 7398AS - W - 80 EB	180mA, 2hrs, 980lm. Full set will be integrated in DIP
EC EK-LED021-K2	For MX 7399AS - W - 80 EB	360mA, 2hrs, 1900lm. Full set will be integrated in DIP


DIP (Anti Glare Microfilm Version)

- Direct and indirect lighting concept, soft lighting effect for office setting
- CRI90, 3000K/ 3500K/ 4000K options
- Anti glare microfilm applied to reduce overall UGR
- SCDM Step 3, high colour temperature stability
- Zhaga-Comply LED product
- Custom size upon request
- Integrated LED driver

* CIC version only available on CRI 90



Diffuser with Anti-Glare Film





DIP 595 x 595mm

MX 7496 - G6 - [] - [] - [] W - 80


MX 7496 - G6 - [] - [] - [] W - 80EB (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	11	11.3W 350mA 2140lm
A	1-10V	9	90	35	3500K	17	16.5W 500mA 3058lm
N	Non-Dimmable			40	4000K		

[] Philips LED Module, Integrated Driver

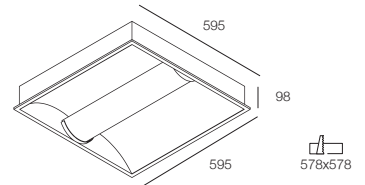

MX 7496-G6-840-11W-80



MX 7496-G6-840-17W-80



DIP 1195 x 595mm

MX 7497 - G6 - [] - [] - [] W - 80


MX 7497 - G6 - [] - [] - [] W - 80EB (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	23	23W 700mA 4280lm
A	1-10V	9	90	35	3500K	33	33.3W 1000mA 6116lm
N	Non-Dimmable			40	4000K		

[] Philips LED Module, Integrated Driver

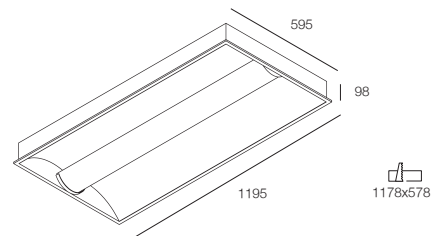

MX 7497-G6-840-23W-80



MX 7497-G6-840-33W-80


Emergency Power Pack

Ordering Code	Matching With	Specification
EC EK-LED020-K2	For MX 7496 - W - 80 EB	180mA, 2hrs, 980lm. Full set will be integrated in DIP
EC EK-LED021-K2	For MX 7497 - W - 80 EB	360mA, 2hrs, 1900lm. Full set will be integrated in DIP

DIP (Anti Glare Microfilm with Air Slot Version)

- Direct and indirect lighting concept, soft lighting effect for office setting
- CRI90, 3000K/ 3500K/ 4000K options
- Anti glare microfilm apply to reduce overall UGR
- SCDM Step 3, high colour temperature stability
- Zhaga-Comply LED product
- Custom size upon request
- Integrated LED driver

* CIC version only available on CRI 90





Diffuser with Anti-Glare Film

DIP 595 x 595mm

MX 7496AS - G6 - [] [] [] [] - [] [] **W - 80**
MX 7496AS - G6 - [] [] [] [] - [] [] **W - 80EB** (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	11	11.3W 350mA 2140lm
A	1-10V	9	90	35	3500K	17	16.5W 500mA 3058lm
N	Non-Dimmable			40	4000K		

[] Philips LED Module, Integrated Driver

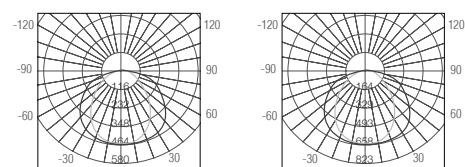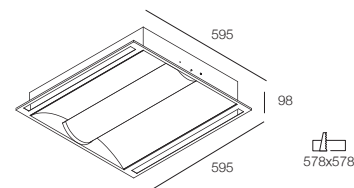



MX 7496AS-G6-840-11W-80 **MX 7496AS-G6-840-17W-80**

DIP 1195 x 595mm

MX 7497AS - G6 - [] [] [] [] - [] [] **W - 80**
MX 7497AS - G6 - [] [] [] [] - [] [] **W - 80EB** (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	23	23W 700mA 4280lm
A	1-10V	9	90	35	3500K	33	33.3W 1000mA 6116lm
N	Non-Dimmable			40	4000K		

[] Philips LED Module, Integrated Driver

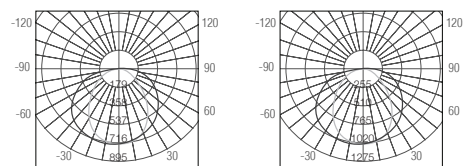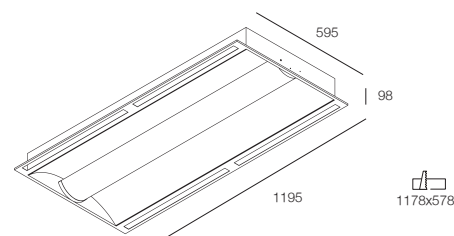


MX 7497AS-G6-840-23W-80 **MX 7497AS-G6-840-33W-80**

Accessory

Air Slot Cover Plate

MX AS - 600
Length 591mm

MX AS - 1200
Length 1191mm



Emergency Power Pack

Ordering Code	Matching With	Specification
EC EK-LED020-K2	For MX 7496AS - W - 80 EB	180mA, 2hrs, 980lm. Full set will be integrated in DIP
EC EK-LED021-K2	For MX 7497AS - W - 80 EB	360mA, 2hrs, 1900lm. Full set will be integrated in DIP


DIP (Metal Mesh Hole Version)

- Direct and indirect lighting concept, soft lighting effect for office setting
- CRI90, 3000K/ 3500K/ 4000K options
- Mesh hole metal front plate
- SCDM Step 3, high colour temperature stability
- Zhaga-Comply LED product
- Custom size upon request
- Integrated LED driver

* CIC version only available on CRI 90



Metal Mesh Hole





DIP 595 x 595mm

MX 7498 - G6 - [] [] [] [] - [] [] W - 80


MX 7498 - G6 - [] [] [] [] - [] [] W - 80EB (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	11	11.3W 350mA 2140lm
A	1-10V	9	90	35	3500K	17	16.5W 500mA 3058lm
N	Non-Dimmable			40	4000K		

[] Philips LED Module, Integrated Driver



MX 7498-G6-840-11W-80



MX 7498-G6-840-17W-80



DIP 1195 x 595mm

MX 7499 - G6 - [] [] [] [] - [] [] W - 80


MX 7499 - G6 - [] [] [] [] - [] [] W - 80EB (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	23	23W 700mA 4280lm
A	1-10V	9	90	35	3500K	33	33.3W 1000mA 6116lm
N	Non-Dimmable			40	4000K		

[] Philips LED Module, Integrated Driver

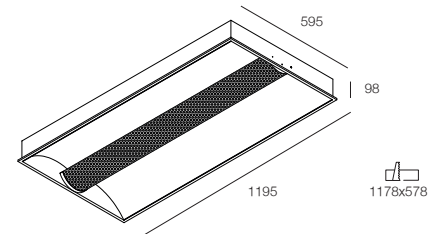

MX 7499-G6-840-23W-80



MX 7499-G6-840-33W-80

Emergency Power Pack

Ordering Code	Matching With	Specification
EC EK-LED020-K2	For MX 7498 - W - 80 EB	180mA, 2hrs, 980lm. Full set will be integrated in DIP
EC EK-LED021-K2	For MX 7499 - W - 80 EB	360mA, 2hrs, 1900lm. Full set will be integrated in DIP


DIP (Metal Mesh Hole with Air Slot Version)

- Direct and indirect lighting concept, soft lighting effect for office setting
- CRI90, 3000K/ 3500K/ 4000K options
- Mesh hole metal front plate
- SCDM Step 3, high colour temperature stability
- Zhaga-Comply LED product
- Custom size upon request
- Integrated LED driver

* CIC version only available on CRI 90



Metal Mesh Hole





DIP 595 x 595mm

MX 7498AS - G6 - - **W - 80**
MX 7498AS - G6 - - **W - 80EB** (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	11	11.3W 350mA 2140lm
A	1-10V	9	90	35	3500K	17	16.5W 500mA 3058lm
N	Non-Dimmable			40	4000K		

***** Philips LED Module, Integrated Driver

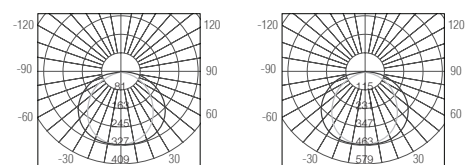



MX 7498AS-G6-840-11W-80 **MX 7498AS-G6-840-17W-80**

DIP 1195 x 595mm

MX 7499AS - G6 - - **W - 80**
MX 7499AS - G6 - - **W - 80EB** (for Emergency Power Pack)

Code	Driver Type	Code	CRI	Code	CCT	Code	LED Module
D	DALI	8	80	30	3000K	23	23W 700mA 4280lm
A	1-10V	9	90	35	3500K	33	33.3W 1000mA 6116lm
N	Non-Dimmable			40	4000K		

***** Philips LED Module, Integrated Driver

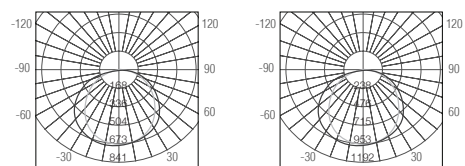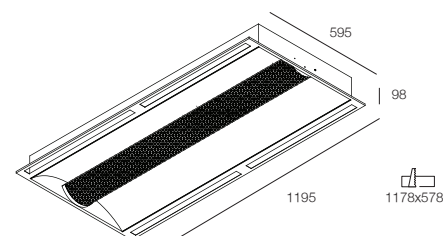


MX 7499AS-G6-840-23W-80 **MX 7499AS-G6-840-33W-80**

Accessory

Air Slot Cover Plate

MX AS - 600
Length 591mm

MX AS - 1200
Length 1191mm




Emergency Power Pack

Ordering Code	Matching With	Specification
EC EK-LED020-K2	For MX 7498AS - W - 80 EB	180mA, 2hrs, 980lm. Full set will be integrated in DIP
EC EK-LED021-K2	For MX 7499AS - W - 80 EB	360mA, 2hrs, 1900lm. Full set will be integrated in DIP

S-Extal G3


- LED system in extrusion aluminium body
- Polycarbonate diffuser
- Custom length available
- Provided with mounting accessories
- Integrated LED Driver
- Custom size upon request



MX 5508D9P - G3 - 600 - [] - [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		


- 12.2W 600mA 1856lm, CRI80, SMD LED, Integrated LED Driver
- 12.2W 600mA 1591lm, CRI90, SMD LED, Integrated LED Driver

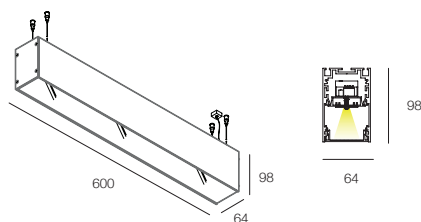

MX 5508D9P - G3 - 900 - [] - [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		




- 18.3W 900mA 2785lm, CRI80, SMD LED, Integrated LED Driver
- 18.3W 900mA 2356lm, CRI90, SMD LED, Integrated LED Driver

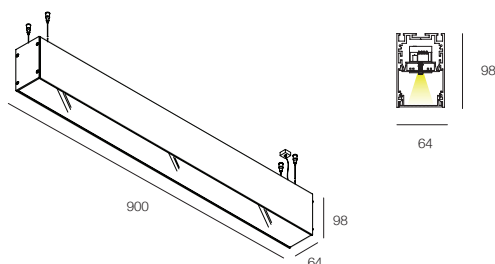

MX 5508D9P - G3 - 1200 - [] - [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		

- 24.4W 1200mA 3713lm, CRI80, SMD LED, Integrated LED Driver
- 24.4W 1200mA 3142lm, CRI90, SMD LED, Integrated LED Driver

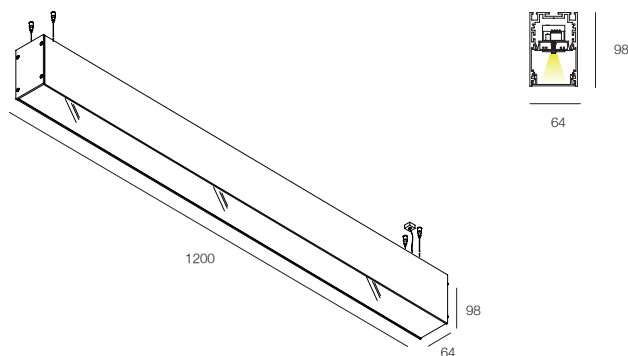

MX 5508D9P-G3-600

Accessory

Mounting Accessories included in each set




Automatic suspension x 4pcs with 1500mm wire



Cable base with 3 x 0.75mm² cable, 1500mm in length
5 x 0.75mm² version for 2 circuits available on request

B-Extal


- LED system in extrusion aluminium body
- Frosted White Polycarbonate diffuser
- Custom length available
- Provided with mounting accessories
- Integrated LED Driver
- Custom size upon request



MX 5510D9P - G3 - 600 - [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		


- 12.2W 600mA 1856lm, CRI80, SMD LED, Integrated LED Driver
- 12.2W 600mA 1571lm, CRI90, SMD LED, Integrated LED Driver

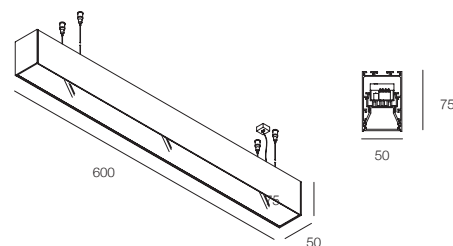

MX 5510D9P - G3 - 900 - [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		




- 18.3W 900mA 2785lm, CRI80, SMD LED, Integrated LED Driver
- 18.3W 900mA 2356lm, CRI90, SMD LED, Integrated LED Driver

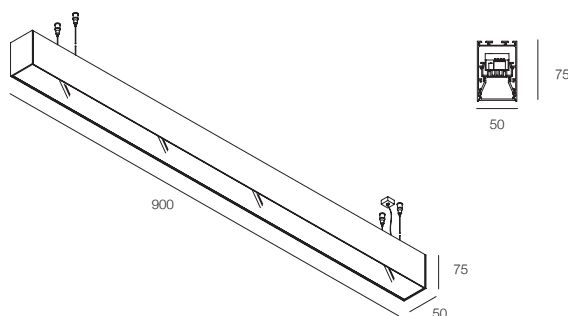

MX 5510D9P - G3 - 1200 - [] - []

Code	CRI	Code	CCT	Code	Aluminium Housing Colour
8	80	27	2700K	B	Black Body
9	90	30	3000K	W	White Body
		35	3500K		
		40	4000K		

- 24.4W 1200mA 3713lm, CRI80, SMD LED, Integrated LED Driver
- 24.4W 1200mA 3142lm, CRI90, SMD LED, Integrated LED Driver

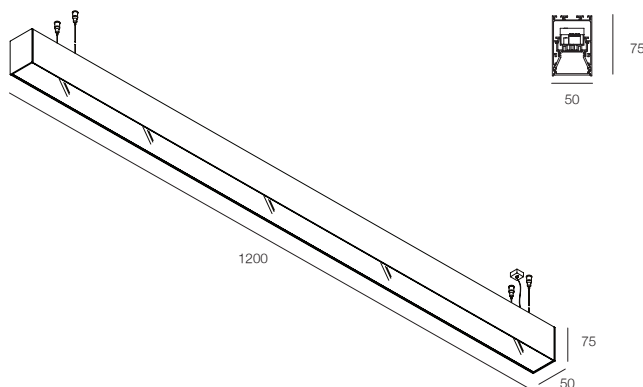

MX 5510D9P-G3-600

Accessory

Mounting Accessories included in each set



Automatic suspension x 4pcs with 1500mm wire



Cable base with 3 x 0.75mm² cable, 1500mm in length
5 x 0.75mm² version for 2 circuits available on request

B-Extal Tunable White


- LED system in extrusion aluminium body
- Frosted White Polycarbonate diffuser
- Custom length available
- Provided with mounting accessories
- Integrated LED Driver
- Custom size upon request



MX 5510D9P - G3 - TW - 600 - □

Code	Aluminium Housing Colour
B	Black Body
W	White Body


- 12.2W 600mA 1856lm, CRI80, SMD LED, Integrated LED Driver
- 12.2W 600mA 1571lm, CRI90, SMD LED, Integrated LED Driver

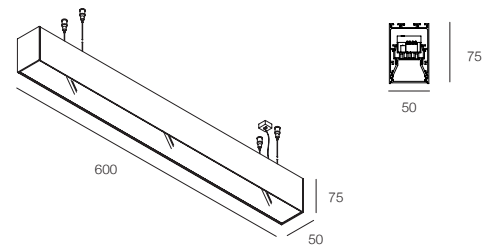

MX 5510D9P - G3 - TW - 900 - □

Code	Aluminium Housing Colour
B	Black Body
W	White Body




- 18.3W 900mA 2785lm, CRI80, SMD LED, Integrated LED Driver
- 18.3W 900mA 2356lm, CRI90, SMD LED, Integrated LED Driver

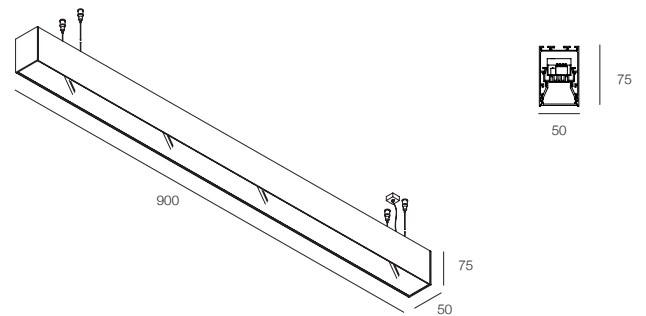

MX 5510D9P - G3 - TW - 1200 - □

Code	Aluminium Housing Colour
B	Black Body
W	White Body

- 24.4W 1200mA 3713lm, CRI80, SMD LED, Integrated LED Driver
- 24.4W 1200mA 3142lm, CRI90, SMD LED, Integrated LED Driver

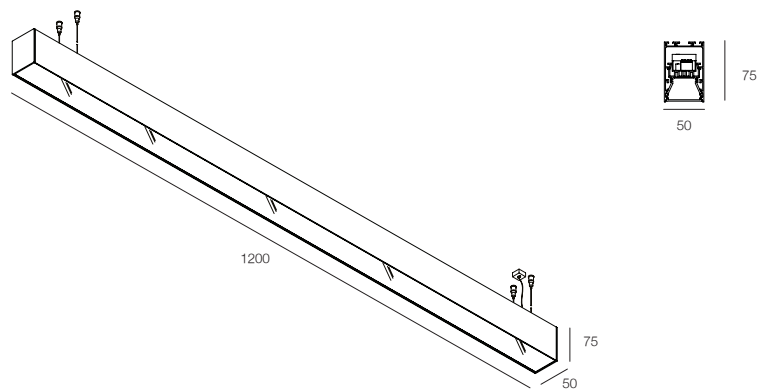

MX 5510D9P-G3-TW-600

Accessory

Mounting Accessories included in each set




Automatic suspension x 4pcs with 1500mm wire



Cable base with 3 x 0.75mm² cable, 1500mm in length
5 x 0.75mm² version for 2 circuits available on request

Profile System Design

Parts & Accessories

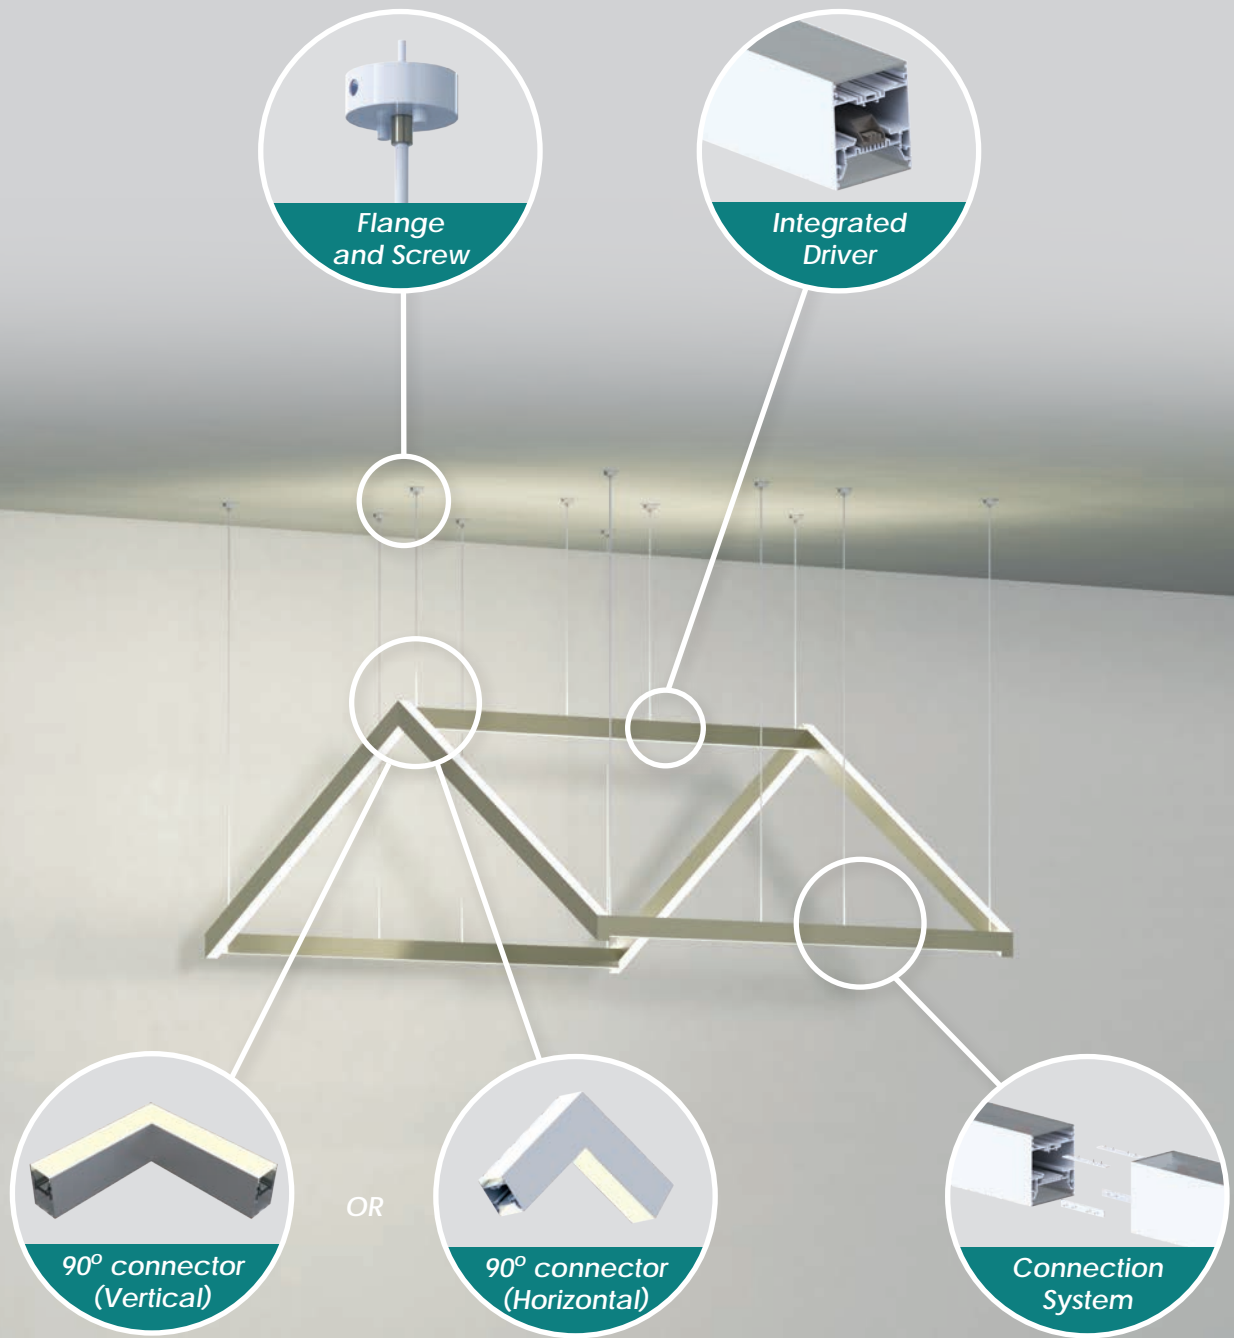




MR16 LED Retrofit

/ Index



134

Master




135

Multi Cage




136

Tracfit




137

Glee




137

Glee Wallwasher




139

Glee Spot




140

Pin Hole




141

Pin Slot




142

Space




143

Atec




144

Renia




145

Mini Trim




146

Mini Trim Sq




147

Pin Hole Sq




148

Multi Mini AT




149

Multi Mini Trimless
AT



150

Multi Super Mini



151

Multi Super Mini
Trimless



152

Cybox Mini



153

Multi Box Mini AT

Master

- Recessed downlight for MR16
- Aluminium trim available in 2 colours options
- Tilting and rotation allowed
- Polycarbonate reflector with 2 colours options
- Separate order of electronic transformer available upon request



NEW




Adjustable Version

MX 5472 - M -

Code	Colour
82	White Trim & Dark Chrome Reflector
84	White Trim & Chrome Reflector
12	Black Trim & Dark Chrome Reflector
14	Black Trim & Chrome Reflector

1 x GU 5.3 LED Retrofit MR16



NEW






Adjustable Trimless Version


MX 5473 - M -

Code	Ceiling Height	Code	Colour
H	20	82	White Installation Kit & Dark Chrome Reflector
L	12	84	White Installation Kit & Chrome Reflector

1 x GU 5.3 LED Retrofit MR16



Accessories See Page 156



Multi Cage

- Surface mounted downlight for MR16
- Aluminium housing and metal body available in different colours
- Integrated electronic transformer




NEW



MX 9157S - M - [] [] []

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body

1 x GU 5.3 LED Retrofit MR16





NEW




MX 9157D - M - [] [] []

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body

2 X 1 x GU 5.3 LED Retrofit MR16



Accessories See Page 156



Tracfit

- Tracklight with 3-phase adaptor for MR16
- Aluminium body available in 2 colours
- Surface mounted version available upon request
- Integrated electronic transformer



NEW





Adjustable Version


MX 6840 - M -

Code	Colour
80	White
10	Black

 1 x GU 10 LED Retrofit MR16



Accessories See Page 156



Glee



- Recessed downlight for MR16
- Die cast aluminium trim
- Separate order of electronic transformer available upon request




MX 5474 - M -

Code	Colour
82	White Trim & Black Reflector
84	White Trim & Silver Reflector
86	White Trim & Sandblasted Reflector
89	White Trim & Rose Gold Reflector

 1 x GU 5,3 LED Retrofit MR16




Accessories See Page 156



Glee Wallwasher



- Die cast aluminium trim
- Polycarbonate wallwasher optics with frosted diffuser
- Separate order of electronic transformer available upon request



MX 5477 - M - 84



1 x GU 5.3 LED Retrofit MR16
**Only for MR16 LED Retrofit 24° or 25° Beam Angle*



MX 5477

Glee Spot

- Die cast aluminium trim
- Polycarbonate secondary optics with various colour options
- Offset tilting adjustment and rotation allowed, maximise the effective tilting angle
- Separate order of electronic transformer available upon request




Offset Tilting Version

MX 5476 - M -

Code	Colour
82	White Trim & Black Reflector
84	White Trim & Silver Reflector
86	White Trim & Sandblasted Reflector
89	White Trim & Rose Gold Reflector

1 x GU 5.3 LED Retrofit MR16





Adjustable Version


MX 5495 - M -

Code	Colour
82	White Trim & Black Reflector
84	White Trim & Silver Reflector
86	White Trim & Sandblasted Reflector
89	White Trim & Rose Gold Reflector

1 x GU 5.3 LED Retrofit MR16



Accessories See Page 156



Pin Hole

- Recessed downlight for MR16
- Adjustable and fixed version available
- Die cast aluminium body available in 2 colours
- Separate order of electronic transformer available upon request




Adjustable Version

MX 5851 - □ □

Code	Colour	Code	Colour
-Blank-	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

1 x GU 5.3 LED Retrofit MR16

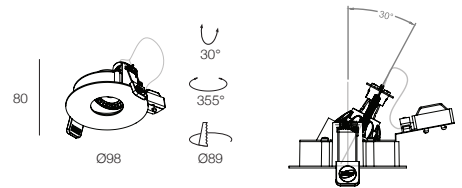


Adjustable Version with Cover Glass, IP55

MX 5851C - □ □

Code	Colour	Code	Colour
-Blank-	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

1 x GU 5.3 LED Retrofit MR16

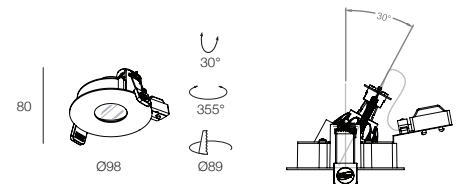


Fixed Version

MX 5852 - □ □

Code	Colour	Code	Colour
-Blank-	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

1 x GU 5.3 LED Retrofit MR16

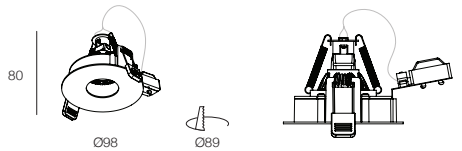


Fixed Version with Cover Glass, IP55


MX 5852C - □ □

Code	Colour	Code	Colour
-Blank-	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

1 x GU 5.3 LED Retrofit MR16


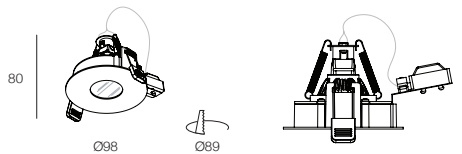


Accessory (*Match with Flush Mount Kit/ Installation Kit Version)





Flush Mount Kit
MX 3921 - □ □

Code	Colour
80	White
10	Black



Installation Kit
MX 3924 - 10



Pin Slot

- Recessed downlight for MR16
- Die cast aluminium body available in 2 colours
- Separate order of electronic transformer available upon request




Adjustable Version

MX 5853 - □ □

Code	Colour	Code	Colour
-Blank-	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

1 x GU 5.3 LED Retrofit MR16

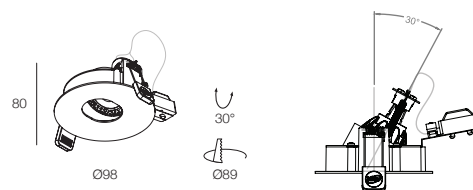


Adjustable Version with Cover Glass, IP55


MX 5853C - □ □

Code	Colour	Code	Colour
-Blank-	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

1 x GU 5.3 LED Retrofit MR16


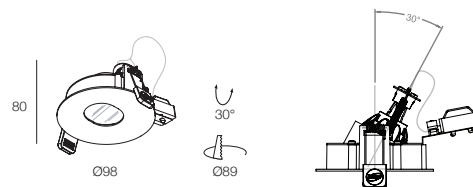


Accessory (*Match with Flush Mount Kit/ Installation Kit Version)





Flush Mount Kit
MX 3921 - □ □

Code	Colour
80	White
10	Black



Installation Kit
MX 3924 - 10



Space



- Recessed downlight for MR16
- Die cast aluminium body in 2 colours
- Separate order of electronic transformer available upon request



MX 5858 -

Code	Colour
80B	White
10B	Black

 1 x GU 5.3 LED Retrofit MR16



Atec

- Recessed downlight for MR16
- Adjustable and fixed version available
- Separate order of electronic transformer available upon request



Fixed Version

MX 5860 -

Code	Colour
80B	White Trim & Black Tube
80W	White Trim & Tube
10B	Black Trim & Tube

1 x GU 5.3 LED Retrofit MR16




Adjustable Version


MX 5861 -

Code	Colour
80B	White Trim & Black Tube
80W	White Trim & Tube
10B	Black Trim & Tube

1 x GU 5.3 LED Retrofit MR16



Accessories See Page 156



Renia

- Recessed downlight for MR16
- Die cast aluminium body available in 2 colours
- Adjustable and fixed version available
- Separate order of electronic transformer available upon request




Fixed Version

MX 5838 -

Code	Colour
80	White
10	Black

1 x GU 5.3 LED Retrofit MR16




Adjustable Version

MX 5837 -

Code	Colour
80	White
10	Black

1 x GU 5.3 LED Retrofit MR16




Accessory


Anti-Glare tube (Black)

MX 5949 - 10


Overall height increase by 20 mm

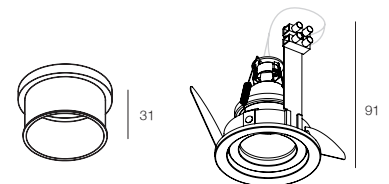

Renia + MX 5949-10



Accessories See Page 156



Mini Trim

- Recessed downlight for MR16
- Die cast aluminium body available in 2 colours
- Separate order of electronic transformer available upon request




Adjustable Version

MX 5878 -

Code	Colour
80	White
10	Black

1 x GU 5.3 LED Retrofit MR16




Wallwasher Version



MX 5879 -

Code	Colour
80	White
10	Black

1 x GU 5.3 LED Retrofit MR16



Accessories See Page 156



MX 5879

Mini Trim Sq

- Recessed downlight for MR16
- Die cast aluminium body available in 2 colours
- Separate order of electronic transformer available upon request




Fixed Version

MX 5874 -

Code	Colour
80	White
10	Black

1 x GU 5.3 LED Retrofit MR16




Adjustable Version


MX 5875 -

Code	Colour
80	White
10	Black

1 x GU 5.3 LED Retrofit MR16



Accessories See Page 156



Pin Hole Sq

- Recessed downlight for MR16
- Die cast aluminium body available in 2 colours
- Separate order of electronic transformer available upon request




Adjustable Version

MX 5855 - □ □

Code	Colour	Code	Colour
-Blank-	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

1 x GU 5.3 LED Retrofit MR16

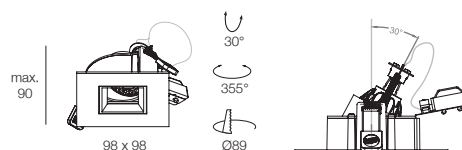


Adjustable Version with Cover Glass. IP55


MX 5855C - □ □

Code	Colour	Code	Colour
-Blank-	Standard Mount	80	White
F	Flush Mount Kit/ Installation Kit	10	Black

1 x GU 5.3 LED Retrofit MR16

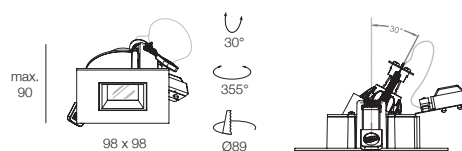



Accessory (*Match with Flush Mount Kit/ Installation Kit Version)





Flush Mount Kit

MX 3923 - □ □


Code	Colour
80	White
10	Black



Installation Kit
MX 3924 - 10



Accessories See Page 156



Multi Mini AT


- Recessed downlight for MR16
- Metal trim and body with various colour options
- Separate order of electronic transformer available upon request



MX 9112S - M -

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body


1 x GU 5.3 LED Retrofit MR16

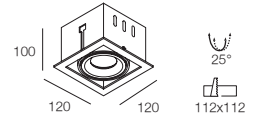

MX 9112D - MM -

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body


2 X 1 x GU 5.3 LED Retrofit MR16

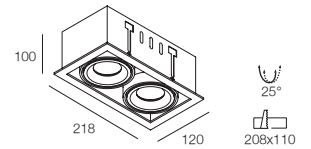

MX 9112T - MMM -

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body



3 X 1 x GU 5.3 LED Retrofit MR16

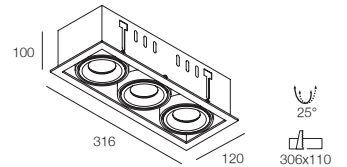


MX 9143 - M -

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body

1 x GU 5.3 LED Retrofit MR16



Accessories See Page 156



Multi Mini Trimless AT

- Recessed downlight for MR16
- Metal trim and body with various colour options
- Separate order of electronic transformer available upon request




MX 9162S - M - □ □ □

Trimless Installation Kit

MX TIK52S - □ □ □

Code	Colour	Colour of Installation Kit
00B	Black Body	Black
80W	White Body	White

1 x GU 5.3 LED Retrofit MR16




MX 9162D - MM - □ □ □

Trimless Installation Kit

MX TIK52D - □ □ □

Code	Colour	Colour of Installation Kit
00B	Black Body	Black
80W	White Body	White

2 X 1 x GU 5.3 LED Retrofit MR16





MX 9162T - MMM - □ □ □

Trimless Installation Kit


MX TIK52T - □ □ □

Code	Colour	Colour of Installation Kit
00B	Black Body	Black
80W	White Body	White

3 X 1 x GU 5.3 LED Retrofit MR16



Accessories See Page 156



Multi Super Mini


- Recessed downlight for MR16
- Body with various colour options
- Separate order of electronic transformer available upon request



MX 9114S - M -

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body


1 x GU 5.3 LED Retrofit MR16



MX 9114D - MM -

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body


2 X 1 x GU 5.3 LED Retrofit MR16



MX 9114T - MMM -

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body


3 X 1 x GU 5.3 LED Retrofit MR16




MX 9115 - M -

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body

1 x GU 5.3 LED Retrofit MR16



Accessories See Page 156



Multi Super Mini Trimless


- Recessed downlight for MR16
- Body with various colour options
- Separate order of electronic transformer available upon request



MX 9116S - M -
 Trimless Installation Kit
MX TIK41LS -

Code	Colour	Colour of Installation Kit
00B	Black Body	Black
80W	White Body	White


1 x GU 5.3 LED Retrofit MR16



MX 9116D - MM -
 Trimless Installation Kit
MX TIK41LD -

Code	Colour	Colour of Installation Kit
00B	Black Body	Black
80W	White Body	White



2 X 1 x GU 5.3 LED Retrofit MR16




MX 9116T - MMM -
 Trimless Installation Kit
MX TIK41LT -

Code	Colour	Colour of Installation Kit
00B	Black Body	Black
80W	White Body	White

3 X 1 x GU 5.3 LED Retrofit MR16




Accessories See Page 156



Cybox Mini

- Tracklight with 3-phase adaptor for MR16
- Aluminium body available in 2 colours
- Surface mounted version available upon request
- Integrated electronic transformer




Vertical Gear Box Version

MX 6839P - M -

Code	Colour
80	White
10	Black

 1 x GU 5.3 LED Retrofit MR16





Horizontal Gear Box Version

MX 6838P - M -

Code	Colour
80	White
10	Black

 1 x GU 5.3 LED Retrofit MR16



Multi Box Mini AT


- Surface mounted downlight for MR16
- Aluminium housing and metal body available in different colours
- Integrated electronic transformer



MX 9175S - M -

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body


1 x GU 5.3 LED Retrofit MR16



MX 9175D - MM -

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body



2 X 1 x GU 5.3 LED Retrofit MR16




MX 9175T - MMM -

Code	Colour
80B	White Trim & Black Body
80W	White Trim & Body
10B	Black Trim & Body

3 X 1 x GU 5.3 LED Retrofit MR16



Accessories See Page 156



Philips MR16 LED Retrofit


- LED MR16 lamp in GU5.3, 12V AC
- High power LED apply
- 40,000 hours 70% lumen maintenance
- Driven by electronic transformer




P7 - M11D - - 6.5 - 9 K

Code	Beam Angle	Code	CCT
10	10°	27	2700K
24	24°	30	3000K
36	36°	40	4000K
60	60°		

Philips 6.5W LED MR16, CRI90 (Dimmable Version)




P7-M9D-24-6.5-930K **P7-M9D-36-6.5-930K**



P7 - M11D - - 7.5 - 8 K

Code	Beam Angle	Code	CCT
24	24°	27	2700K
36	36°	30	3000K
		40	4000K (36° only)

Philips 7.5W LED MR16, CRI80 (Dimmable Version)

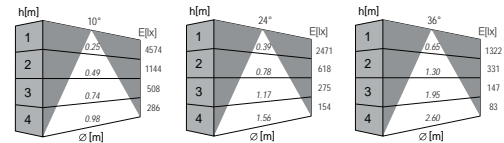


P7-M9D-10-7-930K **P7-M9D-24-7-930K** **P7-M7D-36-7-930K**





P7 - M10D - - 6.7 - 9 K

Code	Beam Angle	Code	CCT
10	10°	27	2700K
24	24°	30	3000K
36	36°	40	4000K
60	60°		

Philips Expert Colour 6.7W LED MR16, CRI97 (Dimmable Version)

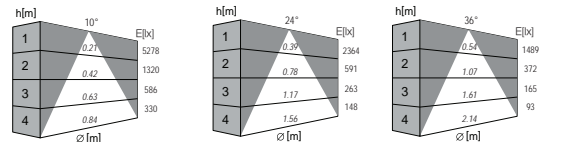

P7-M8D-10-7.2-930K **P7-M8D-24-7.2-930K** **P7-M8D-36-7.2-930K**



P7-M7D-9-25-930 **P7-M7D-9-36-930**

12V Step Down Transformer

Ordering Code	Matching with Philips MR16 LED Retrofit	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LV12-E-10-PH(39)	1 pc	180 x 54 x 35	Ø 64

SORAA MR16 LED Retrofit

- LED MR16 lamp in GU5.3, 12V AC/DC
- High power LED apply
- 40,000 hours 70% lumen maintenance
- 3 beam angles, 3 colour temperatures available
- CRI95+
- Driven by electronic transformer




SORAA 10° Version


V7 - M7D - 7.5 - 10 -

Code	CCT
927	2700K
930	3000K
940	4000K

Soraa Vivid3 7.5W LED MR16, CRI95 (Dimmable Version)



V7-M7D-7.5-10-930




SORAA 25°/36° Version


V7 - M7D - 7.5 - -

Code	Beam Angle	Code	CCT
25	25°	927	2700K
36	36°	930	3000K
		940	4000K


Soraa Vivid3 7.5W LED MR16, CRI95 (Dimmable Version)



V7-M7D-7.5-25-930




V7-M7D-7.5-36-930




V7 - M7D - 9 - -

Code	Beam Angle	Code	CCT
25	25°	927	2700K
36	36°	930	3000K

Soraa Vivid3 9W LED MR16, CRI95 (Dimmable Version)



V7-M7D-9-25-930




V7-M7D-9-36-930

12V Step Down Transformer

Ordering Code	Matching with Philips MR16 LED Retrofit	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LV12-E-30-OS(39)	1 pc	180 x 54 x 35	Ø 64

Accessory

- Glass diffuser/ honey comb accessory for selected series
- 1 accessory can be used in one lamp head
- Accessories can be added after installation

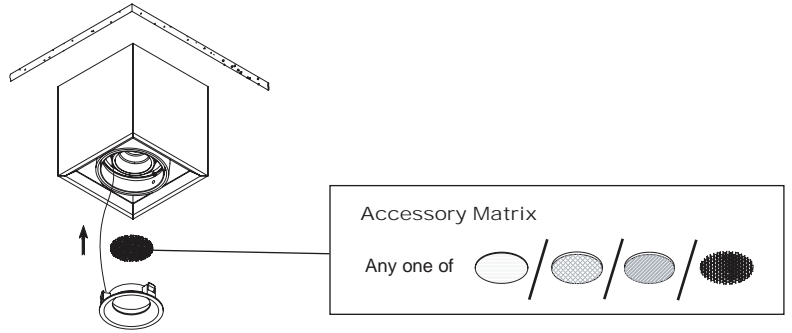

Ø50 Accessory for **FreePlus Module, MR16 Retrofit, Glee, Glee Spot, Multi Box Mini, Multi Box Lite**



MX 9924
Frosted Glass Diffuser




MX 9925
Obscured Glass Diffuser



MX 9958
Linear Spread Glass Diffuser



MX 9955
Black Honey Comb Louvre



Ø70 Accessory for **Novas, Tracbox, Armbox, Multi Mini Xito, Multi Mini Spot, Rela**




MX 9974
Frosted Glass Diffuser



MX 9975
Linear Spread Glass Diffuser



MX 9976
Black Honey Comb Louvre



Ø35 Accessory for **Mini Glee and Mini Pin Hole**




MX 9980
Frosted Glass Diffuser




MX 9981
Obscured Glass Diffuser



MX 9982
Linear Spread Glass Diffuser



MX 9983
Black Honey Comb Louvre




Ø44 Accessory for **Glek IB, Mini Armbox, Mini IB**



MX 9984
Frosted Glass Diffuser




MX 9985
Obscured Glass Diffuser




MX 9986
Linear Spread Glass Diffuser



MX 9987
Black Honey Comb Louvre



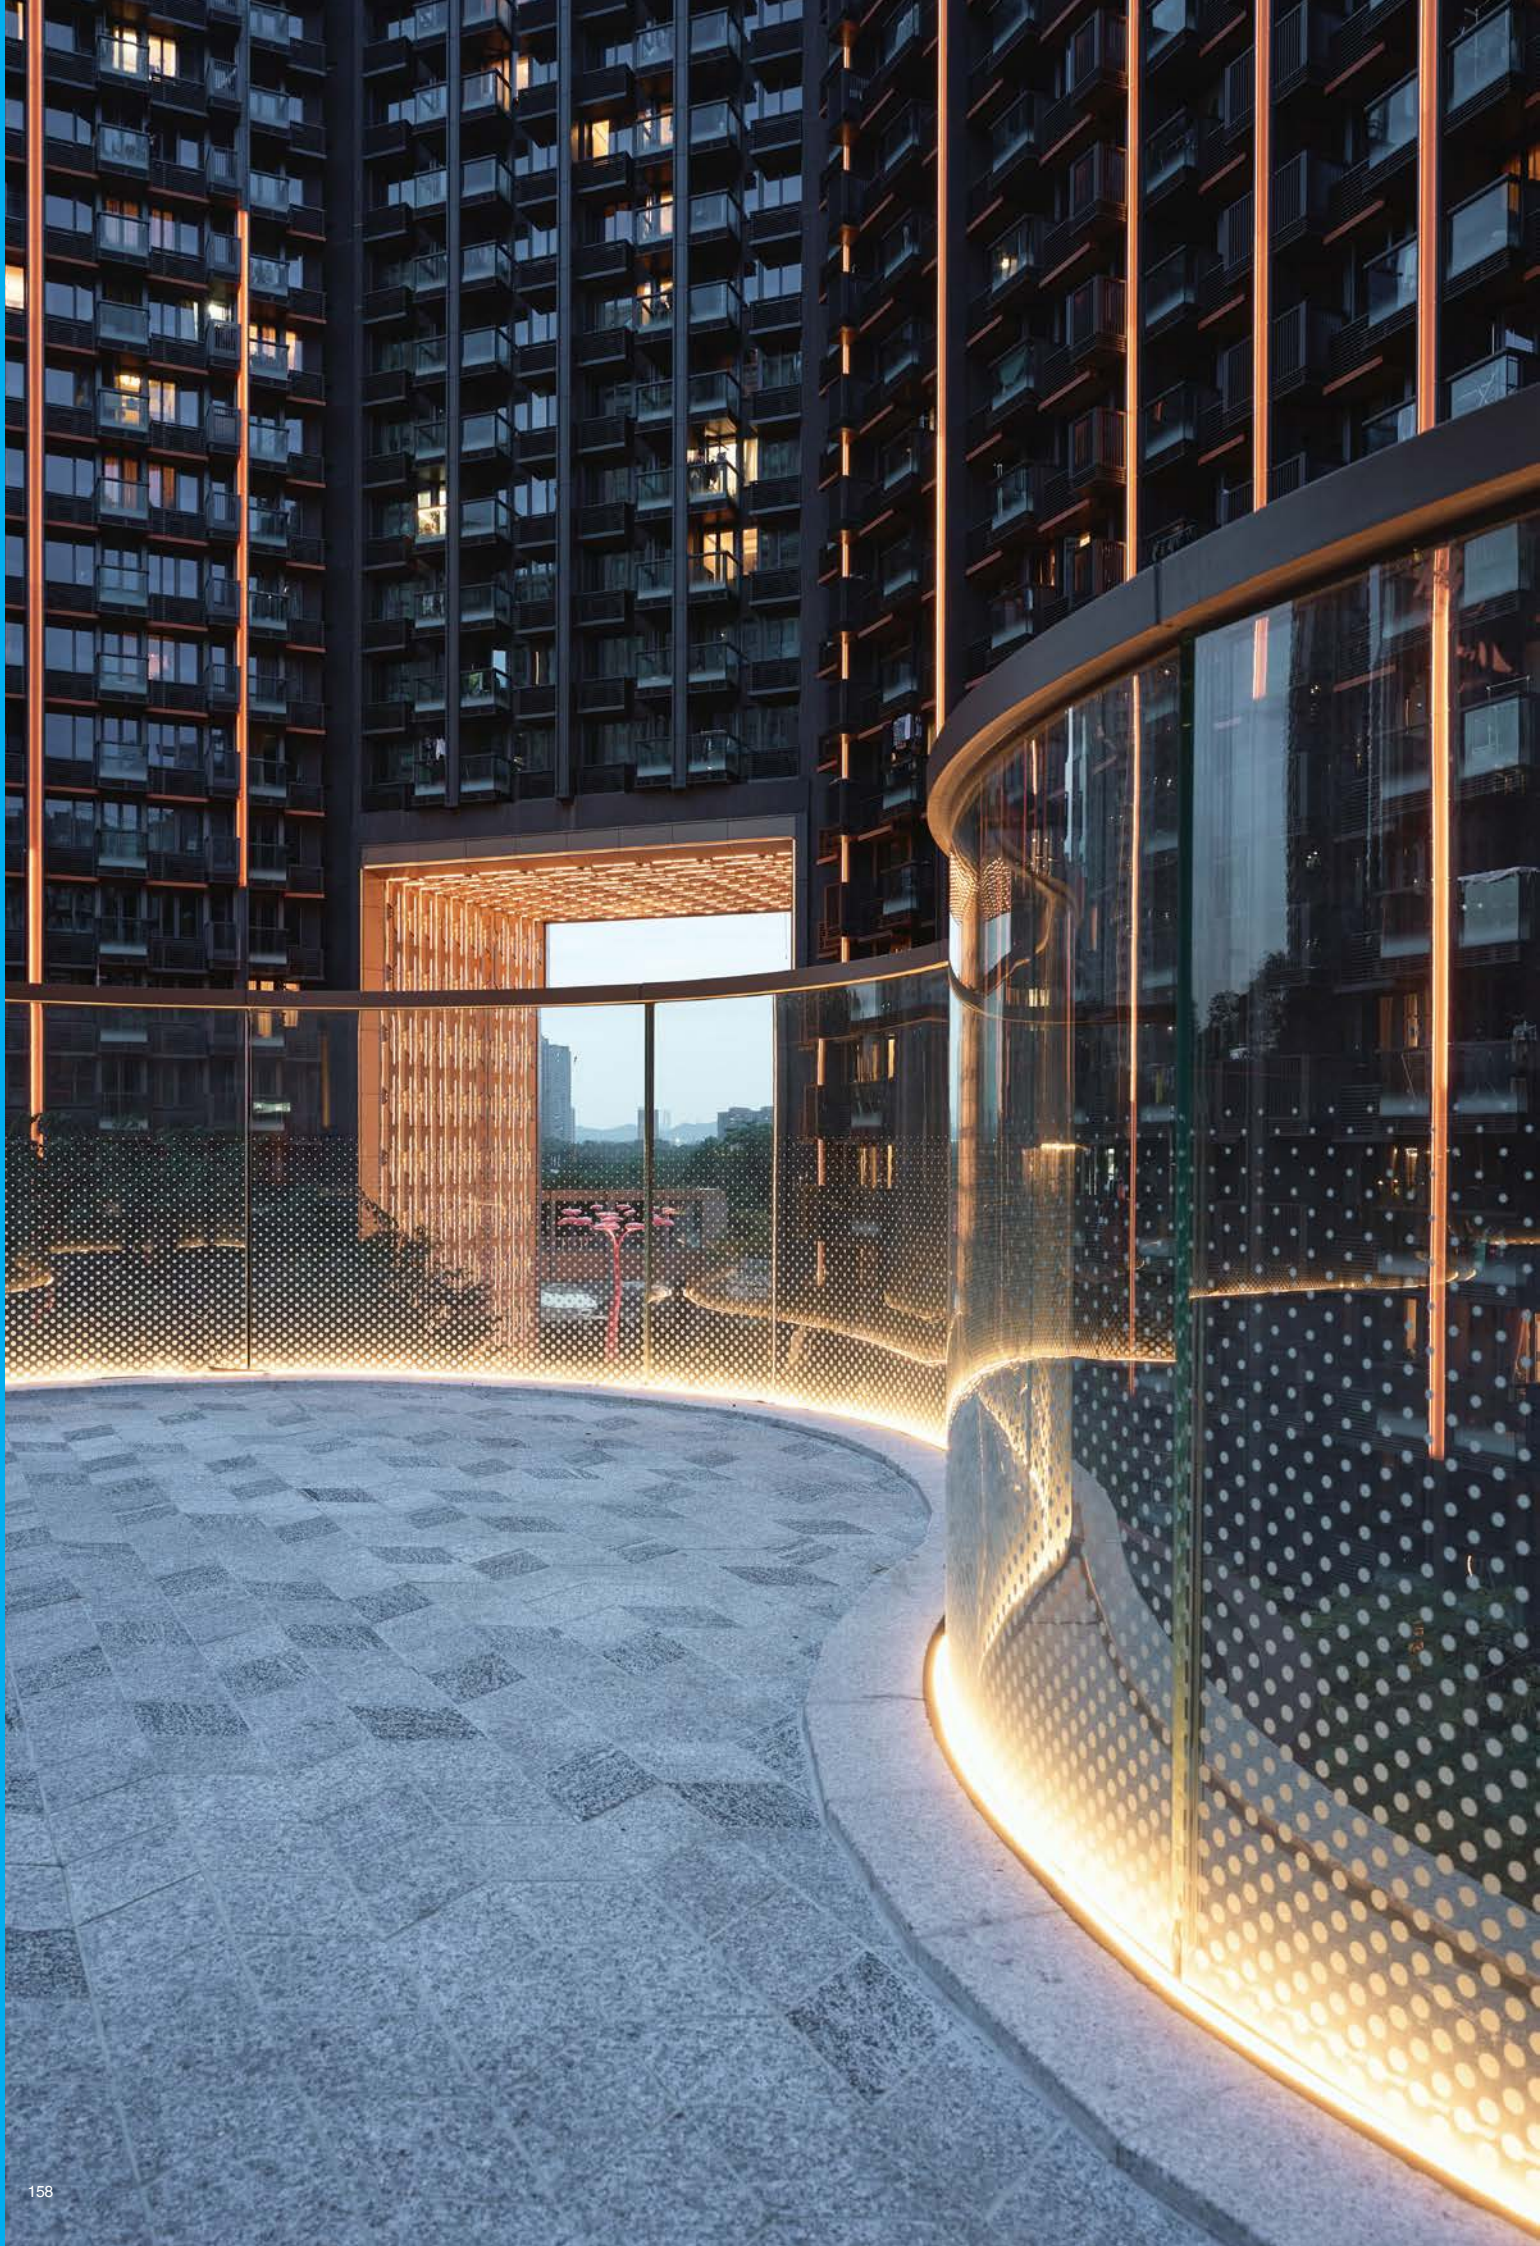

LED Strip & Linear Profile

/ Index



160

SurfWash



161

P-Bar G3



162

P-Bar Lite G3




164

LEDStrip Thin



166

LEDStrip Unit



168

LEDStrip COB



170

LEDStrip Stick Mini



172

LEDStrip Corner
Mini



174

Neon Strip 1010




175

Neon Strip 1220



176

Neon Strip 1616



178

LEDStrip




180

LEDStrip HE




182

LEDStrip Mini



184

LEDStrip Duo




186

CC LED Strip




188

LED Vertical Strip




190

LEDStrip Dual



192

RGB LED Strip



194

RGBW LED Strip




196

LEDStrip S Pro




198

LEDStrip Pro



200

LEDStrip Stick



202

LEDStrip L Pro



204

LEDStrip N Stick




206

LEDStrip Pro
Corner

SurfWash

- High Power LED ceiling washer
- Extrusion aluminium body
- 60° beam angle
- 3 CCT options in 2700K, 3000K and 4000K
- Provided with adjustable mounting clip
- Separate order of remote driver is available

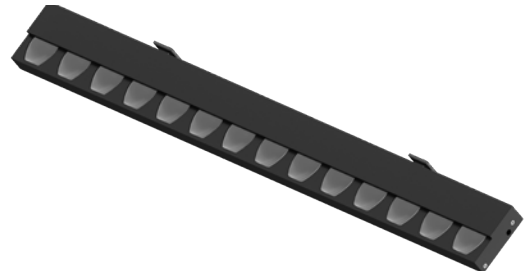


NEW

SurfWash 600mm

MX 6425 - G3 - 14 - 600 - [] [] - [] []

Code	CRI	Code	CCT	Code	Colour
9	90	27	2700K	80	White
		30	3000K	10	Black
		40	4000K		

600mm, 24V, 14 x 1.5W LED 1130lm





SurfWash 1200mm


MX 6425 - G3 - 28 - 1200 - [] [] - [] []

Code	CRI	Code	CCT	Code	Colour
9	90	27	2700K	80	White
		30	3000K	10	Black
		40	4000K		

1200mm, 24V, 28 x 1.5W LED 2260lm

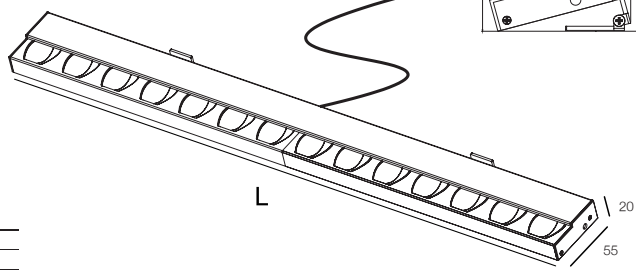


Recommend distance and angle from wall

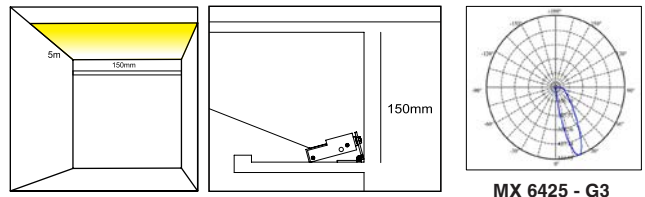

Accessory


MX 3912

Adjustable Mounting Clip for light trough



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	1 - 60W	Max 2pcs SurfWash 600mm 1pc SurfWash 1200mm	24V DC	320 x 73 x 41	Ø85
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-120-PH(41)	1 - 120W	Max 4pcs SurfWash 600mm Max 2pcs SurfWash 1200mm	24V DC	350 x 102 x 41	Ø110
EC LED-24V-150D-AS-PH(38)	0 - 150W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90

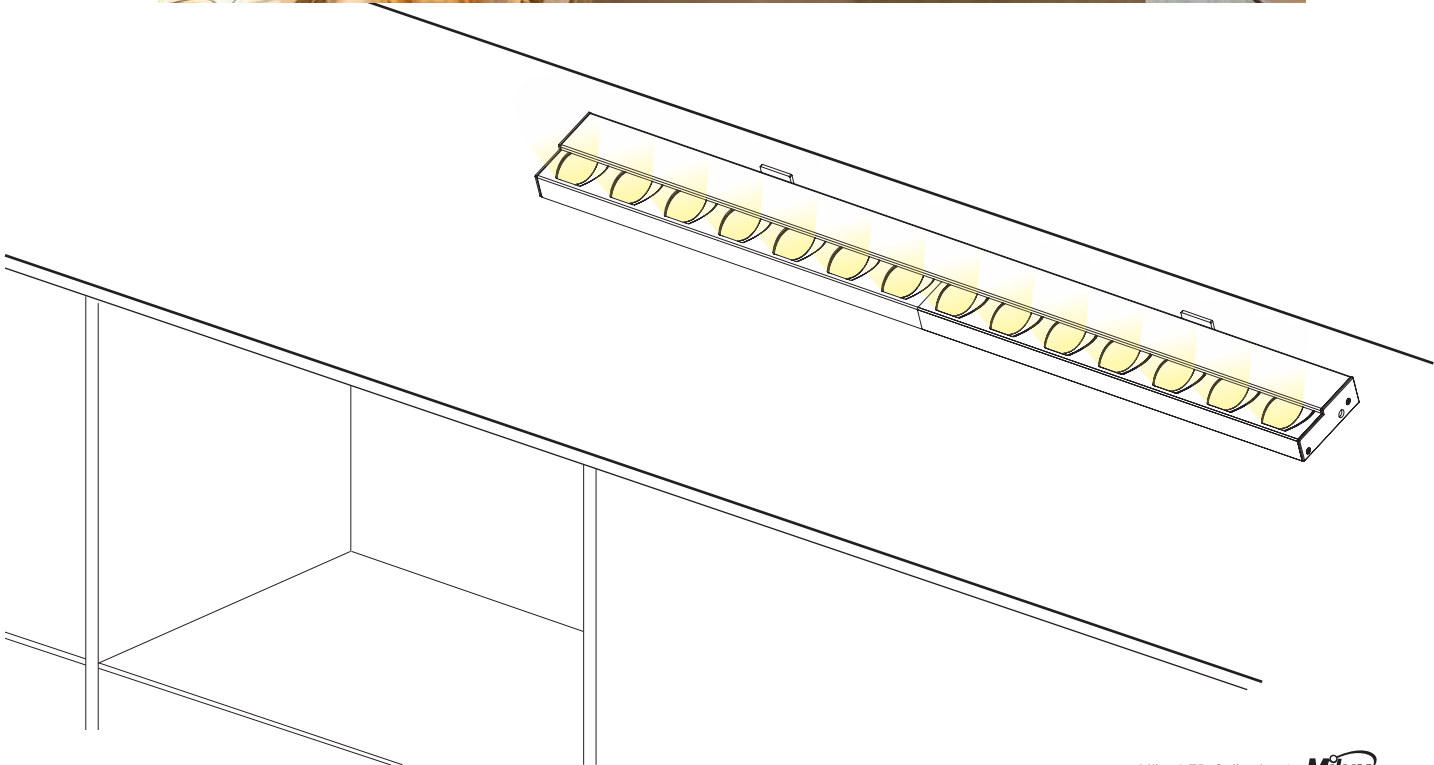

P-Bar G3

- High Power LED wall grazer
- Extrusion aluminium body
- 10° x 35° beam angle
- 4 CCT options in 2700K, 3000K, 3500K and 4000K
- Provided with adjustable mounting clip
- Separate order of remote driver is available



NEW

P-Bar G3 600mm

MX 6424 - G3 - 21 - 600 - [] [] - [] []

Code	CRI	Code	CCT	Code	Colour
9	90	27	2700K	80	White
		30	3000K	10	Black
		35	3500K		
		40	4000K		





600mm, 24V, 21 x 1.2W LED, 2520lm

P-Bar G3 1200mm

MX 6424 - G3 - 42 - 1200 - [] [] - [] []

Code	CRI	Code	CCT	Code	Colour
9	90	27	2700K	80	White
		30	3000K	10	Black
		35	3500K		
		40	4000K		

1200mm, 24V, 42 x 1.2W LED, 5040lm

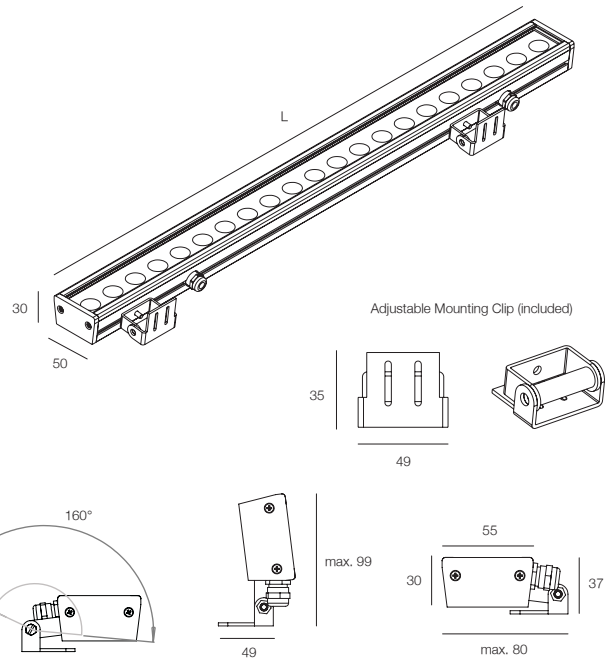

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	Max 2pcs P-Bar G3 600mm Max 1pc P-Bar G3 1200mm	24V DC	320 x 73 x 41	Ø85
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-120-PH(41)	3 - 120W	Max 4pcs P-Bar G3 600mm Max 2pcs P-Bar G3 1200mm	24V DC	350 x 102 x 41	Ø110
EC LED-24V-150D-AS-PH(38)	0 - 150W	Max 5pcs P-Bar G3 600mm Max 2pcs P-Bar G3 1200mm	24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90

P-Bar Lite G3

- High Power LED wall grazer
- Extrusion aluminium body
- 30° x 65° beam angle
- 4 CCT options in 2700K, 3000K, 3500K and 4000K
- Provided with adjustable mounting clip
- Separate order of remote driver is available



NEW

P-Bar Lite G3 600mm

MX 6423 - G3 - 14 - 600 - [] [] - [] []

Code	CRI	Code	CCT	Code	Colour
9	90	27	2700K	80	White
		30	3000K	10	Black
		35	3500K		
		40	4000K		




600mm, 24V, 14 x 1W LED, 2100lm

P-Bar Lite G3 1200mm


MX 6423 - G3 - 28 - 1200 - [] [] - [] []

Code	CRI	Code	CCT	Code	Colour
9	90	27	2700K	80	White
		30	3000K	10	Black
		35	3500K		
		40	4000K		

1200mm, 24V, 28 x 1W LED, 4200lm

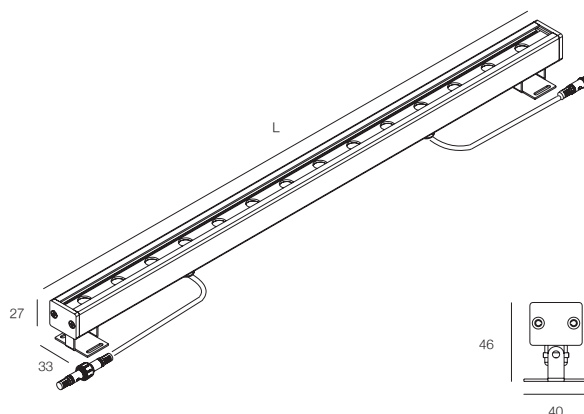

MX6423-G3-14-600






MX6423-G3-28-1200

new

Accessory

MX 3911

Adjustable Mounting Clip



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	Max 2pcs P-Bar Lite G3 600mm Max 1pc P-Bar Lite G3 1200mm	24V DC	320 x 73 x 41	Ø85
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-120-PH(41)	3 - 120W	Max 5pcs P-Bar Lite G3 600mm Max 2pcs P-Bar Lite G3 1200mm	24V DC	350 x 102 x 41	Ø110
EC LED-24V-150D-AS-PH(38)	0 - 150W	Max 7pcs P-Bar Lite G3 600mm Max 3pcs P-Bar Lite G3 1200mm	24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90

LEDStrip Thin

- Easy to bend for flexible design
- Cutting unit 50mm
- CRI typical 80+ and 90+ options
- 3M adhesive in the Flexible Strip
- Water proof silicon sleeve in IP65 version
- Custom power and length upon request
- Separate order of power supply is available upon request
- SDCM Step 3, high colour temperature stability



NEW


IP20 Version

MX 6460 - G2 - [] [] - [] [] K - 24V - PM



Code	Power	Code	CRI	Code	CCT
6.6	6.6W/m	8	80+	27	2700K
9.6	9.6W/m	9	90+	30	3000K
13.2	13.2W/m			35	3500K
				40	4000K

- ◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1486lm/m, CRI80+ (3000K)
- ◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1330lm/m, CRI90+ (3000K)




IP65 Version

MX 6461 - G2 - [] [] - [] [] K - 24V - PM




Code	Power	Code	CRI	Code	CCT
6.6	6.6W/m	8	80+	27	2700K
9.6	9.6W/m	9	90+	30	3000K
13.2	13.2W/m			35	3500K
				40	4000K


- ◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1486lm/m, CRI80+ (3000K)
- ◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1330lm/m, CRI90+ (3000K)



1:1 Scale

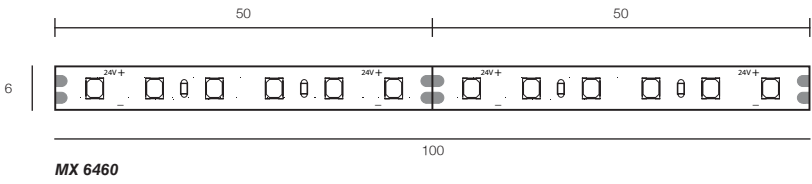


MX 6460

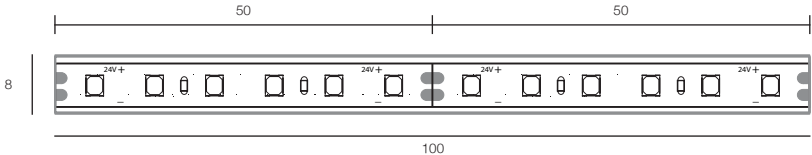

MX 6461 (IP65 Version)

Connection Details

Maximum 3 meters in LINEAR CONNECTION

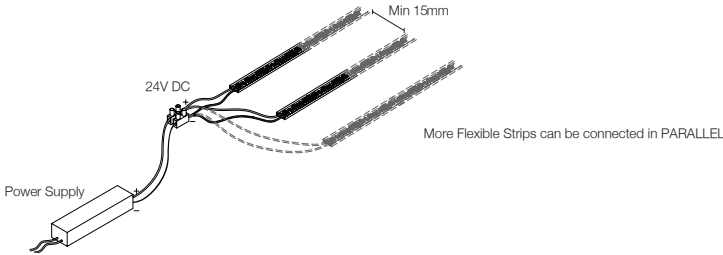

LED Driver					
Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip Thin	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip Unit

- Easy to bend for flexible design
- Cutting unit 10mm
- CRI typical 80+
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP65 Flexible Strip
- Water proof silicon sleeve in IP65 version
- Custom power and length upon request
- Separate order of power supply is available upon request
- SDCM Step 3, high colour temperature stability



NEW


IP20 Version

MX 6450 - [] [] [] - 8 [] [] K - 24V - PM



Code	Power	Code	CCT
6.6	6.6W/m	27	2700K
9.6	9.6W/m	30	3000K
13.2	13.2W/m	35	3500K
		40	4000K

24V DC, 100pcs LEDs/m, 13.2W/m, 1500lm/m, CRI80+ (3000K)




IP65 Version

MX 6451 - [] [] [] - 8 [] [] K - 24V - PM




Code	Power	Code	CCT
6.6	6.6W/m	27	2700K
9.6	9.6W/m	30	3000K
13.2	13.2W/m	35	3500K
		40	4000K


24V DC, 100pcs LEDs/m, 13.2W/m, 1500lm/m, CRI80+ (3000K)



1:1 Scale

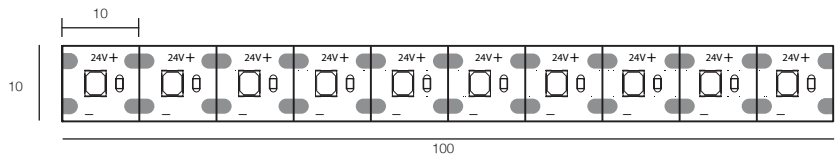


MX 6450

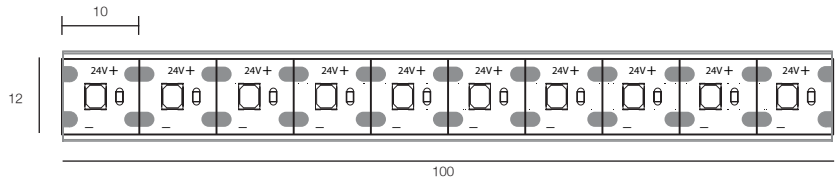

MX 6451 (IP65 Version)

Connection Details


Maximum 5 meters in LINEAR CONNECTION

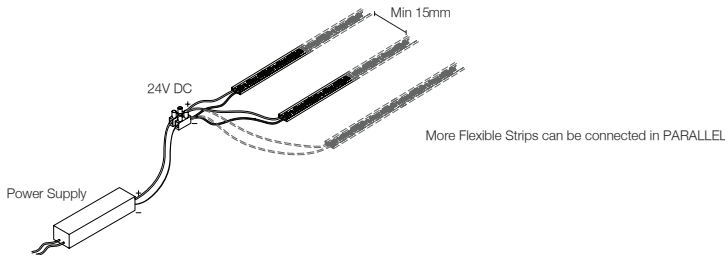


Accessory

LEDStrip Plastic Clip (for IP65 version only)

MX 6355 - PM



MX 6355 - L20



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip Unit	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip COB

- Easy to bend for dotness design
- Cutting unit 41.66mm
- CRI 90+ options
- 3M adhesive in the Flexible Strip
- Water proof silicon sleeve in IP65 version
- Custom length upon request
- Separate order of power supply is available upon request
- High colour temperature stability



NEW


IP20 Version

AP LT 7122 - 10 - 9 **K - 24V - PM**



Code	CCT
27	2700K
30	3000K
40	4000K

24V DC, 384pcs LEDs/m, 10W/m, 1000lm/m, CRI90+ (3000K)




IP65 Version

AP LT 7123 - 10 - 9 **K - 24V - PM**




Code	CCT
27	2700K
30	3000K
40	4000K


24V DC, 384pcs LEDs/m, 10W/m, 1000lm/m, CRI90+ (3000K)



1:1 Scale

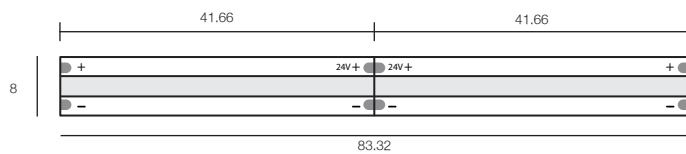


AP LT7122

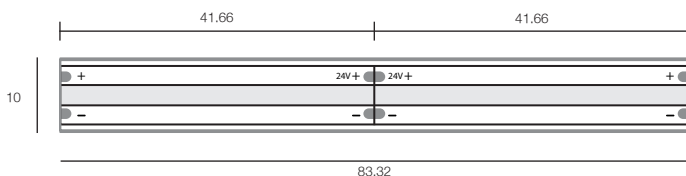

AP LT7123 (IP65 Version)

Connection Details

Maximum 5 meters in LINEAR CONNECTION

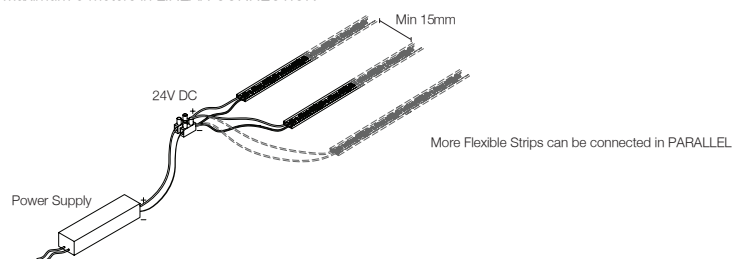

LED Driver						
Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)	
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip COB	24V DC	320 x 73 x 41	Ø85	
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110	
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90	
EC LED-24V-150D-AS-PH(38)	0 - 150W					

LEDStrip Stick Mini

- DC 24V 2835 COB LED Flexible Strip, 10W per meter
- CRI typical 90+
- High Lumen Output
- High colour temperature stability
- Dimmable version available upon request
- Custom length upon request
- Separate order of power supply is available upon request




NEW


AP LT 7141 - V1- 9 - 24V -

Code	CCT	Code	Length(L)	Output Power
27	2700K	0520	520mm	192 x LED, 5W
30	3000K	1020	1020mm	384 x LED, 10W
40	4000K			


24V DC, 384pcs LEDs/m, 10W/m, 1000lm/m, CRI90+ (3000K)



1:1 Scale




Profile



Profile with Mounting clip

Connection Details

Maximum 5 meters in LINEAR CONNECTION

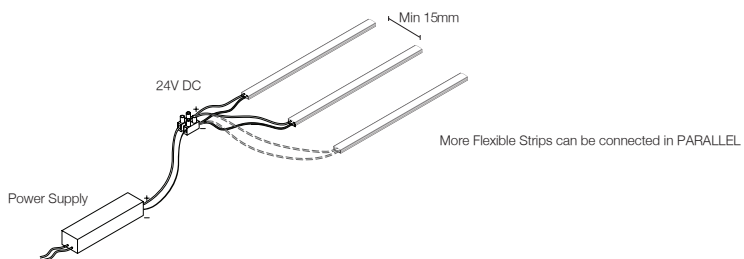

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip Stick Mini	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip Corner Mini

- DC 24V 2835 COB LED Flexible Strip, 10W per meter
- CRI typical 90+
- High Lumen Output
- High colour temperature stability
- Dimmable version available upon request
- Custom length upon request
- Separate order of power supply is available upon request




NEW


AP LT 7140 - V1-9 - 24V -

Code	CCT	Code	Length(L)	Output Power
27	2700K	0520	520mm	192 x LED, 5W
30	3000K	1020	1020mm	384 x LED, 10W
40	4000K			


24V DC, 384pcs LEDs/m, 10W/m, 1000lm/m, CRI90+ (3000K)

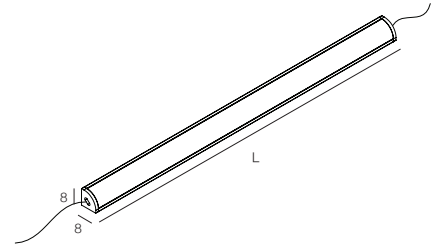

1:1 Scale




Profile



Profile with Mounting clip

Connection Details


Maximum 5 meters in LINEAR CONNECTION

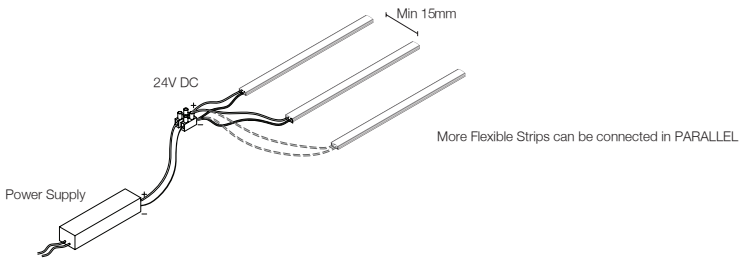

LED Driver					
Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip Corner Mini	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

Neon Strip 1010

- High quality and high brightness SMD chip
- Wide range of white colour options
- High colour consistency & smooth illumination with non-visible light dots
- Mounting profiles for easy installation
- Custom length available




IP 65 Version

MX 6453 - G2 - [] - [] - [] - 24V - PM


Code	Bending Direction	Code	Power	Code	CRI	Code	CCT
VB	Vertical Bending	4.8	4.8W/m	8	80+	27	2700K
VBT	Vertical Bending Three Side	6.6	6.6W/m	9	90+	30	3000K
HB	Horizontal Bending	9.6	9.6W/m			35	3500K
						40	4000K

- ◇ 24V DC, CRI80+, 180pcs LEDs/m, 9.6W/m, 1363lm/m(3000K)
- ◇ 24V DC, CRI90+, 180pcs LEDs/m, 9.6W/m, 1190lm/m(3000K)

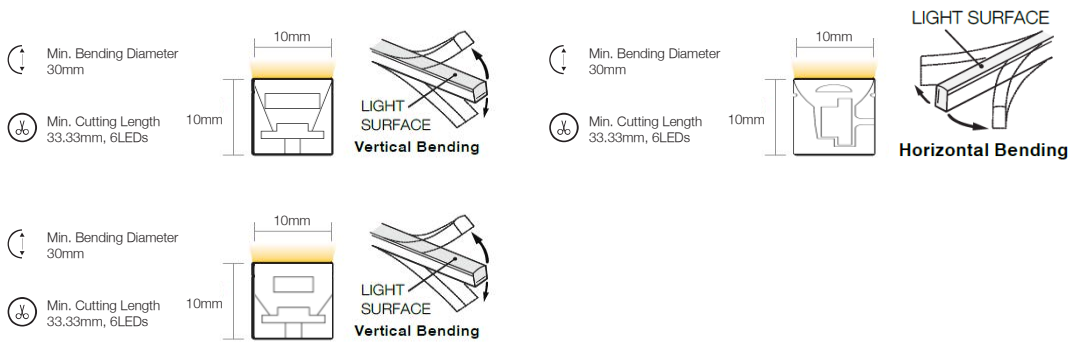

Accessory


Aluminum Profile



MX 3930 - [] - [] - []

Code	Length
0035	35mm
0500	500mm
1000	1000mm
2000	2000mm

Bendable Serrated Aluminum Profile



MX 3931 - [] - [] - []


Code	Length
0035	35mm
0500	500mm
1000	1000mm
2000	2000mm

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	60W	Neon Strip 1010	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	120W			350 x 103 x 45	Ø83
EC LED-24V-60D-AS-PH(38)	60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	150W				

Neon Strip I220

- High quality and high brightness SMD chip
- Wide range of white colour options
- High colour consistency & smooth illumination with non-visible light dots
- Mounting profiles for easy installation
- Custom length available




IP 65 Version

MX 6454 - G2 - [] - [] - [] - 24V - PM


Code	Bending Direction	Code	Power	Code	CRI	Code	CCT
HB	Horizontal Bending	4.8	4.8W/m	8	80+	27	2700K
		6.6	6.6W/m	9	90+	30	3000K
		9.6	9.6W/m			35	3500K
						40	4000K

- 24V DC, CRI80+, 180pcs LEDs/m, 9.6W/m, 1363lm/m(3000K)
- 24V DC, CRI90+, 180pcs LEDs/m, 9.6W/m, 1190lm/m(3000K)

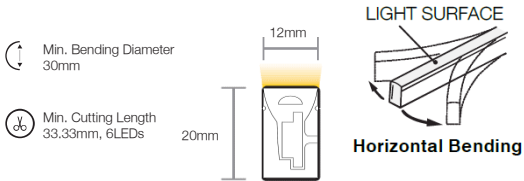

Accessory

Aluminum Profile



MX 3932 - [] - [] - [] - []

Code	Length
0035	35mm
0500	500mm
1000	1000mm
2000	2000mm

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	60W	Neon Strip 1220	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	120W			350 x 103 x 45	Ø83
EC LED-24V-60D-AS-PH(38)	60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	150W				

Neon Strip 1616

- High quality and high brightness SMD chip
- Wide range of white colour options
- High colour consistency & smooth illumination with non-visible light dots
- Mounting profiles for easy installation
- Custom length available




IP 65 Version

MX 6455 - G2 - [] - [] - [] - 24V - PM


Code	Bending Direction	Code	Power	Code	CRI	Code	CCT
HB	Horizontal Bending	4.8	4.8W/m	8	80+	27	2700K
		6.6	6.6W/m	9	90+	30	3000K
		9.6	9.6W/m			35	3500K
						40	4000K

- ◇ 24V DC, CRI80+, 180pcs LEDs/m, 9.6W/m, 1363lm/m(3000K)
- ◇ 24V DC, CRI90+, 180pcs LEDs/m, 9.6W/m, 1190lm/m(3000K)

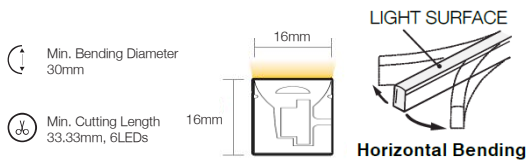

Accessory

Aluminum Profile



MX 3933 - [] - [] - [] - []

Code	Length
0035	35mm
0500	500mm
1000	1000mm
2000	2000mm

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	60W	Neon Strip 1616	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	120W			350 x 103 x 45	Ø83
EC LED-24V-60D-AS-PH(38)	60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	150W				



LEDStrip

- Easy to bend for flexible design
- Cutting unit 50mm
- CRI typical 80+ and 90+ options
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP65 Flexible Strip
- Water proof silicon sleeve in IP65 version
- Custom power and length upon request
- Separate order of power supply is available upon request
- SDCM Step 3, high colour temperature stability



IP20 Version


MX 6458 - G2 - [] [] [] - [] [] [] - 24V - PM



Code	Power	Code	CRI	Code	CCT
2.0	2.0W/m	8	80+	27	2700K
6.6	6.6W/m	9	90+	30	3000K
9.6	9.6W/m			35	3500K
13.2	13.2W/m			40	4000K

◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1486lm/m, CRI80+ (3000K)

◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1330lm/m, CRI90+ (3000K)



IP65 Version


MX 6459 - G2 - [] [] [] - [] [] [] - 24V - PM




Code	Power	Code	CCT	Code	CCT
6.6	6.6W/m	8	80+	27	2700K
9.6	9.6W/m	9	90+	30	3000K
13.2	13.2W/m			35	3500K
				40	4000K

◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1486lm/m, CRI80+ (3000K)


◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1330lm/m, CRI90+ (3000K)

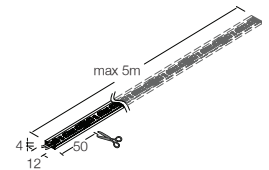

1:1 Scale

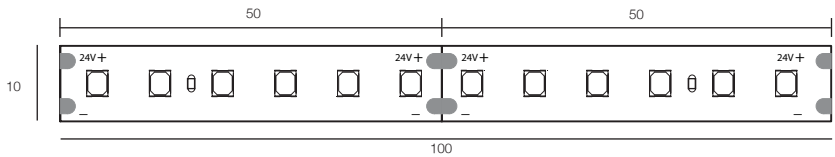


MX 6458

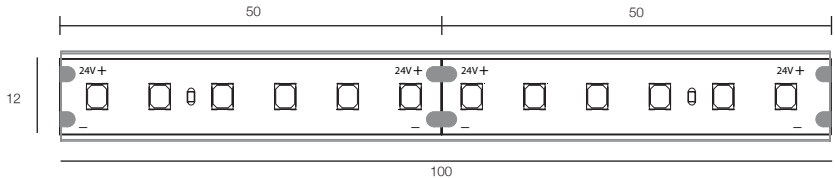

MX 6459 (IP65 Version)

Connection Details


Maximum 5 meters in LINEAR CONNECTION

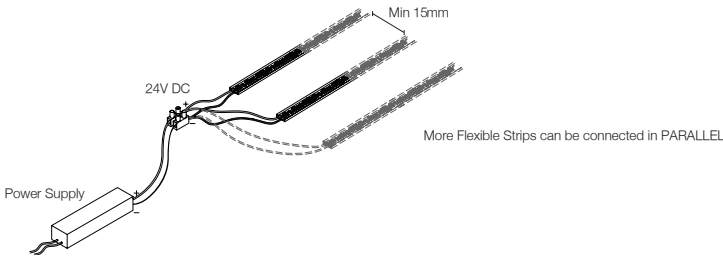


Accessory

LEDStrip Plastic Clip (for IP65 version only)

MX 6355 - PM



MX 6355 - L20



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip HE

- Easy to bend for flexible design
- Cutting unit 62.5mm
- CRI typical 80+ and 90+ options
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP65 Flexible Strip
- Water proof silicon sleeve in IP65 version
- Custom power and length upon request
- Separate order of power supply is available upon request
- SDCM Step 3, high colour temperature stability
- High efficiency version




IP20 Version

MX 6468 - G2 - [] [] [] - [] [] [] - 24V - PM



Code	Power	Code	CCT	Code	CCT
2.0	2.0W/m	8	80+	27	2700K
6.6	6.6W/m	9	90+	30	3000K
9.6	9.6W/m			35	3500K
13.2	13.2W/m			40	4000K

- ◇ 24V DC, 128pcs LEDs/m, 13.2W/m, 1866lm/m, CRI80+ (3000K)
- ◇ 24V DC, 128pcs LEDs/m, 13.2W/m, 1670lm/m, CRI90+ (3000K)




IP65 Version

MX 6469 - G2 - [] [] [] - [] [] [] - 24V - PM




Code	Power	Code	CCT	Code	CCT
6.6	6.6W/m	8	80+	27	2700K
9.6	9.6W/m	9	90+	30	3000K
13.2	13.2W/m			35	3500K
				40	4000K


- ◇ 24V DC, 128pcs LEDs/m, 13.2W/m, 1866lm/m, CRI80+ (3000K)
- ◇ 24V DC, 128pcs LEDs/m, 13.2W/m, 1670lm/m, CRI90+ (3000K)



1:1 Scale

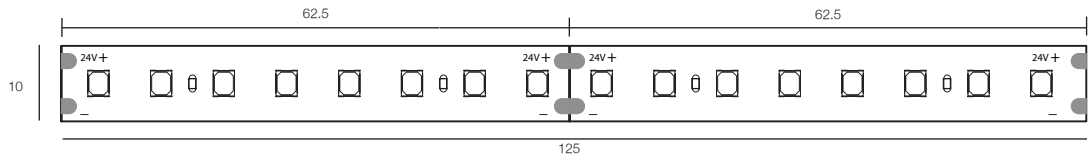


MX 6468

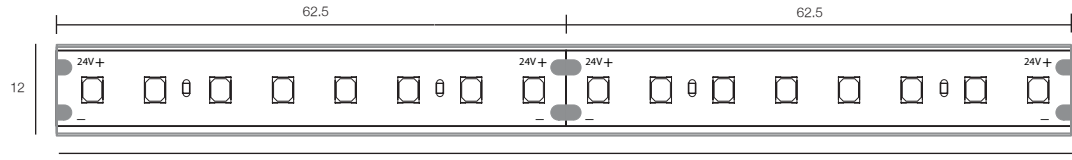

MX 6469 (IP65 Version)

Connection Details


Maximum 5 meters in LINEAR CONNECTION

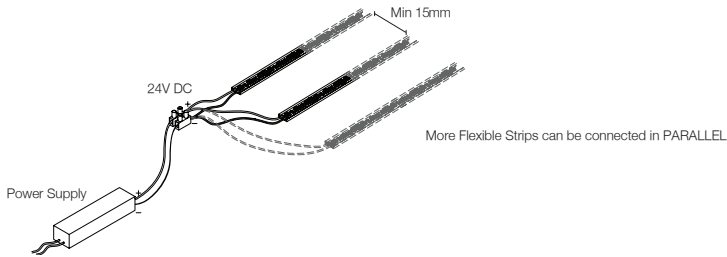


Accessory

LEDStrip Plastic Clip (for IP65 version only)

MX 6355 - PM



MX 6355 - L20



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip HE	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip Mini

- Easy to bend for flexible design
- Cutting unit 100mm
- CRI typical 80+ and 90+ options
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP65 Flexible Strip
- Water proof silicon sleeve in IP65 version
- Custom power and length upon request
- Separate order of power supply is available upon request
- SDCM Step 3, high colour temperature stability



IP20 Version


MX 6456 - G2 - [] - [] - 24V - PM



Code	Power	Code	CRI	Code	CCT
2.0	2.0W/m	8	80+	27	2700K
4.8	4.8W/m	9	90+	30	3000K
6.6	6.6W/m			35	3500K
9.6	9.6W/m			40	4000K

24V DC, 60pcs LEDs/m, 9.6W/m, 936lm/m, CRI80+ (3000K)

24V DC, 60pcs LEDs/m, 9.6W/m, 838lm/m, CRI90+ (3000K)



IP65 Version


MX 6457 - G2 - [] - [] - 24V - PM




Code	Power	Code	CRI	Code	CCT
4.8	4.8W/m	8	80+	27	2700K
6.6	6.6W/m	9	90+	30	3000K
9.6	9.6W/m			35	3500K
				40	4000K

24V DC, 60pcs LEDs/m, 9.6W/m, 936lm/m, CRI80+ (3000K)


24V DC, 60pcs LEDs/m, 9.6W/m, 838lm/m, CRI90+ (3000K)



1:1 Scale

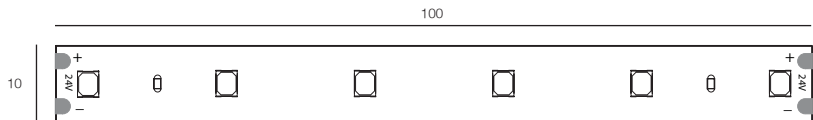


MX 6456

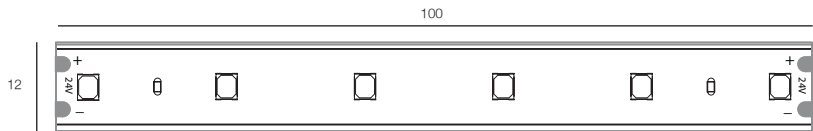

MX 6457 (IP65 Version)

Connection Details


Maximum 5 meters in LINEAR CONNECTION

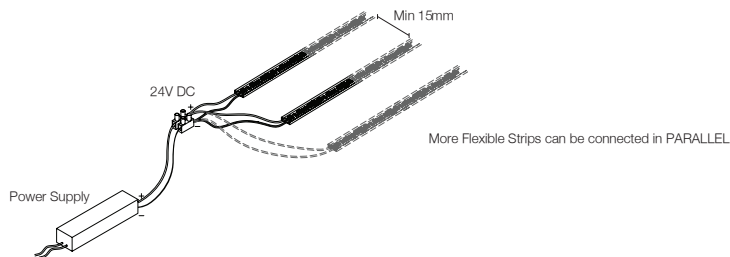


Accessory

LEDStrip Plastic Clip (for IP65 version only)

MX 6355 - PM



MX 6355 - L20



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip Mini	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip Duo

- Easy to bend for flexible design
- Cutting unit 25mm
- CRI typical 80+ and 90+ options
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP65 Flexible Strip
- Water proof silicon sleeve in IP65 version
- Custom power and length upon request
- Separate order of power supply is available upon request
- SDCM Step 3, high colour temperature stability
- High power version



IP20 Version


MX 6488 - G2 - [] [] - [] [] - 24V - PM



Code	Power	Code	CCT	Code	CCT
2.0	2.0W/m	8	80+	27	2700K
4.8	4.8W/m	9	90+	30	3000K
9.6	9.6W/m			35	3500K
14.4	14.4W/m			40	4000K

◇ 24V DC, 240pcs LEDs/m, 19.2W/m, 2285lm/m, CRI80+ (3000K)

◇ 24V DC, 240pcs LEDs/m, 19.2W/m, 2064lm/m, CRI90+ (3000K)



IP65 Version


MX 6489 - G2 - [] [] - [] [] - 24V - PM




Code	Power	Code	CCT	Code	CCT
4.8	4.8W/m	8	80+	27	2700K
9.6	9.6W/m	9	90+	30	3000K
14.4	14.4W/m			35	3500K
				40	4000K

◇ 24V DC, 240pcs LEDs/m, 19.2W/m, 2285lm/m, CRI80+ (3000K)


◇ 24V DC, 240pcs LEDs/m, 19.2W/m, 2064lm/m, CRI90+ (3000K)



1:1 Scale

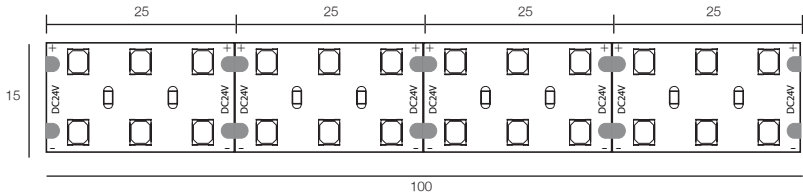


MX 6488

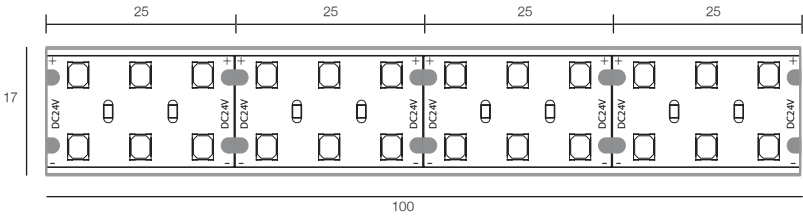

MX 6489 (IP65 Version)

Connection Details

Maximum 5 meters in LINEAR CONNECTION

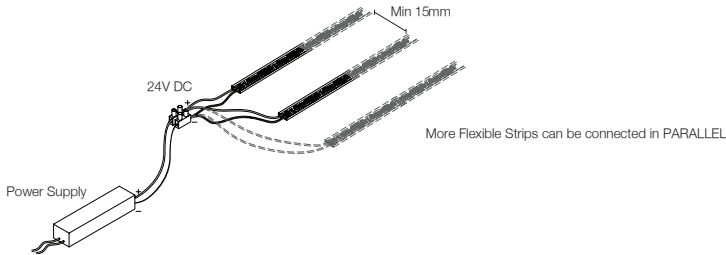

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip Duo	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

CC LED Strip

- LED strip length 20m in linear connection by single 24V power port
- Easy to bend for flexible design
- Cutting unit 50mm
- CRI typical 90+
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP65 Flexible Strip
- Water proof silicon sleeve in IP65 version
- Custom power and length upon request
- Separate order of power supply is available upon request
- SDCM step 3, high colour temperature stability




IP20 Version

AP LT 7120- G2 - [] [] - 9 [] [] - 24V - PM



Code	Power	Code	CCT
4.8	4.8W/m	27	2700K
9.6	9.6W/m	30	3000K
14.4	14.4W/m	35	3500K
		40	4000K

24V DC, 120pcs LEDs/m, 14.4W/m, 1368lm/m, CRI90+ SMD2835 (3000K)




IP65 Version

AP LT 7121- G2 - [] [] - 9 [] [] - 24V - PM




Code	Power	Code	CCT
4.8	4.8W/m	27	2700K
9.6	9.6W/m	30	3000K
14.4	14.4W/m	35	3500K
		40	4000K


24V DC, 120pcs LEDs/m, 14.4W/m, 1368lm/m, CRI90+ SMD2835 (3000K)



1:1 Scale

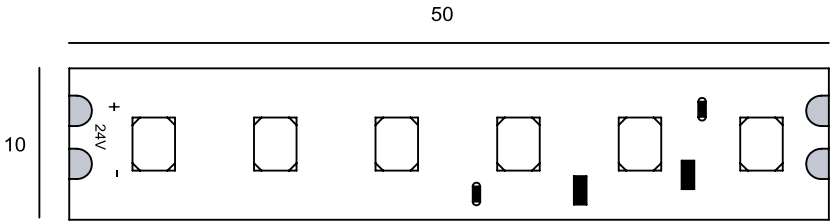


AP LT7120

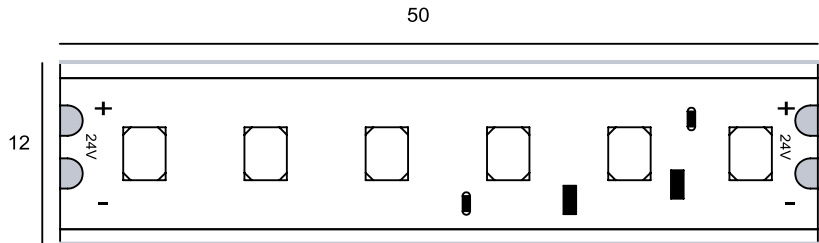

AP LT7121 (IP65 Version)

Connection Details


Maximum 20 meters in LINEAR CONNECTION

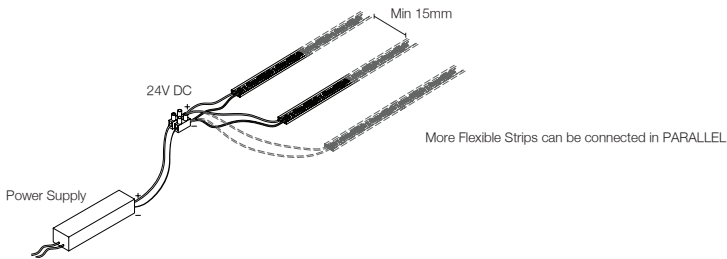


Accessory

LEDStrip Plastic Clip (for IP65 version only)

MX 6355 - PM



MX 6355 - L20



LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	CC LED Strip	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LED Vertical Strip

- Easy to bend for flexible design (side bend)
- DC 24V vertical LED Strip
- CRI Typical 80+
- 3M adhesive in the Flexible Strip
- Cutting unit 50mm
- Water proof silicon sleeve in IP65 version
- Custom power and length upon request
- Separate order of power supply is available upon request




IP20 Version

AP LT 7111 - 9.6 - - 24V - PM



Code	CCT
27	2700K
30	3000K
40	4000K

24V DC, 120pcs LEDs/m, 9.6W/m, 864lm/m, CRI80+ (3000K)




IP65 Version

AP LT 7112 - 9.6 - - 24V - PM




Code	Power
27	2700K
30	3000K
40	4000K


24V DC, 120pcs LEDs/m, 9.6W/m, 864lm/m, CRI80+ (3000K)



1:1 Scale

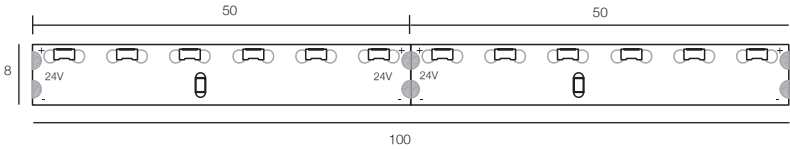


AP LT 7111

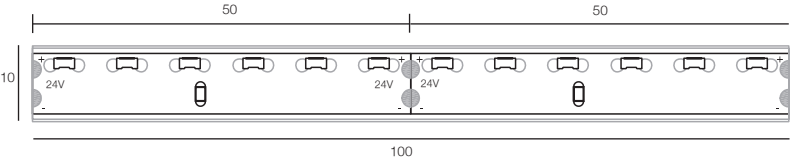

AP LT 7112 (IP65 Version)

Connection Details

Maximum 5 meters in LINEAR CONNECTION

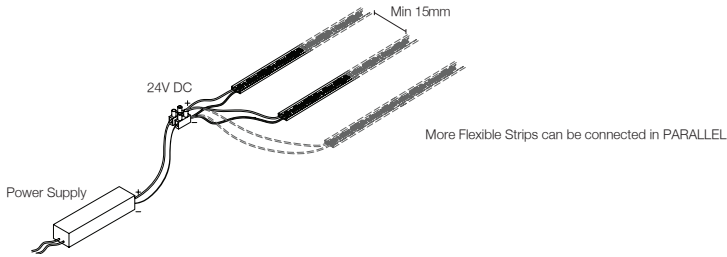

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LED Vertical Strip	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip Dual

- Vary from 2700K to 4000K
- Cutting unit 50mm
- CRI typical 80+ and 90+ options
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP65 Flexible Strip
- Water proof silicon sleeve in IP65 version
- Custom power and length upon request
- Separate order of power supply is available upon request
- SDCM Step 3, high colour temperature stability
- CCT Tunable system will be provided upon request




IP20 Version

MX 6463 - G2 - 2740 - 12 V - PM



Code	CCT
8	80+
9	90+

- ◇ 12V DC, 60pairs LEDs/m, 9.6W/m, 936lm/m, CRI80+ (3000K)
- ◇ 12V DC, 60pairs LEDs/m, 9.6W/m, 838lm/m, CRI90+ (3000K)




IP65 Version

MX 6464 - G2 - 2740 - 12 V - PM





Code	CCT
8	80+
9	90+


- ◇ 24V DC, 240pcs LEDs/m, 19.2W/m, 2285lm/m, CRI80+ (3000K)
- ◇ 24V DC, 240pcs LEDs/m, 19.2W/m, 2064lm/m, CRI90+ (3000K)



1:1 Scale

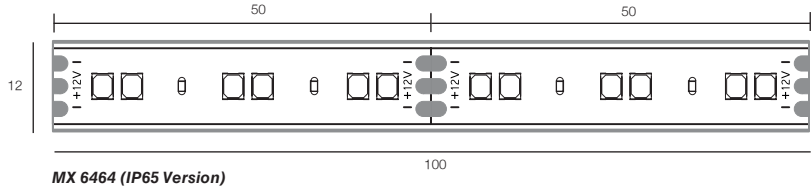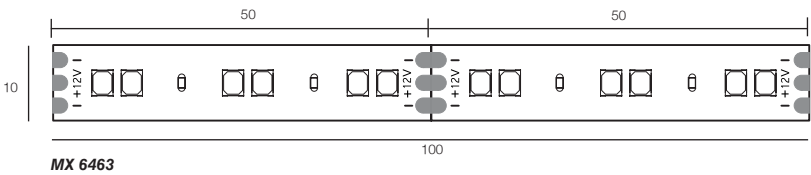


Connection Details

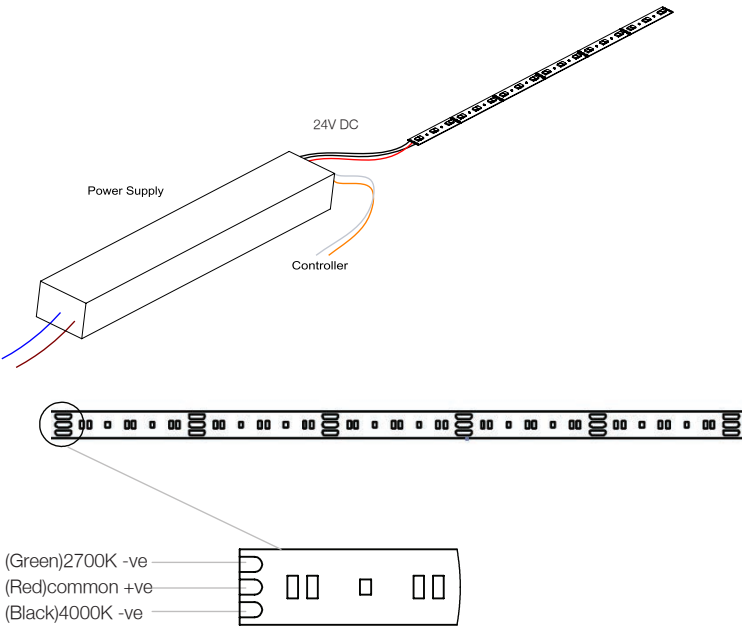


Accessory

LEDStrip Plastic Clip (for IP65 version only)

MX 6355 - PM



MX 6355 - L20




LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-12V-60TWD-AI(43)	0 - 60W	LED Strip Dual	12V DC, 0-10V Dimmable	320 x 73 x 41	Ø85
EC LED-12V-100TWD-AI(43)	0 - 100W				
EC LED-12V-120TWD-AI(43)	0 - 120W				

RGB LED Strip

- Easy to bend for flexible design
- Cutting unit 100mm
- DC 24V 5050 SMD LED Flexible Strip, 14.4W per meter
- High Lumen Output
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP65 Flexible Strip
- Water proof silicon sleeve in IP65 version
- Custom power and length upon request
- Separate order of power supply is available upon request




IP20 Version



AP LT 7115 - 14.4 - RGB - 24V - PM

24V DC, 60pcs LEDs/m, 14.4W/m, 400lm/m (3000K)




IP65 Version





AP LT 7116 - 14.4 - RGB - 24V - PM



24V DC, 60pcs LEDs/m, 14.4W/m, 400lm/m (3000K)



1:1 Scale

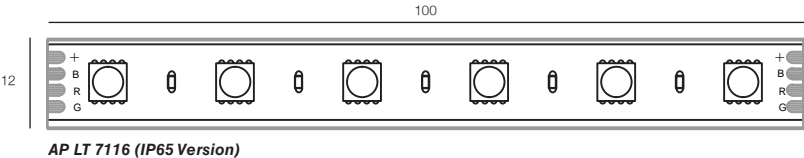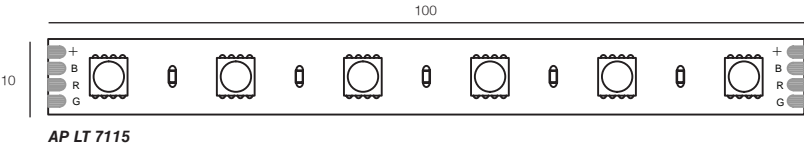


Connection Details

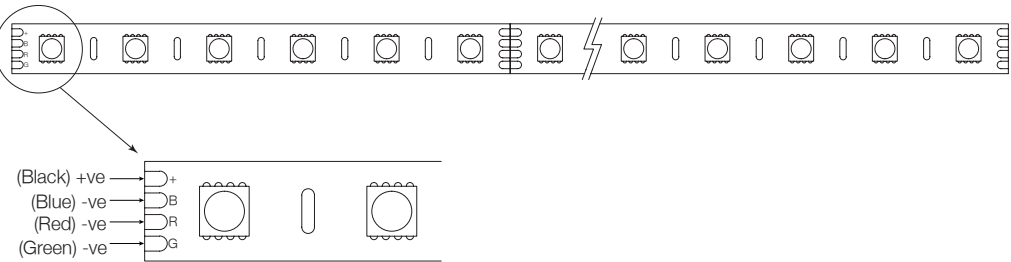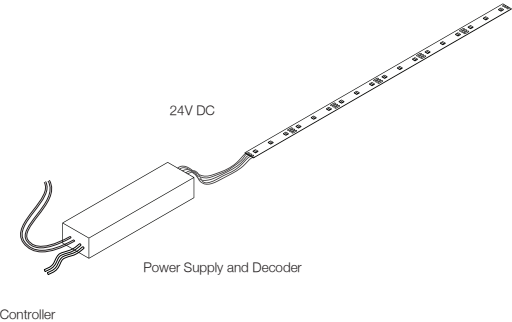


Accessory

LEDStrip Plastic Clip (for IP65 version only)

MX 6355 - PM



MX 6355 - L20




LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-150DMX-4CH-LH(38)	0 - 150W	RGB LED Strip	24V DC	450 x 70 x 50	Ø90

RGBW LED Strip

- Easy to bend for flexible design
- Cutting unit 100mm
- DC 24V vertical LED Strip
- CRI typical 80+
- 3M adhesive in the Flexible Strip
- Water proof silicon sleeve in IP65 version
- Custom power and length upon request
- Separate order of power supply is available upon request




IP20 Version

AP LT 7130 - RGBW - [] - 24V - PM



Code	CCT
27	2700K
30	3000K
40	4000K

24V DC, 60pcs LEDs/m, 19.2W/m, 1000lm/m, CRI80+ (3000K)




IP65 Version

AP LT 7131 - RGBW - [] - 24V - PM





Code	CCT
27	2700K
30	3000K
40	4000K



24V DC, 60pcs LEDs/m, 19.2W/m, 1000lm/m, CRI80+ (3000K)



1:1 Scale

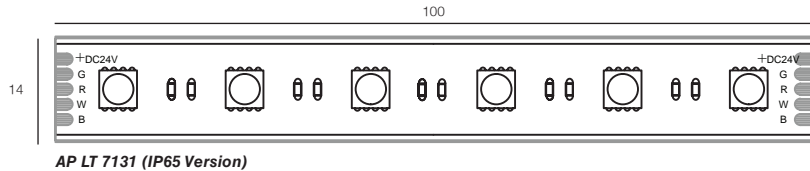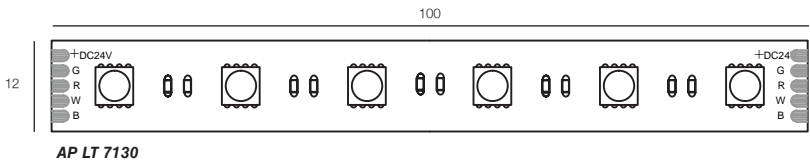

Connection Details

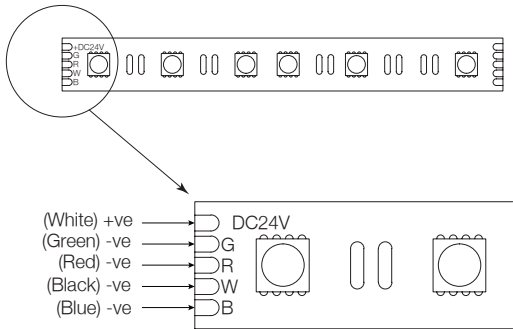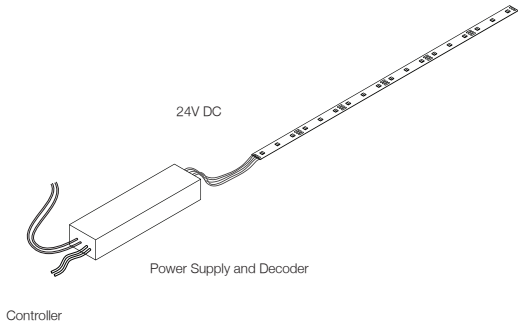

LED Driver					
Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-150DMX-4CH-LH(38)	0 - 150W	RGBW LED Strip	24V DC	450 x 70 x 50	Ø90

LEDStrip S Pro

- DC 24V 2835 SMD LED Flexible Strip, 13.2W per meter
- CRI typical 80+ and 90+ options
- High Lumen Output
- SDCM 3 Step, high colour temperature stability
- Dimmable version available upon request
- Tunable white/ RGB version upon request
- Custom power and length upon request
- Separate order of power supply is available upon request




Standard Version

MX 6493 - V2 - [] [] [] [] - 24V - [] [] [] []

Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80+	27	2700K	0520	520mm	60 x LED, 6.6W
9	90+	30	3000K	1020	1020mm	120 x LED, 13.2W
		35	3500K			
		40	4000K			

- 24V DC, 120pcs LEDs/m, 13.2W/m, 1486lm/m, CRI80+ (3000K)
- 24V DC, 120pcs LEDs/m, 13.2W/m, 1330lm/m, CRI90+ (3000K)

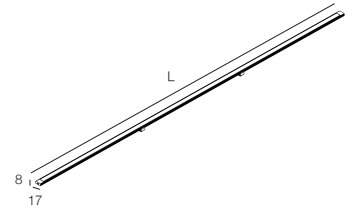


Sensor Version


MX 6493 - V2 - [] [] [] [] - 24V - [] [] [] [] - SV

Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80+	27	2700K	0550	550mm	60 x LED, 6.6W
9	90+	30	3000K	1050	1050mm	120 x LED, 13.2W
		35	3500K			
		40	4000K			

- 24V DC, 120pcs LEDs/m, 13.2W/m, 1486lm/m, CRI80+ (3000K)
- 24V DC, 120pcs LEDs/m, 13.2W/m, 1330lm/m, CRI90+ (3000K)

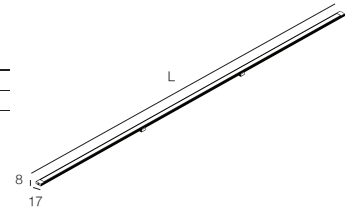


1:1 Scale

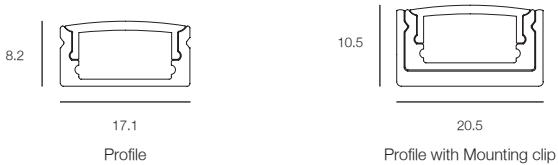

Connection Details

Maximum 5 meters in LINEAR CONNECTION

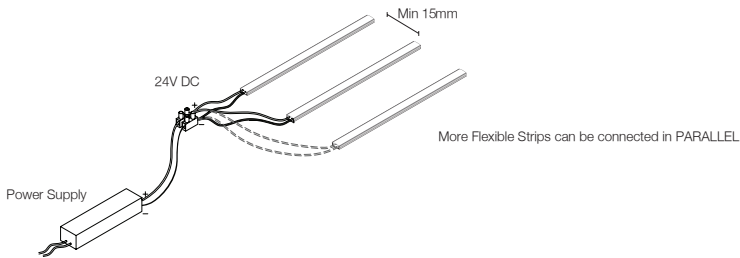

LED Driver

Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip S Pro	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip Pro

- DC 24V 2835 SMD LED Flexible Strip, 13.2W per meter
- CRI typical 80+ and 90+ options
- High Lumen Output
- SDCM 3 Step, high colour temperature stability
- Dimmable version available upon request
- Tunable white/ RGB version upon request
- Custom power and length upon request
- Separate order of power supply is available upon request




MX 6494 - V2 - - 24V -


Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80+	27	2700K	0520	520mm	60 x LED, 6.6W
9	90+	30	3000K	1020	1020mm	120 x LED, 13.2W
		35	3500K			
		40	4000K			

◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1486lm/m, CRI90+ (3000K)

◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1330lm/m, CRI90+ (3000K)

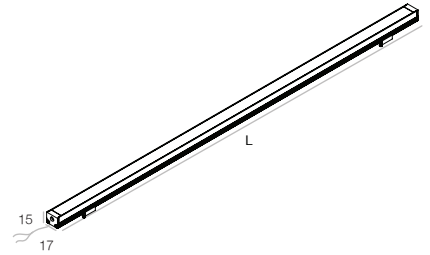


1:1 Scale

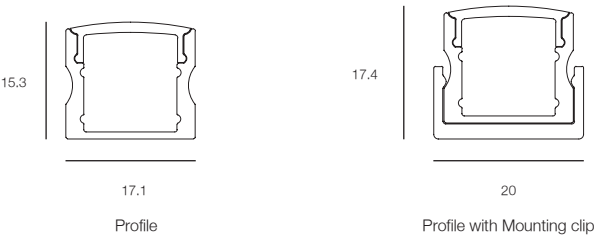

Connection Details

Maximum 5 meters in LINEAR CONNECTION

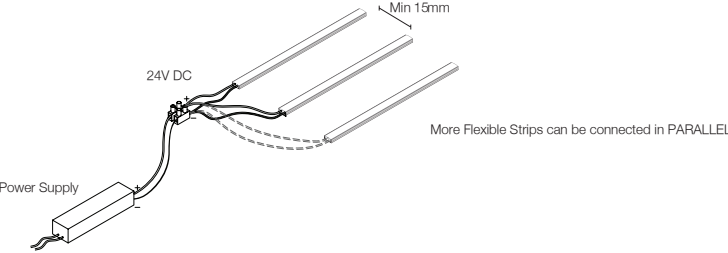

LED Driver					
Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip Pro	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip Stick

- DC 24V 2835 SMD LED Flexible Strip, 13.2W per meter
- CRI typical 80+ and 90+ options
- High Lumen Output
- SDCM 3 Step, high colour temperature stability
- Dimmable version available upon request
- Tunable white/ RGB version upon request
- Custom power and length upon request
- Separate order of power supply is available upon request




MX 6491 - V2 - - 24V -



Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80+	27	2700K	0520	520mm	60 x LED, 6.6W
9	90+	30	3000K	1020	1020mm	120 x LED, 13.2W
		35	3500K			
		40	4000K			

◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1486lm/m, CRI90+ (3000K)

◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1330lm/m, CRI90+ (3000K)

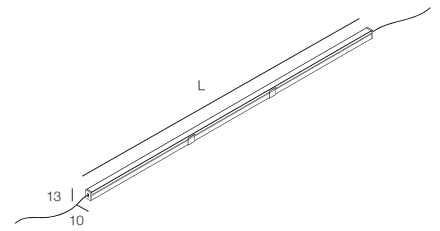


1:1 Scale



Connection Details

Maximum 5 meters in LINEAR CONNECTION

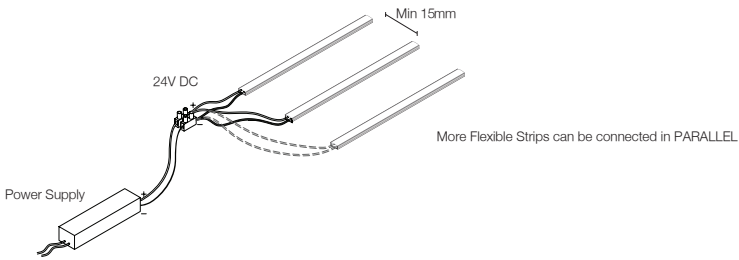

LED Driver					
Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip Stick	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip L Pro

- DC 24V 2835 SMD LED Flexible Strip, max 19.2W per meter
- CRI typical 80+ and 90+ options
- High Lumen Output
- SDCM 3 Step, high colour temperature stability
- Dimmable version available upon request
- Tunable white/ RGB version upon request
- Custom power and length upon request
- Separate order of power supply is available upon request




Standard Version

MX 6490 - V2 - - 24V -

Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80+	27	2700K	0520	520mm	60 x LED, 6.6W
9	90+	30	3000K	1020	1020mm	120 x LED, 13.2W
		35	3500K			
		40	4000K			

◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1486lm/m, CRI80+ (3000K)

◇ 24V DC, 120pcs LEDs/m, 13.2W/m, 1330lm/m, CRI90+ (3000K)

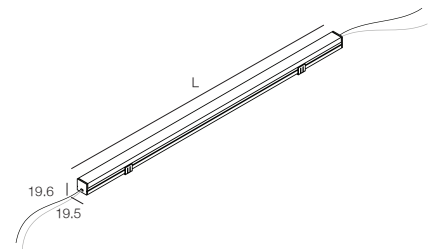

High-Power Version


MX 6492 - V2 - - 24V -

Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80+	27	2700K	0550	550mm	60 x LED, 6.6W
9	90+	30	3000K	1050	1050mm	120 x LED, 13.2W
		35	3500K			
		40	4000K			

◇ 24V DC, 240pcs LEDs/m, 19.2W/m, 2340lm/m, CRI80+ (3000K)


◇ 24V DC, 240pcs LEDs/m, 19.2W/m, 2114lm/m, CRI90+ (3000K)

1:1 Scale

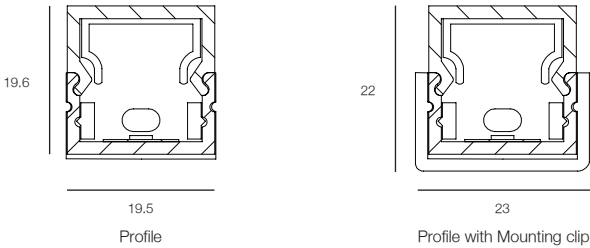

Connection Details

Maximum 5 meters in LINEAR CONNECTION

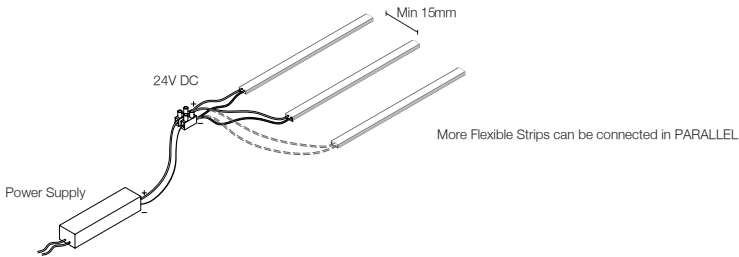

LED Driver					
Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip L Pro	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip N Stick

- DC 24V 2835 SMD LED Flexible Strip, 10W per meter
- CRI typical 80+ and 90+ options
- High Lumen Output
- SDCM 3 Step, high colour temperature stability
- Dimmable version available upon request
- Custom power and length upon request
- Separate order of power supply is available upon request
- 20° beam angle





MX 6495 - V2 - - 24V -

Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80+	27	2700K	0520	520mm	60 x LED, 6.6W
9	90+	30	3000K	1020	1020mm	120 x LED, 13.2W
		35	3500K			
		40	4000K			

◇ 24V DC, 192pcs LEDs/m, 10W/m, 1180lm/m, CRI80+ (3000K)

◇ 24V DC, 192pcs LEDs/m, 10W/m, 1058lm/m, CRI90+ (3000K)

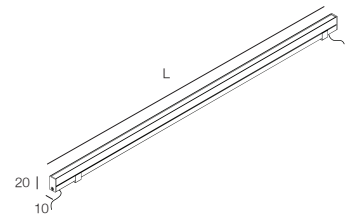


MX 6495-V2-830-24V

1:1 Scale



Connection Details

Maximum 5 meters in LINEAR CONNECTION

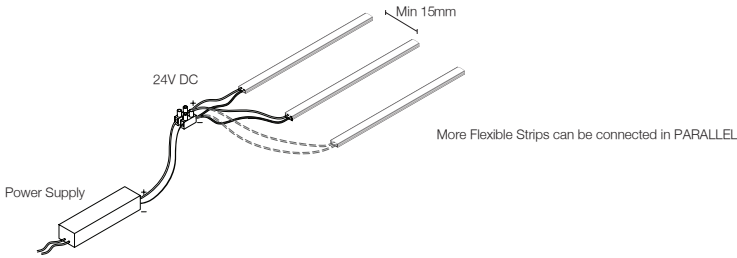

LED Driver					
Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip N Stick	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

LEDStrip Pro Corner

- DC 24V 2835 SMD LED Flexible Strip, 13.2W per meter
- CRI typical 80+ and 90+ options
- High Lumen Output
- SDCM 3 Step, high colour temperature stability
- Dimmable version available upon request
- Tunable white/ RGB version upon request
- Custom power and length upon request
- Separate order of power supply is available upon request




MX 6462 - V2 - - 24V -


Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80+	27	2700K	0520	520mm	60 x LED, 6.6W
9	90+	30	3000K	1020	1020mm	120 x LED, 13.2W
		35	3500K			
		40	4000K			

☞ 24V DC, 120pcs LEDs/m, 13.2W/m, 1486lm/m, CRI90+ (3000K)


☞ 24V DC, 120pcs LEDs/m, 13.2W/m, 1330lm/m, CRI90+ (3000K)

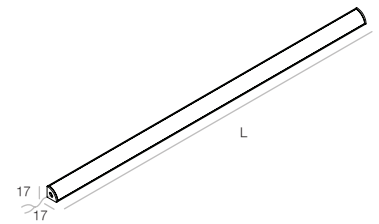

1:1 Scale




Profile



Profile with Mounting clip

Connection Details

Maximum 5 meters in LINEAR CONNECTION

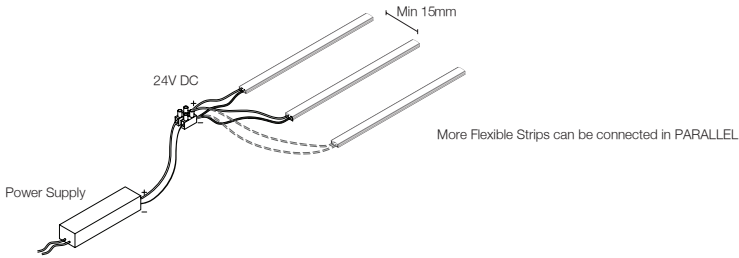

LED Driver					
Ordering Code	Driving Power Range	Matching with LED Fitting	Output Voltage	Wiring Box Dimension(mm) (L) x (W) x (H)	Cut Hole (mm)
EC LED-24V-60-PH(43)	3 - 60W	LEDStrip Pro Corner	24V DC	320 x 73 x 41	Ø85
EC LED-24V-120-PH(41)	3 - 120W			350 x 102 x 41	Ø110
EC LED-24V-60D-AS-PH(38)	0 - 60W		24V DC, 1-10V Dimmable	450 x 70 x 50	Ø90
EC LED-24V-150D-AS-PH(38)	0 - 150W				

Index by Ordering Number

Ordering Number	Page	Ordering Number	Page	Ordering Number	Page
AP-KH M20A	112	MX 5521D9P-G2-900	119	MX 6460-G2	164
AP-KH M20B	112	MX 5521D9P-G2-1200	119	MX 6461-G2	164
AP- KH M20C	112	MX 5522D9P-G2-600	120	MX 6462-V2	206
AP- KH M20D	112	MX 5522D9P-G2-900	120	MX 6463-G2	190
AP-KH M211-20A	112	MX 5522D9P-G2-1200	120	MX 6464-G2	190
AP-KH M211-20B	112	MX 5837	144	MX 6468-G2	180
AP-KH M211-20C	112	MX 5838	144	MX 6469-G2	180
AP-KH M211-20D	112	MX 5851	140	MX 6488-G2	184
AP-KH M312-G2	113	MX 5851C	140	MX 6489-G2	184
AP-KH M313	113	MX 5852	140	MX 6490-V2	202
AP-KH M316	113	MX 5852C	140	MX 6491-V2	200
AP-KH M317	113	MX 5853	141	MX 6492-V2	202
AP-KH M391	113	MX 5853C	141	MX 6493-V2	196
AP-KH M392	113	MX 5855	147	MX 6493-V2...- SV	196
AP LT 7111	188	MX 5855C	147	MX 6494-V2	198
AP LT 7112	188	MX 5858	142	MX 6495-V2	204
AP LT 7115-14.4-RGB-24V-PM	192	MX 5860	143	MX 6496-G4-600	111
AP LT 7116-14.4-RGB-24V-PM	192	MX 5861	143	MX 6496-G4-1200	111
AP LT 7120	186	MX 5874	146	MX 6497-G4-125	109
AP LT 7121	186	MX 5875	146	MX 6497-G4-245	109
AP LT 7122	168	MX 5878	145	MX 6497-G4-365	109
AP LT 7123	168	MX 5879	145	MX 6499-G4-110	110
AP LT 7130-RGBW	194	MX 5923	72	MX 6499-G4-220	110
AP LT 7131-RGBW	194	MX 5924	72	MX 6838P	152
AP LT 7140-V1	172	MX 5925	72	MX 6839P	152
AP LT 7141-V1	170	MX 5949-10	144	MX 6840-M	136
MX 3911	163	MX 6355-L20	181	MX 7319C-G6	33
MX 3912	160	MX 6355-PM	181	MX 7319-G6	33
MX 3921	47	MX 6373-G7	100	MX 7328-13T8...-G5	73
MX 3923	49	MX 6374-G7	100	MX 7329-13T8...-G5	73
MX 3924-10	47	MX 6383-G6	101	MX 7334D-G7	92
MX 3930	174	MX 6384-G6	101	MX 7334S-G7	92
MX 3931	174	MX 6385-G7	99	MX 7334T-G7	92
MX 3932	175	MX 6386-G7	99	MX 7348-13T9...-G5	73
MX 3933	176	MX 6387-G7	106	MX 7349-13T9...-G5	73
MX 5397-G6	28	MX 6403-G7	102	MX 7350-G5	31
MX 5399-G6	28	MX 6404-G7	102	MX 7352-G5	30
MX 5472-M	134	MX 6412-G6	98	MX 7354D-G6	81
MX 5473-M	134	MX 6421-G7	107	MX 7354S-G6	81
MX 5474	137	MX 6422-G7	108	MX 7354T-G6	81
MX 5476	139	MX 6423-G3-14-600	163	MX 7356-G6	81
MX 5495	139	MX 6423-G3-28-1200	163	MX 7358D-G6	82
MX 5508D9P-G3-600	128	MX 6424-G3-21-600	162	MX 7358S-G6	82
MX 5508D9P-G3-900	128	MX 6424-G3-42-1200	162	MX 7358T-G6	82
MX 5508D9P-G3-1200	128	MX 6425-G3-14-600	160	MX 7366-G5	30
MX 5510D9P-G3-600	129	MX 6425-G3-28-1200	160	MX 7376-G6	29
MX 5510D9P-G3-900	129	MX 6450	166	MX 7376-G6-F	29
MX 5510D9P-G3-1200	129	MX 6451	166	MX 7380C-G6	27
MX 5510D9P-G3-TW-600	130	MX 6453-G2	174	MX 7380-G6	27
MX 5510D9P-G3-TW-900	130	MX 6454-G2	175	MX 7384-G6	75
MX 5510D9P-G3-TW-1200	130	MX 6455-G2	176	MX 7385-G6	75
MX 5520D9P-G2-600	118	MX 6456-G2	182	MX 7395-G5	32
MX 5520D9P-G2-900	118	MX 6457-G2	182	MX 7396-G5	32
MX 5520D9P-G2-1200	118	MX 6458-G2	178	MX 7397-G5	32
MX 5521D9P-G2-600	119	MX 6459-G2	178	MX 7398AS-G6	123

<i>Ordering Number</i>	<i>Page</i>	<i>Ordering Number</i>	<i>Page</i>	<i>Ordering Number</i>	<i>Page</i>
MX 7398 - G6	122	MX 7482D-13T8...-G5	78	MX 9116S-M	151
MX 7399AS-G6	123	MX 7482S-13T8...-G5	78	MX 9116T-MMM	151
MX 7399-G6	122	MX 7482S-13T8...-G5	78	MX 9143-M	148
MX 7401-G5	72	MX 7482T-13T8...-G5	78	MX 9157D	135
MX 7402-G5	72	MX 7483-G7	68	MX 9157S	135
MX 7407	43	MX 7484-G7	67	MX 9162D-MM	149
MX 7411	49	MX 7485-G7	67	MX 9162S-M	149
MX 7411C	49	MX 7488-G7	64	MX 9162T-MMM	149
MX 7413-G6	76	MX 7490	50	MX 9175D-MM	153
MX 7414-G7	76	MX 7491	50	MX 9175S-M	153
MX 7420-G6	63	MX 7495-G7	66	MX 9175T-MMM	153
MX 7421-G6	63	MX 7496AS-G6	125	MX 9924	156
MX 7425	47	MX 7496AS-G6...-TW	121	MX 9925	156
MX 7425C	47	MX 7496-G6	124	MX 9955	156
MX 7426	47	MX 7497AS-G6	125	MX 9958	156
MX 7426C	47	MX 7497AS-G6...-TW	121	MX 9974	156
MX 7427	48	MX 7497-G6	124	MX 9975	156
MX 7427C	48	MX 7497-G6	124	MX 9976	156
MX 7428-G6	74	MX 7498AS-G6	127	MX 9980	157
MX 7429-G6	74	MX 7498AS-G6	127	MX 9981	157
MX 7441-13T8...-G6	88	MX 7498-G6	126	MX 9982	157
MX 7442-13T8...-G6	88	MX 7498-G6	126	MX 9983	157
MX 7450	45	MX 7499AS-G6	127	MX 9984	157
MX 7451	46	MX 7499AS-G6	127	MX 9985	157
MX 7452	45	MX 7499-G6	126	MX 9986	157
MX 7454D-G6	79	MX 7499-G6	126	MX 9987	157
MX 7454S-G6	79	MX 7501-G7	26	MX AS-600	121
MX 7454T-G6	79	MX 7502-G7	26	MX AS-1200	121
MX 7456-G6	79	MX 7601-G6	69	MX TIK41LD	54
MX 7457D	61	MX 7602-G6	69	MX TIK41LS	54
MX 7457S	61	MX 7603-G6	70	MX TIK41LT	54
MX 7458D-G6	80	MX 7604-G6	70	MX TIK52D	78
MX 7458S-G6	80	MX 7614-G7	90	MX TIK52S	78
MX 7458T-G6	80	MX 7615-G7	90	MX TIK52T	78
MX 7460	52	MX 7616C-G6	71	P7-M10D-6.7	154
MX 7462	52	MX 7616-G6	71	P7-M11D-6.5	154
MX 7463	51	MX 7617C-G6	71	P7-M11D-7.5	154
MX 7464D	53	MX 7617-G6	71	V7-M7D-9	155
MX 7464S	53	MX 7622-09OB...-G6	62		
MX 7464T	53	MX 7622-09OBV9530-G6	62		
MX 7465D	54	MX 7623-09OB...-G6	62		
MX 7465S	54	MX 7623-09OBV9530-G6	62		
MX 7465T	54	MX 7634D-09OB...-G7	91		
MX 7466	53	MX 7634S-09OB...-G7	91		
MX 7467	44	MX 7634T-09OB...-G7	91		
MX 7468-G7	60	MX 7641-G6	89		
MX 7469-G6	60	MX 7642-G6	89		
MX 7475-G7	64	MX 9112D-MM	148		
MX 7476-G7	66	MX 9112S-M	148		
MX 7477-G7	65	MX 9112T-MMM	148		
MX 7478	51	MX 9114D-MM	150		
MX 7480	44	MX 9114S-M	150		
MX 7481D-13T8...-G5	77	MX 9114T-MMM	150		
MX 7481S-13T8...-G5	77	MX 9115-M	150		
MX 7481T-13T8...-G5	77	MX 9116D-MM	151		

Index by Product Name - LED Series

Product Name	Page	Product Name	Page
Accessory	156	Line 60	119
Armbox IB	99	Line 80	120
Armbox MT	106	Magnetic Grille	109
Atec COB	63	Magnetic Grille Adjustable	110
Atec XOB	62	Magnetic Linear	111
B-Extal	129	Magnetic Track Accessory	112
B-Extal Tunable White	130	Master	26
B. Spot	74	Mini Armbox	101
CC LED Strip	186	Mini Glee	67
CHESS	60	Mini Glee Spot	68
Club	88	Mini Glek MT	108
Club COB	89	Mini IB	102
DIP (Anti Glare Microfilm Version)	124	Mini Trim	51
DIP (Anti Glare Microfilm with Air Slot Version)	125	Mini Trim Sq	52
DIP (Diffuser Version)	122	Multi Box Lite COB	90
DIP (Diffuser with Air Slot Version)	123	Multi Box Mini COB AT	92
DIP (Metal Mesh Hole Version)	126	Multi Box Mini XOB AT	91
DIP (Metal Mesh Hole with Air Slot Version)	127	Multi Cage	61
DIP Tunable White (Anti Glare Microfilm with Air Slot Version)	121	Multi Mini COB AT	81
Domi/ Pomi	45	Multi Mini COB Trimless AT	82
Exxi	29	Multi Mini Spot COB	79
FreePlus COB Module	40	Multi Mini Spot COB Trimless	80
FreePlus Narrow Spot COB Module	41	Multi Mini Xito	77
FreePlus Narrow Spot XOB Module	39	Multi Mini Xito Trimless	78
FreePlus Tunable White COB Module	42	Multi Super Mini	53
FreePlus XOB Module	38	Multi Super Mini Trimless	54
Glee	44	Neon Strip 1010	174
Glee	64	Neon Strip 1220	175
Glee Spot	66	Neon Strip 1616	176
Glee Wallwasher	65	P-Bar G3	162
Glek IB	98	P-Bar Lite G3	163
Glek MT	107	Pin Hole	47
Gones	76	Pin Hole Mini	71
Hydro LED Midi / Maxi	30	Pin Hole Sq	49
Hydro LED Mini	31	Pin Slot	48
Hydro LED Sq	32	Planar	28
LED EYE	72	Renia	50
LEDStrip	178	RGB LED Strip	192
LEDStrip COB	168	RGBW LED Strip	194
LEDStrip Corner Mini	172	S-Extal G3	128
LEDStrip Dual	190	Slim	69
LEDStrip Duo	184	Slim HP	70
LEDStrip HE	180	Somi	46
LEDStrip L Pro	202	Space	43
LEDStrip Mini	182	SurfWash	160
LEDStrip N Stick	204	TINY COB	75
LEDStrip Pro	198	TINY Sq	33
LEDStrip Pro Corner	206	TODO	27
LEDStrip S Pro	196	Tracbox COB IB	100
LEDStrip Stick	200	XITO	73
LEDStrip Stick Mini	170		
LEDStrip Thin	164		
LEDStrip Unit	166		
LED Vertical Strip	188		
Line 40	118		

Index by Product Name - MR16 LED Retrofit

Product Name	Page
Atec	143
Cybox Mini	152
Glee	137
Glee Spot	139
Glee Wallwasher	138
Master	134
Mini Trim	145
Mini Trim Sq	146
Multi Box Mini AT	153
Multi Cage	135
Multi Mini AT	148
Multi Mini Trimless AT	149
Multi Super Mini	150
Multi Super Mini Trimless	151
Philips MR16 LED Retrofit	154
Pin Hole	140
Pin Hole Sq	147
Pin Slot	141
Renia	144
SORAA MR16 LED Retrofit	155
Space	142
Tracfit	136

This catalogue is published in English

Milux LED COLLECTION 9

All rights reserved

Unauthorized copying, reproduction of this
catalogue is prohibited

Zodiac 歷程照明有限公司

ZODIAC LIGHTING LIMITED

Head Office - Project Team

1801, 18/F, Hong Man Industrial Centre, 2 Hong Man Street,
Chai Wan, Hong Kong.

香港柴灣康民街2號康民工業中心18樓1801室

Tel: (852) 2898 9023 Fax: (852) 2558 3114

